Downlights

Grill DL0777

Recessed spotlight



Recessed spotlight. 12 or 26 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø80 / Ø98 mm
- LED source: Citizen

Power **12 W, 26 W**	Voltage **max 37 V**	Luminous flux **1200 lm, 2600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0777	12 W	max 37 V	1200 lm	97 CRI	Ø90 × 93 mm	Ø80 mm	15° 24° 36° 60°	350 mA
DL1319	26 W	max 37 V	2600 lm	97 CRI	Ø105 × 104 mm	Ø98 mm	15° 24° 36° 60°	700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1319, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1319, 26 W, 15° beam

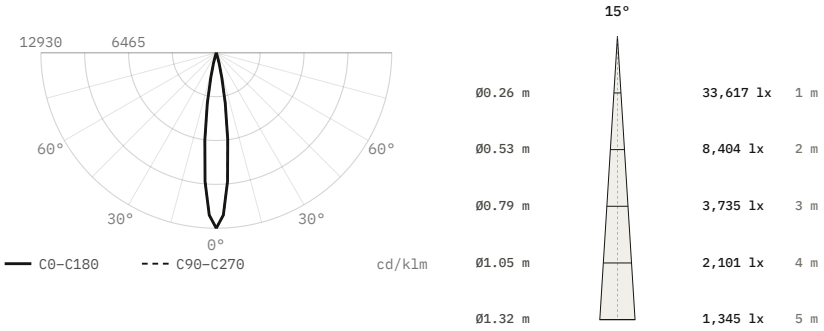


Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø105 × 104 mm
Data	Calculated from catalogue data

DL1319, 26 W, 24° beam

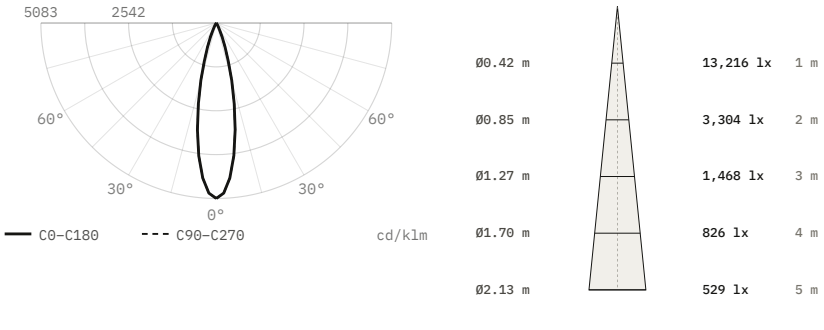


Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	13,216 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø105 × 104 mm
Data	Calculated from catalogue data


DL1319, 26 W, 36° beam

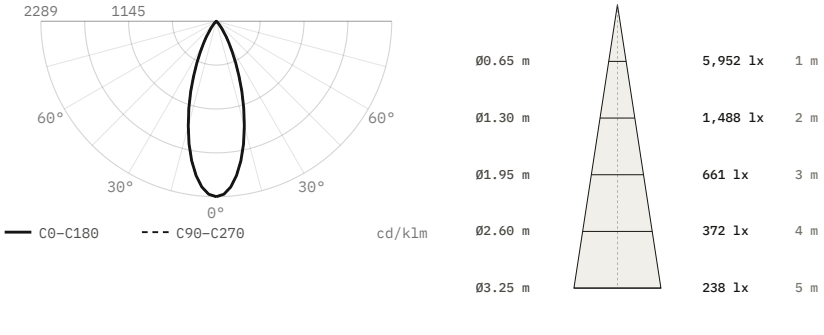

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	5,952 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø105 × 104 mm
Data	Calculated from catalogue data

DL1319, 26 W, 60° beam

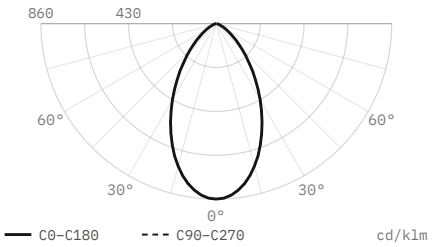

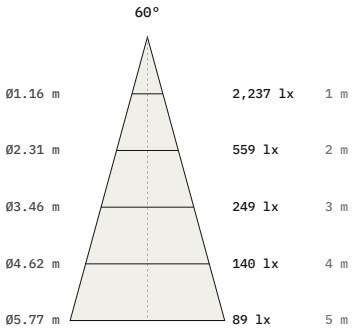

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	2,237 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø105 × 104 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.