
Downlights

L18

Recessed spotlight

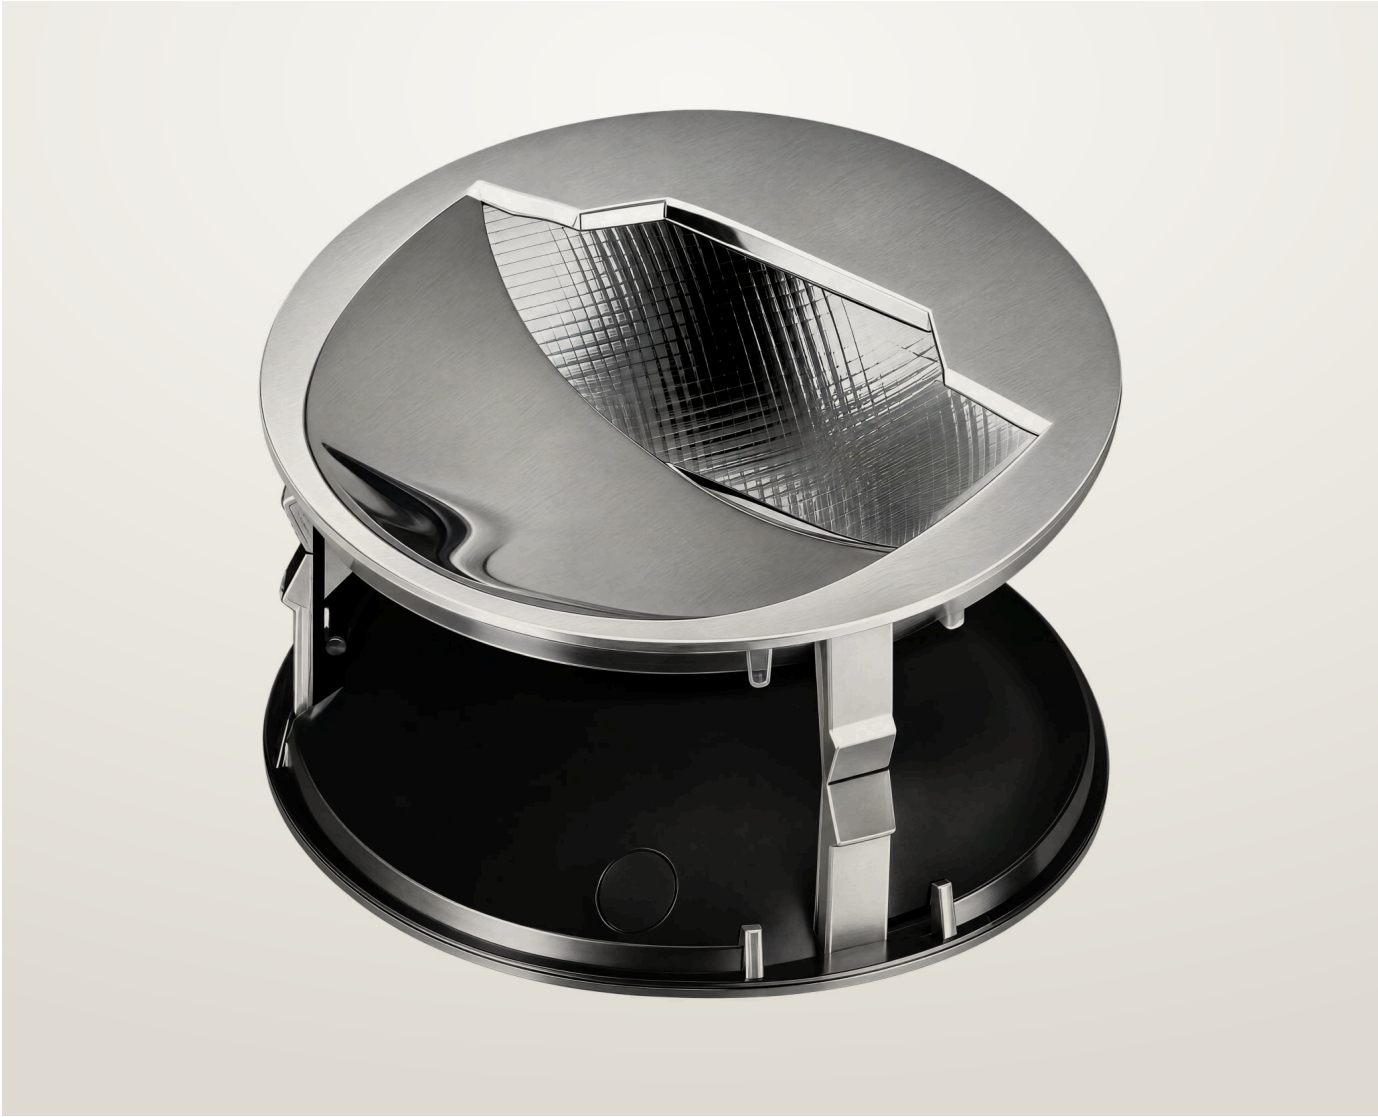



Recessed spotlight. 10 or 15 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø57 / Ø75 mm
- LED source: Citizen
- UGR <12

Power	Voltage	Colour temperature
10 W, 15 W	**36 V**	**2700 K, 3000 K, 4000 K**
CRI	IP rating	Mounting
97 CRI	**IP20**	**Recessed**
Control	Finishes	
On/Off, Triac	**Black**	

Dimensions

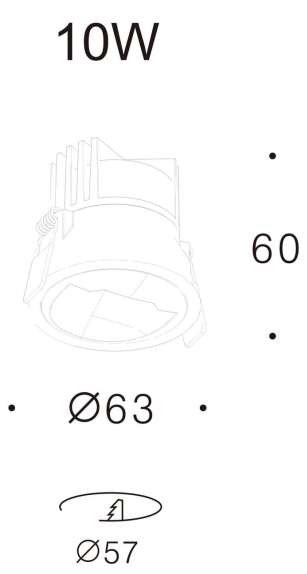

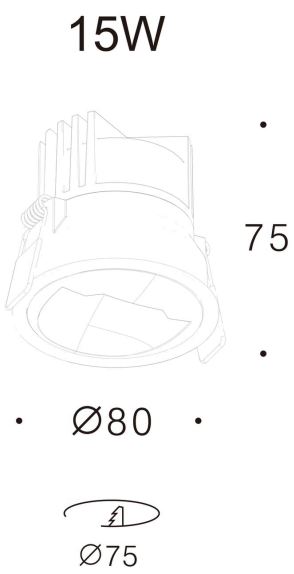


Models

Code	Version	Power	Voltage	CRI	Size	Cut-out	Notes
RE-L18-1002	Wall wash	10 W	36 V	97 CRI	Ø63 × 60 mm	Ø57 mm	250 mA
RE-L18-1502	Wall wash	15 W	36 V	97 CRI	Ø80 × 75 mm	Ø75 mm	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-L18-1502, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

RE-L18-1502, 15 W, wall washer

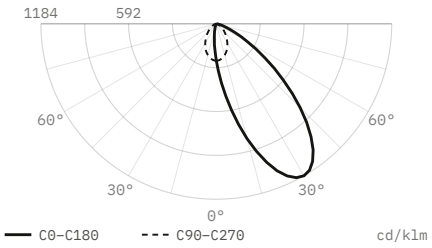

Luminous flux	**900 lm**
Efficacy	**60 lm/W**
Peak intensity	**1,065 cd, 1,184 cd/klm**
Beam angle (50%)	**asymmetric**
Cut-off angle (2.5%)	**80°**
Flux 0–30° / 30–60° / 60–90°	**29.6 / 61.1 / 9.3 %**
Size	**Ø80 × 75 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.