Ceiling

M3

Surface luminaire




Surface luminaire. 18 or 25 W. 2700, 3000, 4000, 5000 K. IP54. 97 CRI.

- LED source: Citizen

Power **18 W, 25 W**	Voltage **36 V**	Colour temperature **2700 K, 3000 K, 4000 K, 5000 K**
CRI **97 CRI**	IP rating **IP54**	Mounting **Surface**
Control **On/Off, Triac**	Finishes **Black**	

Dimensions

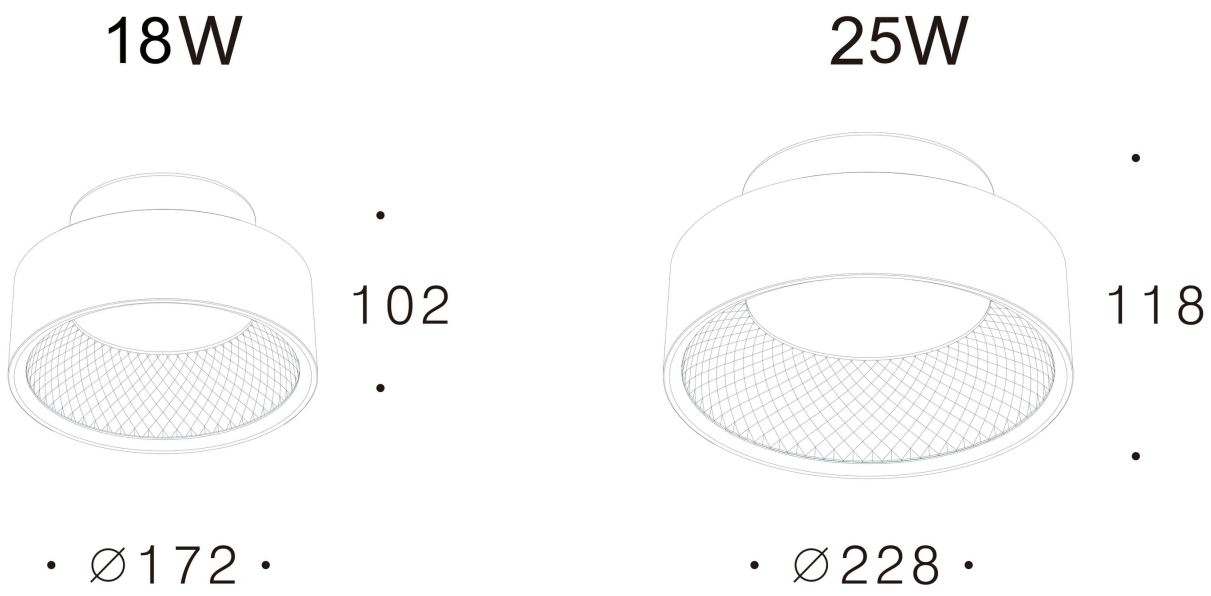


Models


Code	Power	Voltage	CRI	Size	Notes
SU-M3-1801	18 W	36 V	97 CRI	Ø172 × 102 mm	450 mA
SU-M3-2501	25 W	36 V	97 CRI	Ø228 × 118 mm	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-M3-2501, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SU-M3-2501, 25 W, wide distribution

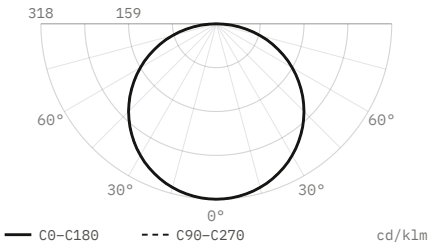

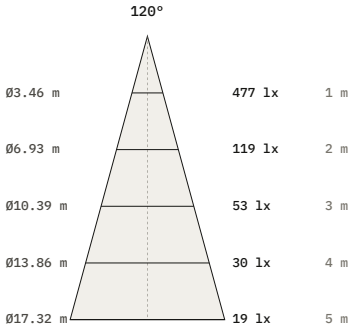

Luminous flux	**1,500 lm**
Efficacy	**60 lm/W**
Peak intensity	**477 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø228 × 118 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.