Linear

Mini

Linear luminaire



Linear luminaire. 7, 12 or 20 W. 24° or 30° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø74 / Ø116 / Ø226 mm
- LED source: Citizen
- UGR <14 (24°), <18 (30°)

Power **7 W, 12 W, 20 W**	Voltage **9 V, 15 V, 30 V**	Colour temperature **2700 K, 3000 K, 4000 K**
CRI **97 CRI**	Beam angles **24°, 30°**	IP rating **IP20**
Mounting **Recessed**	Control **On/Off, Triac**	Finishes **Black**

Dimensions

7W

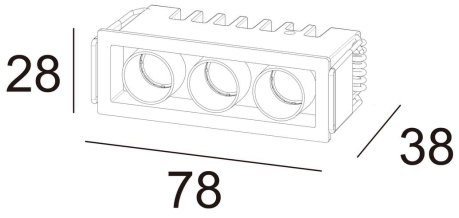



74*24

12W

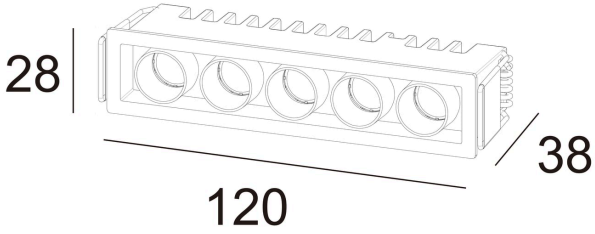



116*24

20W

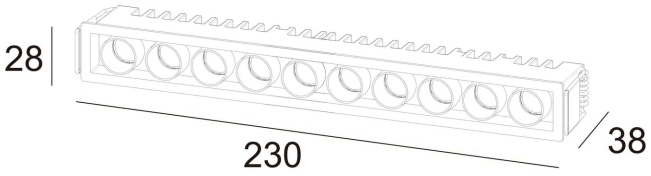



226*24

Models

Code	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
RE-MINI-3	7 W	9 V	97 CRI	L78 x W28 x D38 mm	Ø74 mm	24° 30°	700 mA
RE-MINI-5	12 W	15 V	97 CRI	L120 x W28 x D38 mm	Ø116 mm	24° 30°	700 mA
RE-MINI-10	20 W	30 V	97 CRI	L230 x W28 x D38 mm	Ø226 mm	24° 30°	600 / 700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-MINI-10, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

RE-MINI-10, 20 W, 24° beam

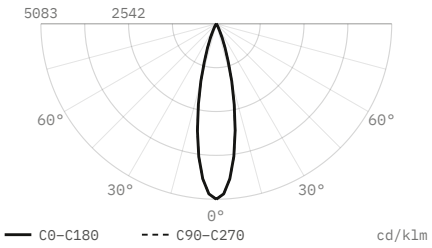

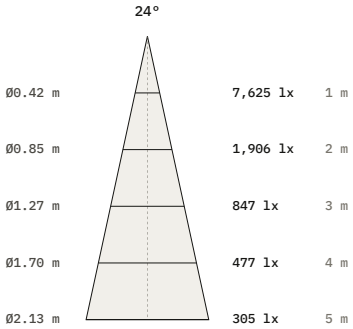

Luminous flux	1,500 lm
Efficacy	75 lm/W
Peak intensity	7,625 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	230 × 28 mm
Data	Estimated from catalogue data

RE-MINI-10, 20 W, 30° beam

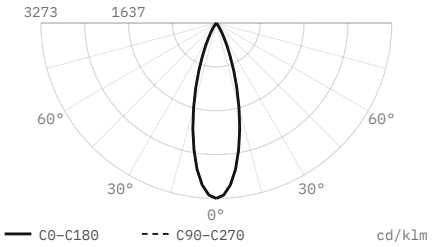

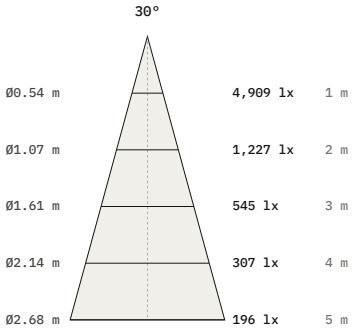

Luminous flux	1,500 lm
Efficacy	75 lm/W
Peak intensity	4,909 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	230 × 28 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.