Floor Lamps

Mobile ML0004

Floor lamp



Floor lamp. 20 W. 75° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
20 W	230 V AC	2 × 1040 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	75°
IP rating	**Certifications**	**Mounting**
IP20	CE	Floor

Finishes

White


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
ML0004	20 W	230 V AC	2 × 1040 lm	97 CRI	H1248 mm; two heads Ø90 × 35, span 260 mm; base Ø200 × 10 mm	75°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0004, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

ML0004, 20 W, 75° beam

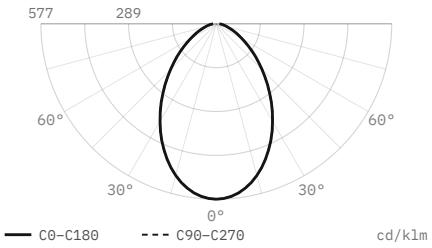

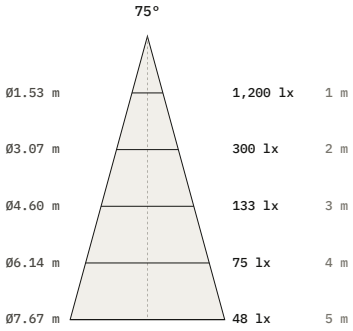

Luminous flux	**2,080 lm**
Efficacy	**104 lm/W**
Peak intensity	**1,200 cd, 577 cd/klm**
Beam angle (50%)	**75°**
Field angle (10%)	**136.7°**
Cut-off angle (2.5%)	**86.5°**
Flux 0–30° / 30–60° / 60–90°	**39.3 / 47.8 / 12.9 %**
Size	**1248 × 0 × 1248 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.