Floor Lamps

Mobile ML0012

Floor lamp




Floor lamp. 11 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
11 W	230 V AC	720 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	15°, 24°, 36°, 50°
IP rating	**Certifications**	**Mounting**
IP20	CE	Floor
Finishes		
Black		

Dimensions

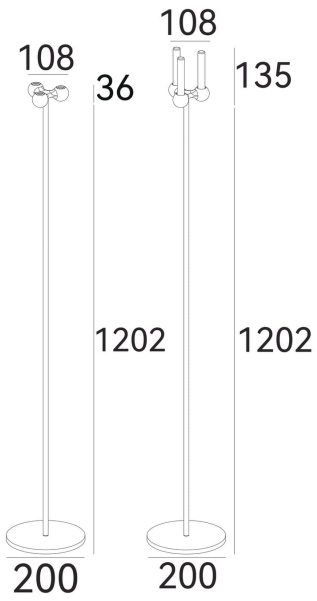


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
ML0012	11 W	230 V AC	720 lm	97 CRI	Ø200 x H1202 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0012, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


ML0012, 11 W, 15° beam

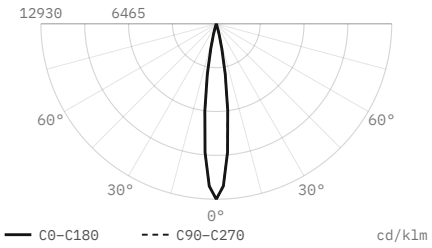


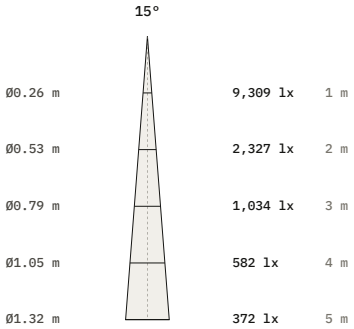

Luminous flux	720 lm
Efficacy	65 lm/W
Peak intensity	9,309 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø200 × 1202 mm
Data	Calculated from catalogue data


ML0012, 11 W, 24° beam

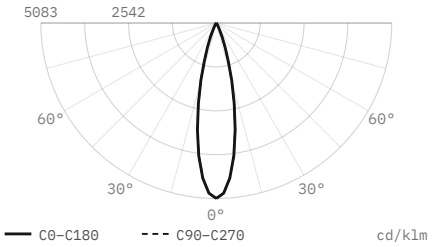


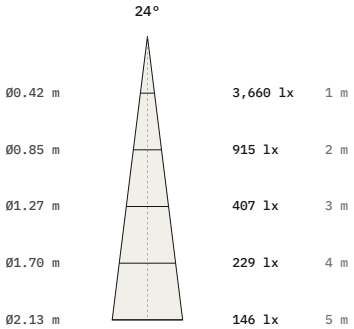

Luminous flux	720 lm
Efficacy	65 lm/W
Peak intensity	3,660 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø200 × 1202 mm
Data	Calculated from catalogue data


ML0012, 11 W, 36° beam

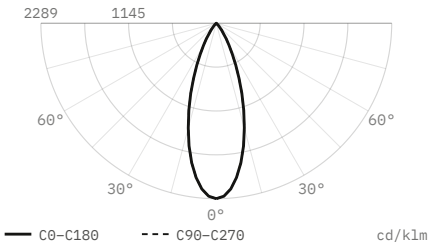


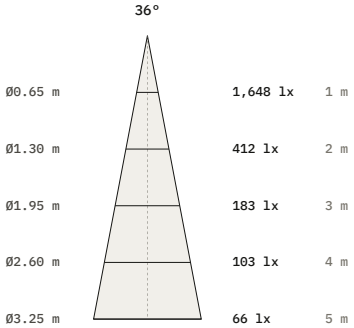

Luminous flux	720 lm
Efficacy	65 lm/W
Peak intensity	1,648 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø200 × 1202 mm
Data	Calculated from catalogue data

ML0012, 11 W, 50° beam

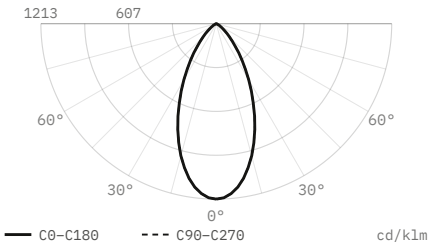

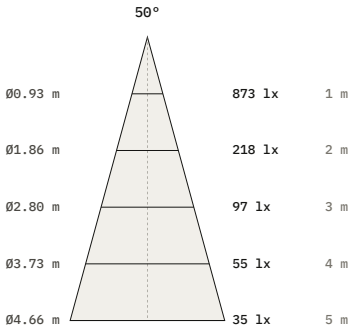

Luminous flux	**720 lm**
Efficacy	**65 lm/W**
Peak intensity	**873 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**Ø200 × 1202 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.