Floor Lamps

Mobile ML0013

Floor lamp



Floor lamp. 10 W. 50° beam. 2700, 3000, 4000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Luminous flux
10 W	230 V AC	960 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	50°
IP rating	**Certifications**	**Mounting**
IP20	CE	Floor

Finishes

White

Dimensions

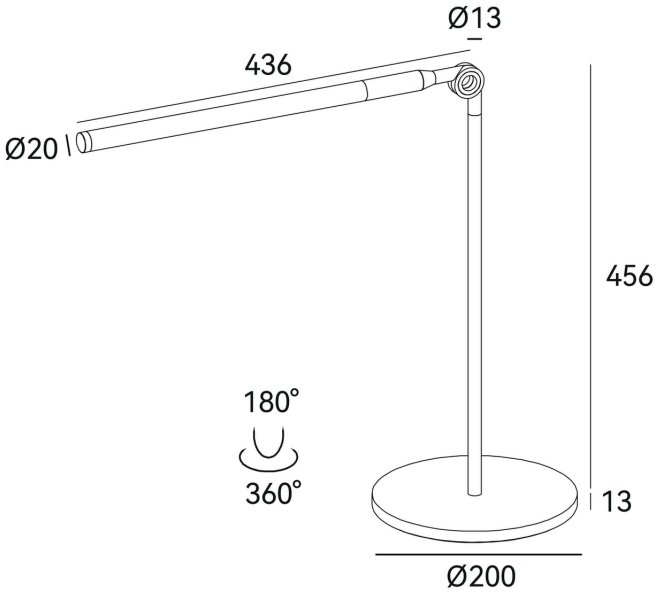


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
ML0013	10 W	230 V AC	960 lm	97 CRI	Ø200 x H456 mm	50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0013, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

ML0013, 10 W, 50° beam

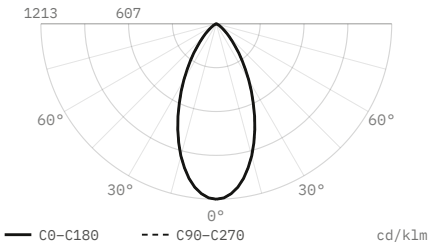

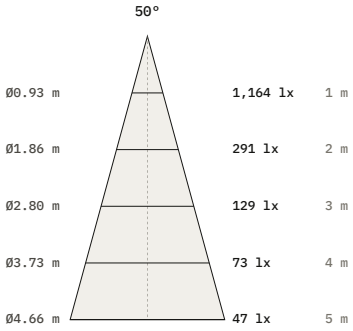

Luminous flux	**960 lm**
Efficacy	**96 lm/W**
Peak intensity	**1,164 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**Ø200 × 456 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.