Floor Lamps

# Mobile ML0021

Floor lamp




Floor lamp. 7 W. 97 CRI.

- LED source: Citizen

| Power | Voltage | Luminous flux |
|---|---|---|
| 7 W | 230 V AC | 250 lm |
| **CRI** | **IP rating** | **Certifications** |
| 97 CRI | IP20 | CE |
| **Mounting** | **Finishes** | |
| Floor | White | |

## Dimensions

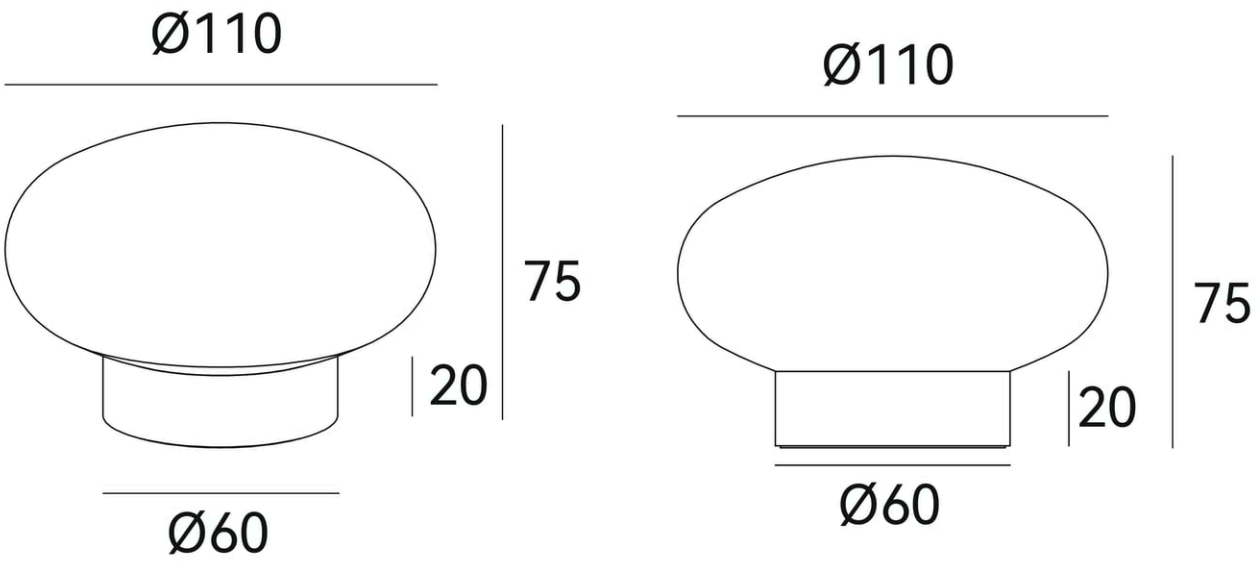



## Models


| Code | Power | Voltage | Flux | CRI | Size |
|---|---|---|---|---|---|
| **ML0021** | 7 W | 230 V AC | 250 lm | 97 CRI | Ø110 x H75 mm |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0021, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## ML0021, 7 W, wide distribution

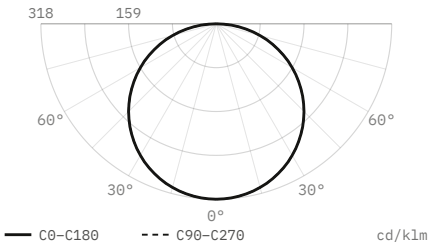

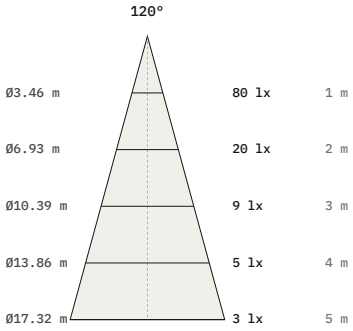
| | |
|---|---|
| Luminous flux | **250 lm** |
| Efficacy | **36 lm/W** |
| Peak intensity | **80 cd, 318 cd/klm** |
| Beam angle (50%) | **120°** |
| Field angle (10%) | **168.5°** |
| Cut-off angle (2.5%) | **88.5°** |
| Flux 0–30° / 30–60° / 60–90° | **25 / 50 / 25 %** |
| Size | **Ø110 × 75 mm** |
| Data | **Calculated from catalogue data** |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.