
Floor Lamps

# Mobile ML0024

Floor lamp

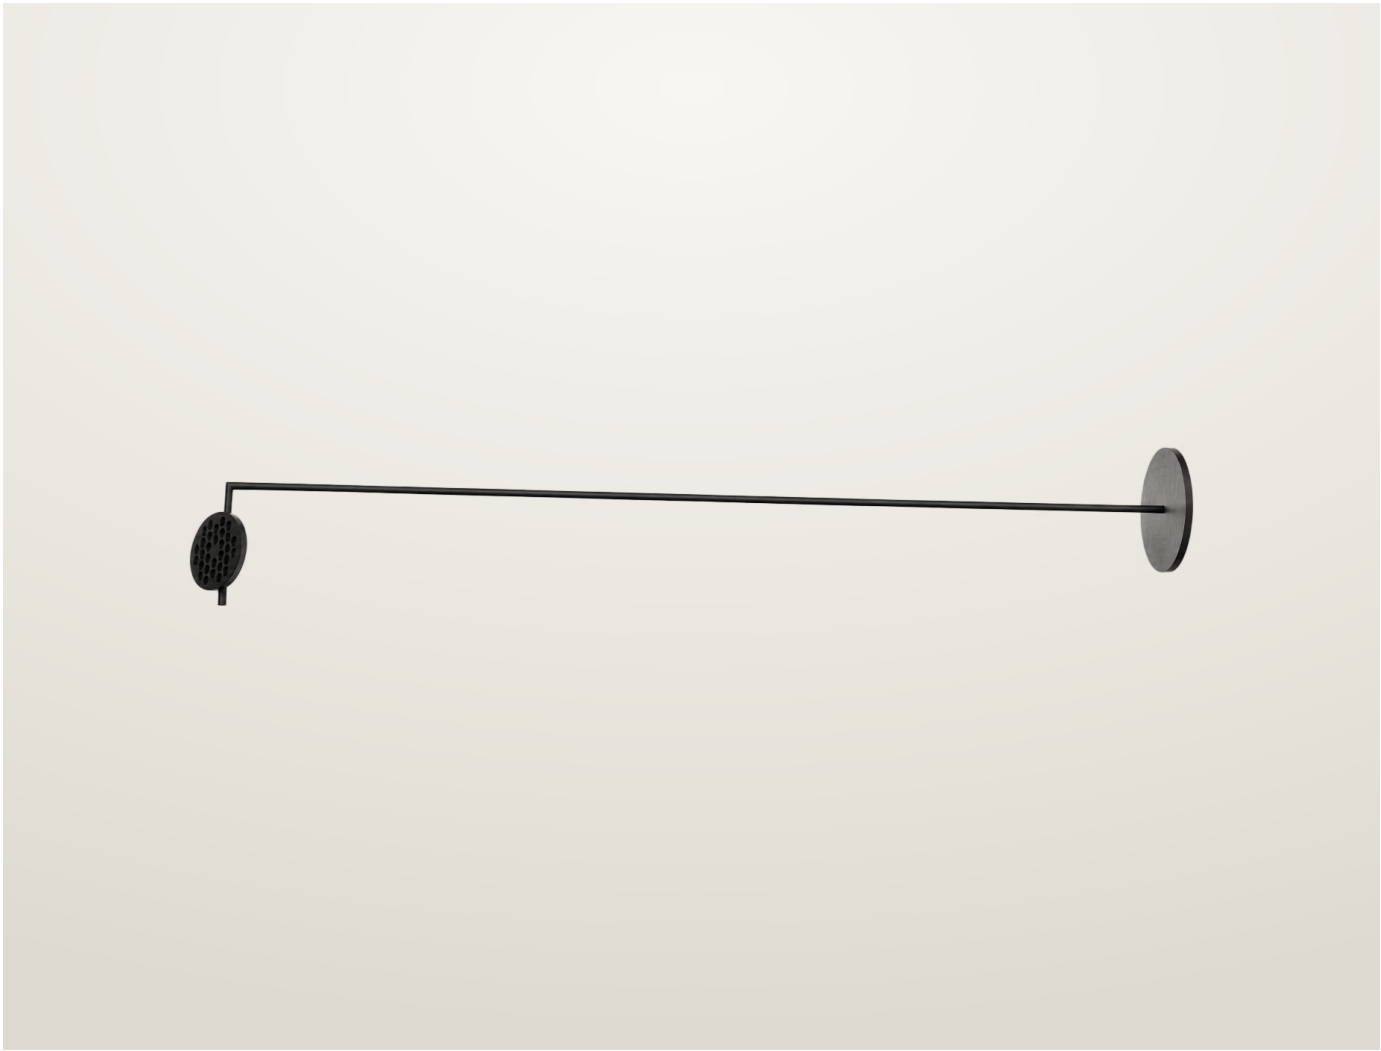


Floor lamp. 10 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**10 W** | Voltage<br>**230 V AC** | Luminous flux<br>**1443 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | Beam angles<br>**15°, 24°, 36°, 50°** |
| IP rating<br>**IP20** | Certifications<br>**CE** | Mounting<br>**Floor** |
| Finishes<br>**Black** | | |

## Dimensions

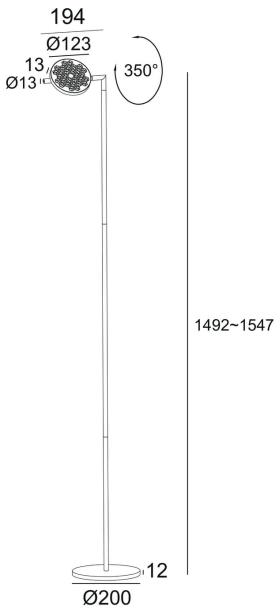



## Models


| Code | Power | Voltage | Flux | CRI | Size | Beam |
|---|---|---|---|---|---|---|
| **ML0024** | 10 W | 230 V AC | 1443 lm | 97 CRI | Ø200 x H1492~1547 mm | 15° 24° 36° 50° |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0024, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


## ML0024, 10 W, 15° beam

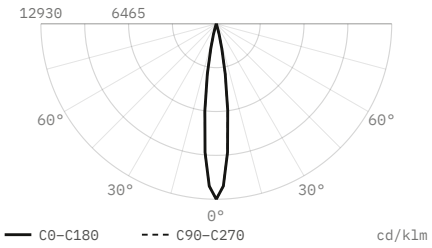


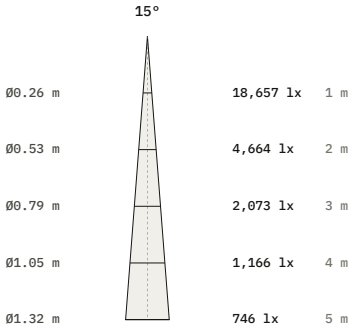
| | |
|---|---|
| Luminous flux | 1,443 lm |
| Efficacy | 144 lm/W |
| Peak intensity | 18,657 cd, 12,930 cd/klm |
| Beam angle (50%) | 15° |
| Field angle (10%) | 27.3° |
| Cut-off angle (2.5%) | 17° |
| Flux 0–30° / 30–60° / 60–90° | 100 / 0 / 0 % |
| Size | Ø200 × 1492 mm |
| Data | Calculated from catalogue data |


## ML0024, 10 W, 24° beam

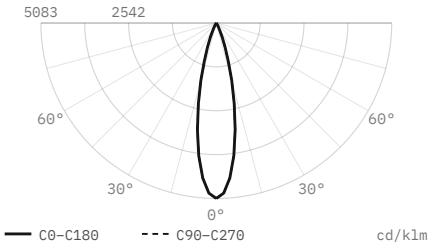



| | |
|---|---|
| Luminous flux | 1,443 lm |
| Efficacy | 144 lm/W |
| Peak intensity | 7,335 cd, 5,083 cd/klm |
| Beam angle (50%) | 24° |
| Field angle (10%) | 43.7° |
| Cut-off angle (2.5%) | 27.5° |
| Flux 0–30° / 30–60° / 60–90° | 98.7 / 1.3 / 0 % |
| Size | Ø200 × 1492 mm |
| Data | Calculated from catalogue data |

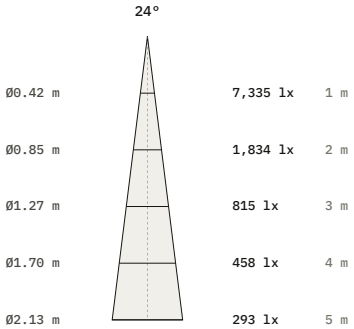
## ML0024, 10 W, 36° beam

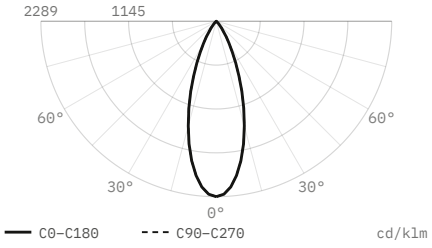



| | |
|---|---|
| Luminous flux | 1,443 lm |
| Efficacy | 144 lm/W |
| Peak intensity | 3,303 cd, 2,289 cd/klm |
| Beam angle (50%) | 36° |
| Field angle (10%) | 65.6° |
| Cut-off angle (2.5%) | 41.5° |
| Flux 0–30° / 30–60° / 60–90° | 86.1 / 13.9 / 0 % |
| Size | Ø200 × 1492 mm |
| Data | Calculated from catalogue data |
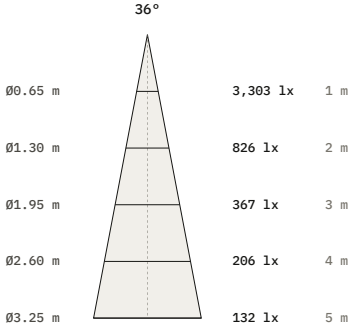
## ML0024, 10 W, 50° beam

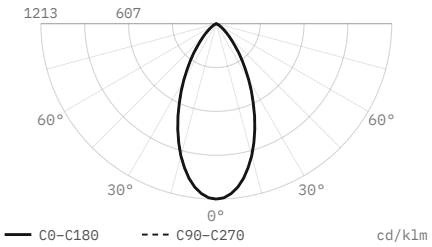


| | |
|---|---|
| Luminous flux | **1,443 lm** |
| Efficacy | **144 lm/W** |
| Peak intensity | **1,750 cd, 1,213 cd/klm** |
| Beam angle (50%) | **50°** |
| Field angle (10%) | **91.1°** |
| Cut-off angle (2.5%) | **57.5°** |
| Flux 0–30° / 30–60° / 60–90° | **64.8 / 33.6 / 1.5 %** |
| Size | **Ø200 × 1492 mm** |
| Data | **Calculated from catalogue data** |

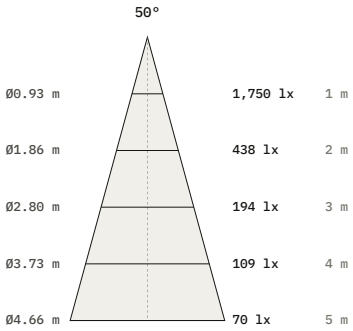DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.