
Downlights

Moon DL1026

Recessed spotlight

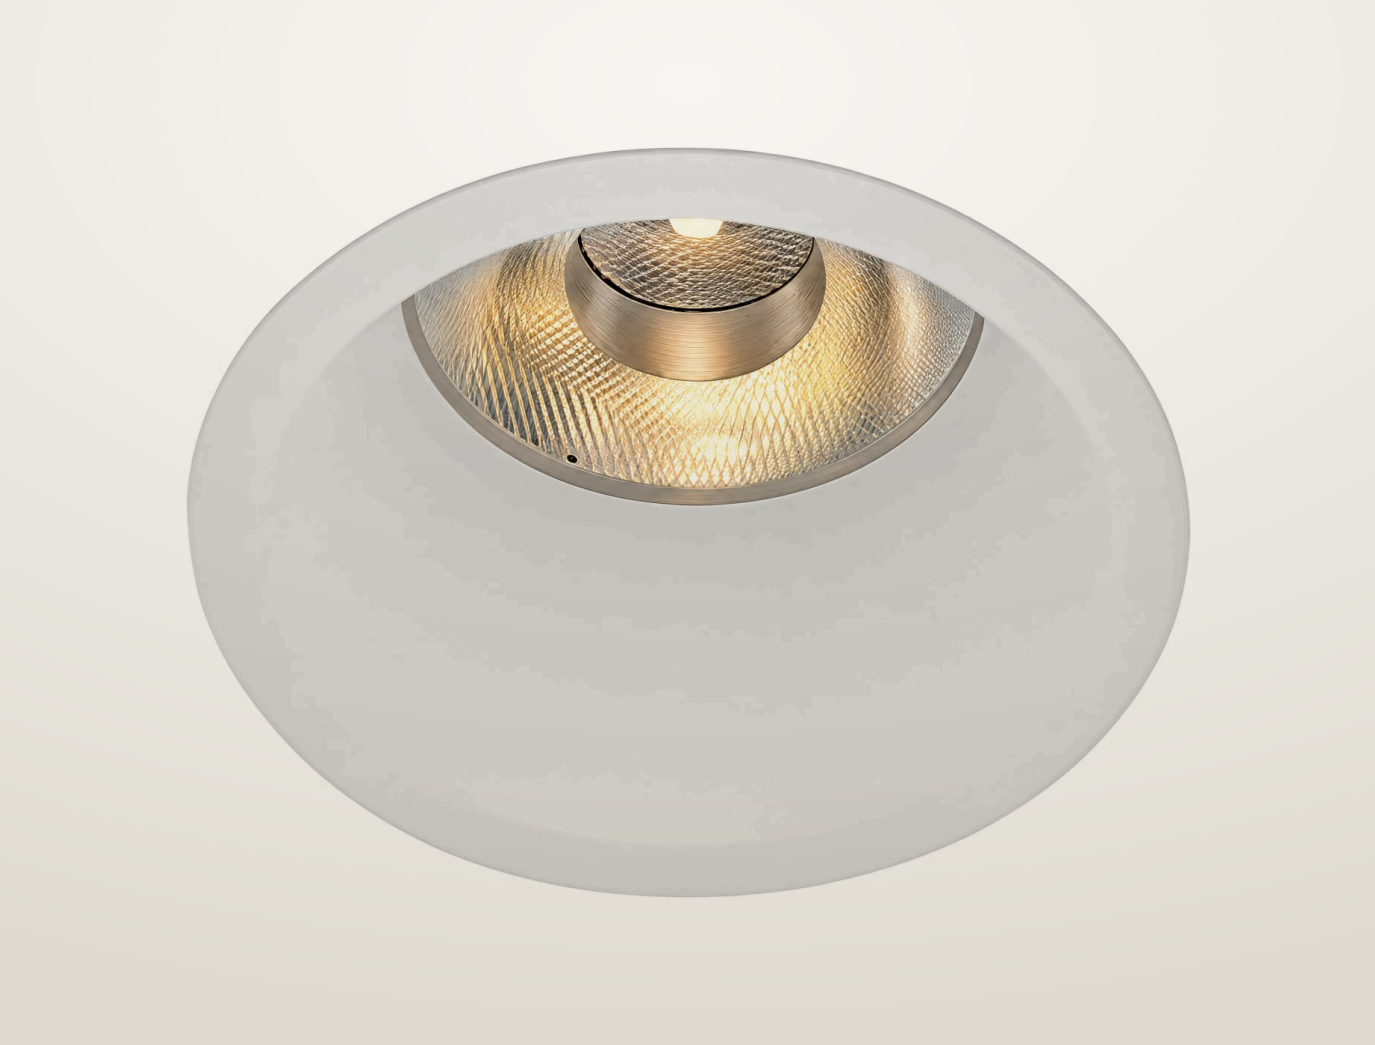


Recessed spotlight. 10 or 13 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø60 mm
- LED source: Citizen

Power **10 W, 13 W**	Voltage **max 19 V, max 37 V**	Luminous flux **960 lm, 1180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 55°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		

Dimensions

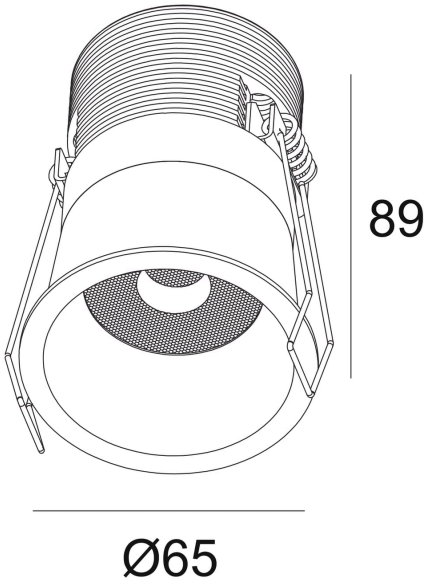


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1026	10 W	max 19 V	960 lm	97 CRI	Ø65 x H89 mm	Ø60 mm	15° 24° 36° 55°	500 mA
DL1369	13 W	max 37 V	1180 lm	97 CRI	Ø65 x H89 mm	Ø60 mm	15° 24° 36° 55°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1026, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.


DL1026, 9 W, 3000 K, 55° beam, measured

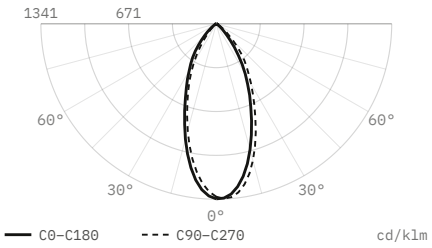


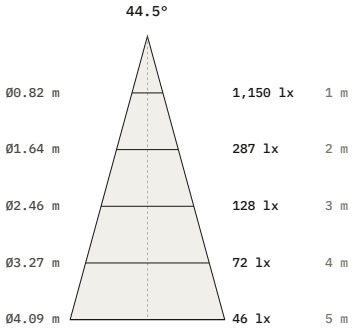

Luminous flux	859 lm
Efficacy	95 lm/W
Peak intensity	1,152 cd, 1,341 cd/klm
Beam angle (50%)	44.5°
Field angle (10%)	86.4°
Cut-off angle (2.5%)	58°
Flux 0–30° / 30–60° / 60–90°	66.3 / 31.6 / 2 %
Size	Ø65 × 89 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 13 October 2025


DL1026, 10 W, 15° beam

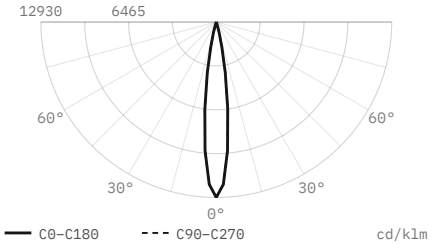


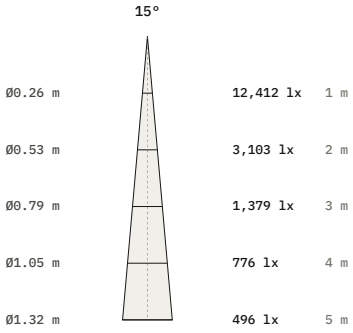

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	12,412 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø65 × 89 mm
Data	Calculated from catalogue data


DL1026, 10 W, 24° beam

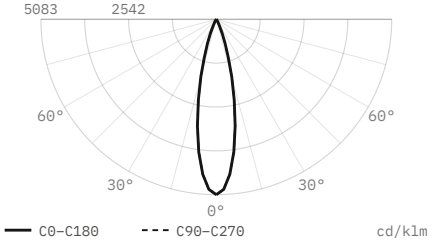


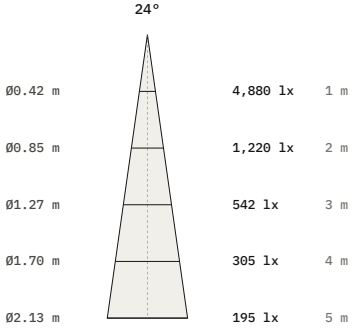

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	4,880 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø65 × 89 mm
Data	Calculated from catalogue data

DL1026, 10 W, 36° beam

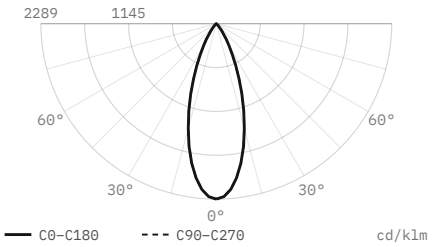

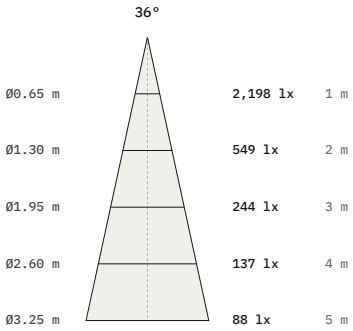

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	2,198 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø65 × 89 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.