Downlights

Moon DL1175

Recessed spotlight





Recessed spotlight. 10 or 13 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø75 mm
- LED source: Citizen

Power **10 W, 13 W**	Voltage **max 19 V, max 37 V**	Luminous flux **960 lm, 1180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 55°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		

Dimensions

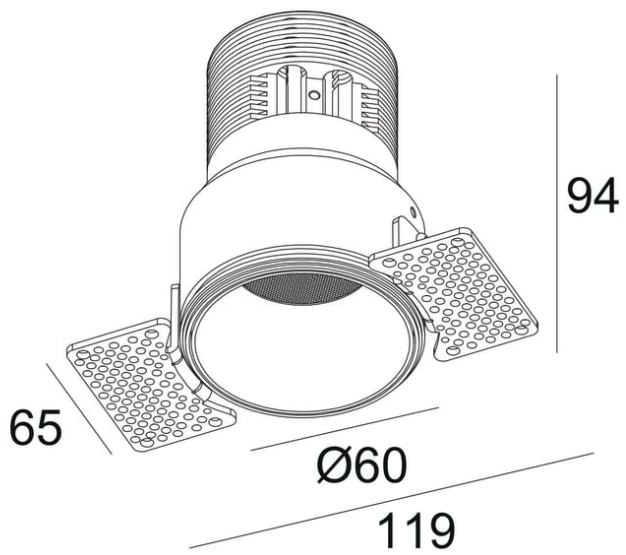

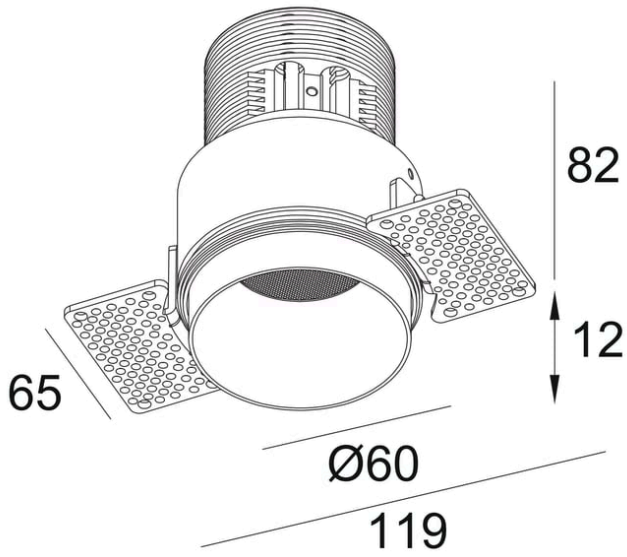


Models


Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1175	Trimless	10 W	max 19 V	960 lm	97 CRI	Ø60 x H94 mm	Ø75 mm	15° 24° 36° 55°	500 mA
DL1371	Trimless	13 W	max 37 V	1180 lm	97 CRI	Ø60 x H94 mm	Ø75 mm	15° 24° 36° 55°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1371, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1371, 13 W, 15° beam

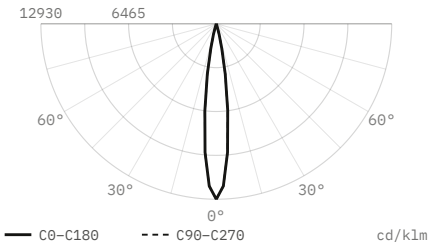


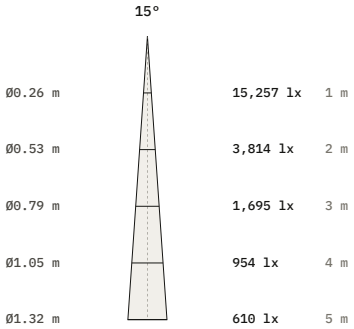

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	15,257 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø60 × 94 mm
Data	Calculated from catalogue data


DL1371, 13 W, 24° beam

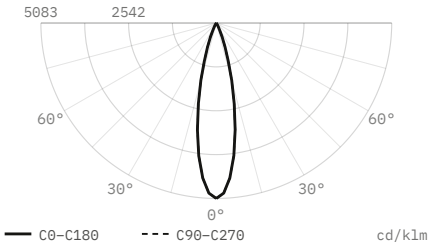


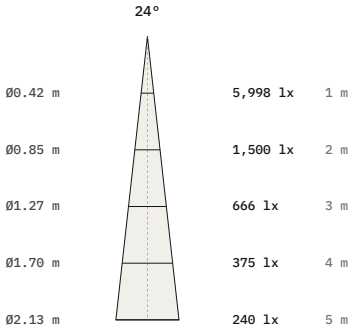

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø60 × 94 mm
Data	Calculated from catalogue data


DL1371, 13 W, 36° beam

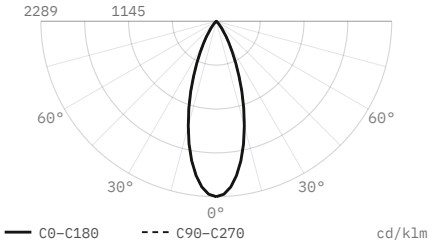


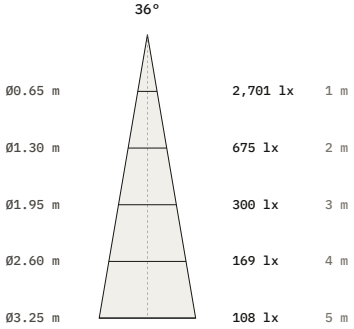

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø60 × 94 mm
Data	Calculated from catalogue data

DL1371, 13 W, 55° beam

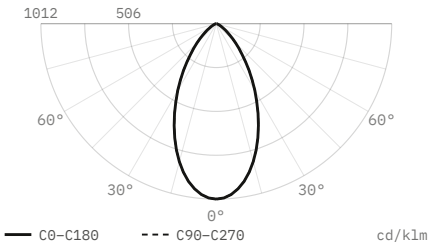

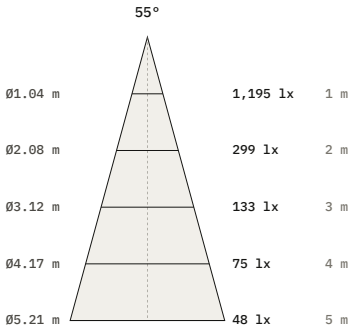

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,195 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	Ø60 × 94 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.