Wall Lamps

Oval Indoor WL0061

Wall light




Wall light. 3 W. Three beam angles, 20° to 60°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **3 W**	Voltage **220 V AC**	Luminous flux **180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **20°, 40°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface, Wall**
Finishes **Black**		

Dimensions

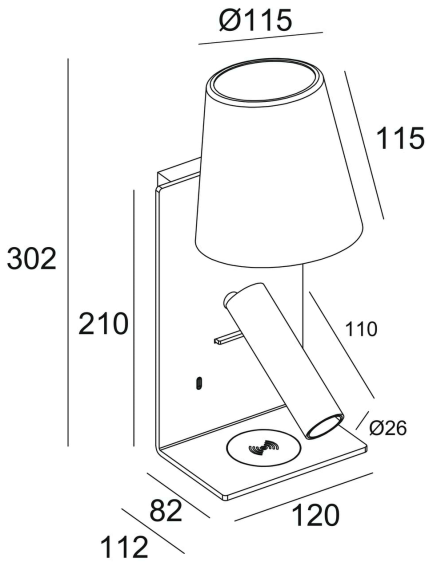


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
WL0061	3 W	220 V AC	180 lm	97 CRI	302, 210, Ø115, 115, 120, 112, 82, 110, Ø26 mm	20° 40° 60°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0061, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


WL0061, 3 W, 20° beam

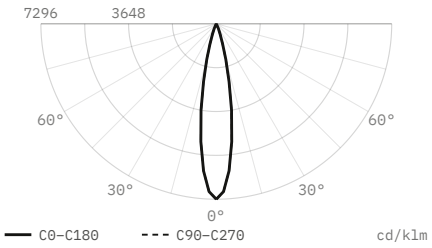


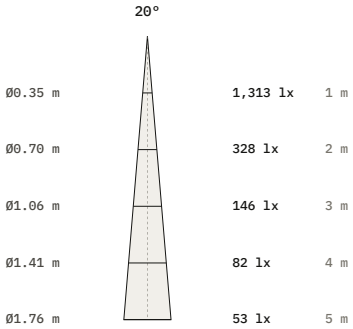

Luminous flux	180 lm
Efficacy	60 lm/W
Peak intensity	1,313 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø115 × 302 mm
Data	Calculated from catalogue data


WL0061, 3 W, 40° beam

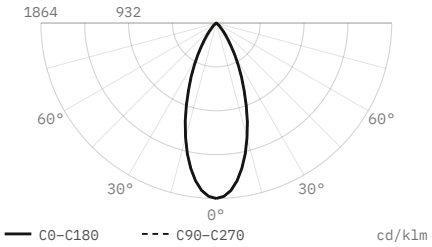


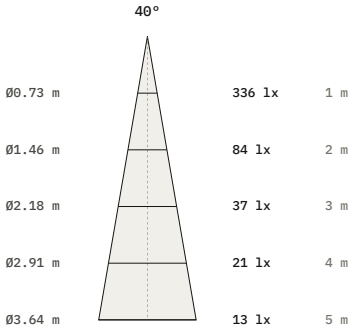

Luminous flux	180 lm
Efficacy	60 lm/W
Peak intensity	336 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	Ø115 × 302 mm
Data	Calculated from catalogue data

WL0061, 3 W, 60° beam

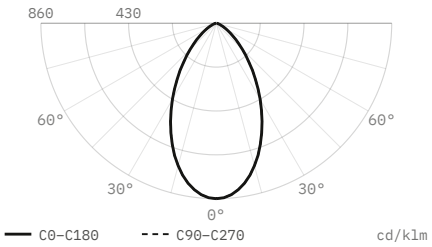

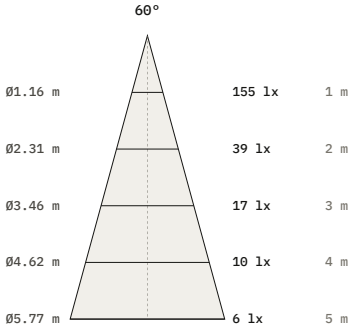

Luminous flux	180 lm
Efficacy	60 lm/W
Peak intensity	155 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø115 × 302 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.