Wall Lamps

Oval Indoor WL0063

Wall light




Wall light. 3 W. Three beam angles, 20° to 60°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **3 W**	Voltage **220 V AC**	Luminous flux **280 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **20°, 40°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface, Wall**
Finishes **Black**		

Dimensions

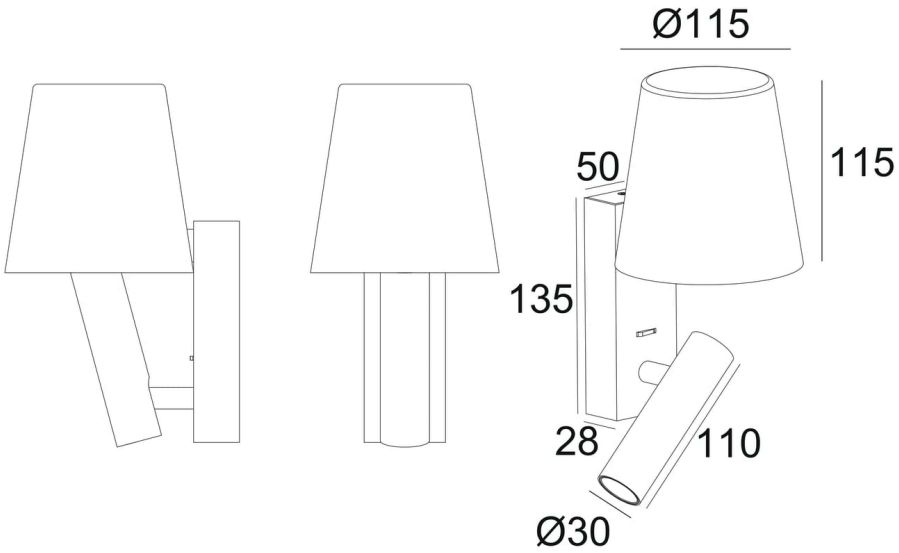


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
WL0063	3 W	220 V AC	280 lm	97 CRI	Ø115, 115, 50, 135, 28, 110, Ø30 mm	20° 40° 60°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0063, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


WL0063, 3 W, 20° beam

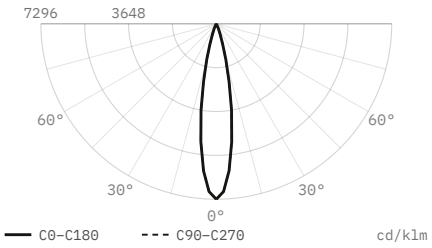


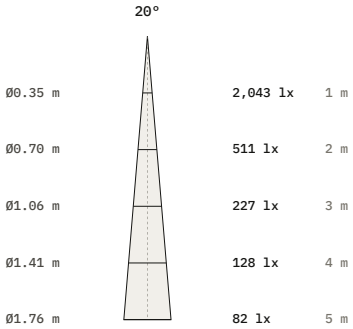

Luminous flux	280 lm
Efficacy	93 lm/W
Peak intensity	2,043 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø115 × 50 mm
Data	Calculated from catalogue data


WL0063, 3 W, 40° beam

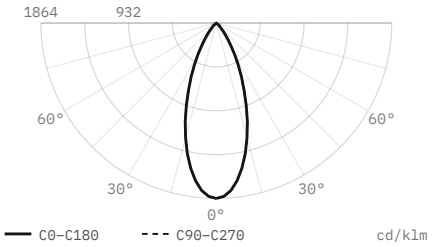


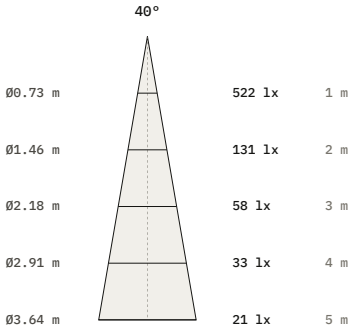

Luminous flux	280 lm
Efficacy	93 lm/W
Peak intensity	522 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	Ø115 × 50 mm
Data	Calculated from catalogue data

WL0063, 3 W, 60° beam

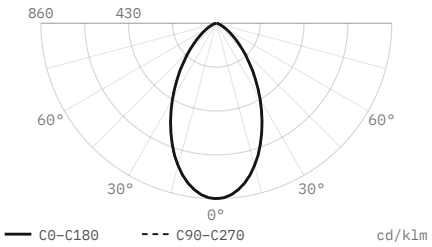

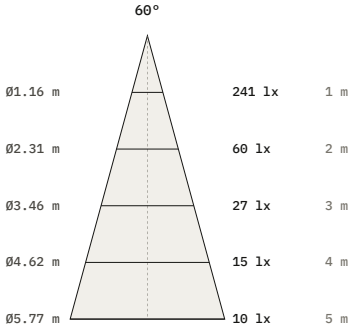

Luminous flux	280 lm
Efficacy	93 lm/W
Peak intensity	241 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø115 × 50 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.