Wall Lamps

Oval Indoor WL0104

Wall light




Wall light. 8 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **8 W**	Voltage **230 V AC**	Luminous flux **400 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface, Wall**
Finishes **Black**		

Dimensions

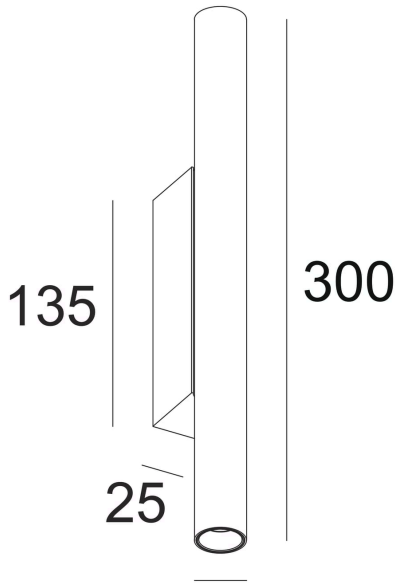


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
WL0104	8 W	230 V AC	400 lm	97 CRI	135, 300, 25, Ø26 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0104, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


WL0104, 8 W, 15° beam

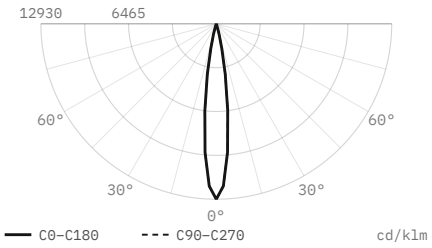


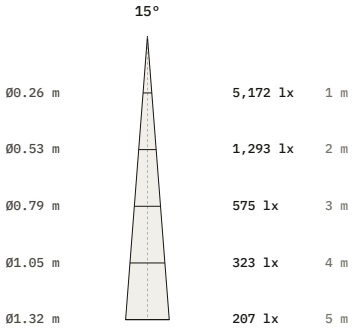

Luminous flux	400 lm
Efficacy	50 lm/W
Peak intensity	5,172 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data


WL0104, 8 W, 24° beam

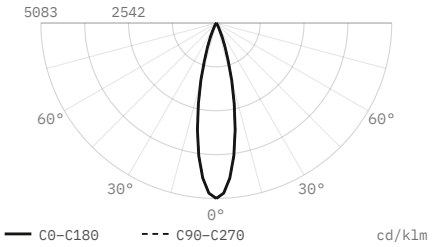


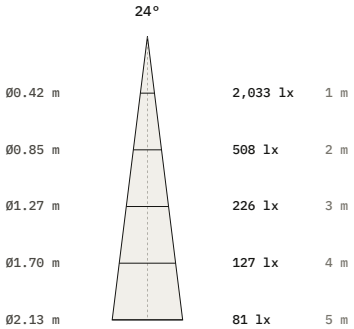

Luminous flux	400 lm
Efficacy	50 lm/W
Peak intensity	2,033 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data


WL0104, 8 W, 36° beam

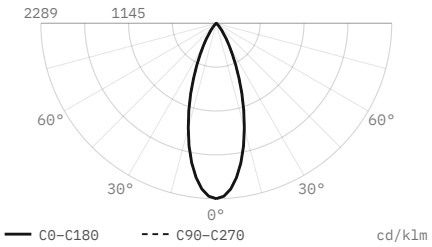


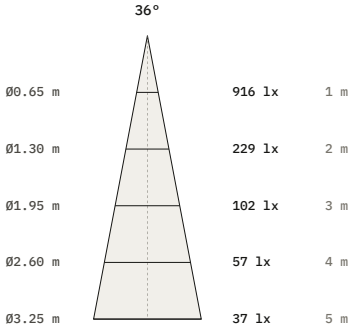

Luminous flux	400 lm
Efficacy	50 lm/W
Peak intensity	916 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data

WL0104, 8 W, 50° beam

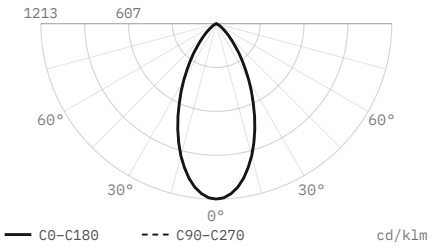

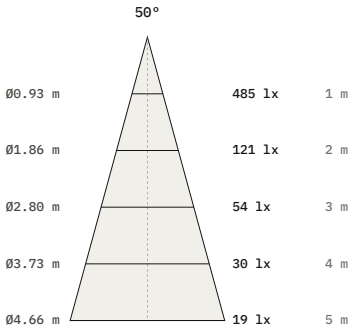

Luminous flux	400 lm
Efficacy	50 lm/W
Peak intensity	485 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.