Wall Lamps

Oval Indoor WL0113

Wall light




Wall light. 10 W. Three beam angles, 20° to 60°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **10 W**	Voltage **220 V DC**	Luminous flux **960 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **20°, 40°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface, Wall**
Finishes **Black**		

Dimensions

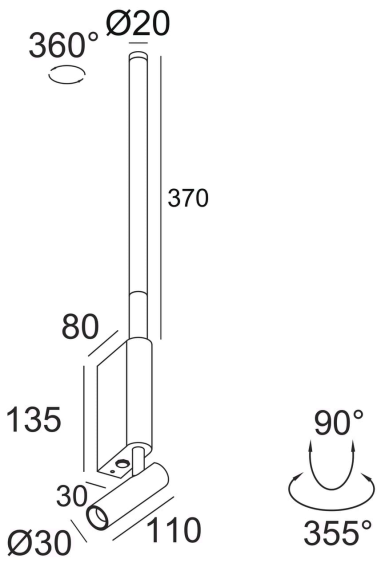


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
WL0113	10 W	220 V DC	960 lm	97 CRI	370 × Ø20 mm tube; back plate 135 × 80 × 30 mm; reading spot Ø30 × 110 mm	20° 40° 60°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0113, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


WL0113, 10 W, 20° beam

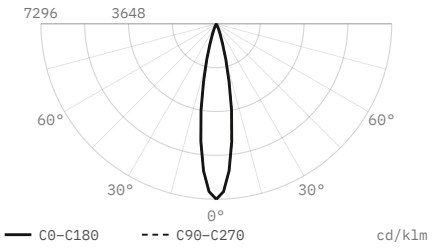


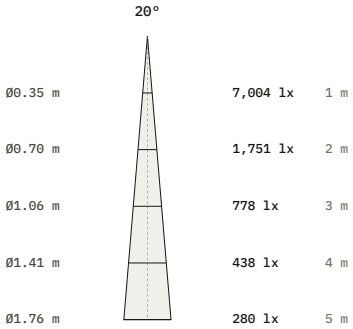

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	7,004 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø20 × 370 mm
Data	Calculated from catalogue data


WL0113, 10 W, 40° beam

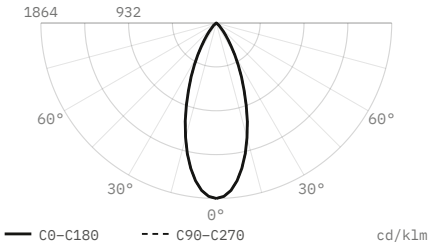


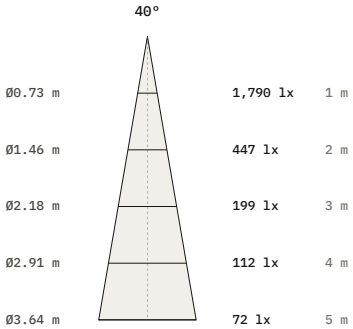

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	1,790 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	Ø20 × 370 mm
Data	Calculated from catalogue data

WL0113, 10 W, 60° beam

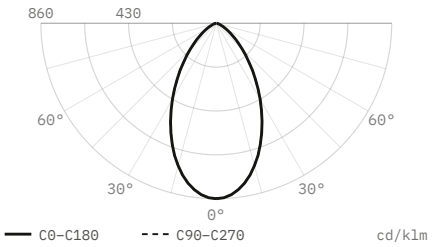

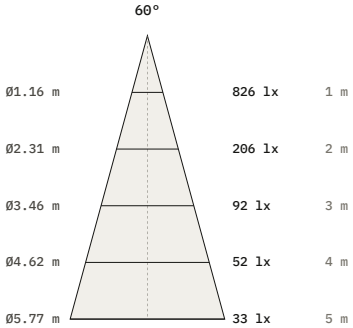

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	826 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø20 × 370 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.