Wall Lamps

Oval Indoor WL0125

Wall light




Wall light. 3 W. Three beam angles, 20° to 60°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **3 W**	Voltage **230 V AC**	Luminous flux **130 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **20°, 40°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface, Wall**
Finishes **Black**		

Dimensions

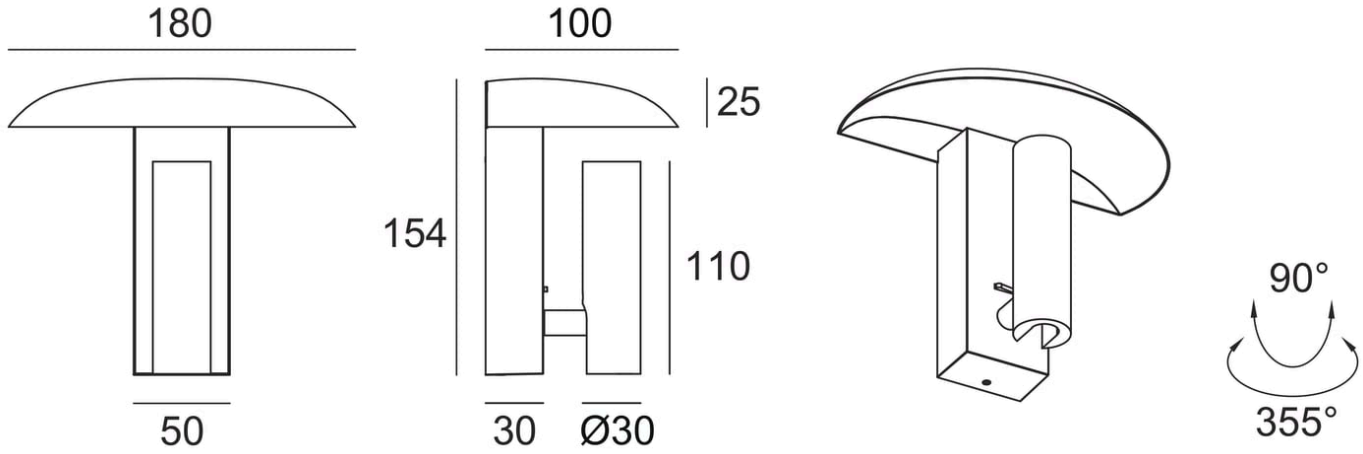


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
WL0125	3 W	230 V AC	130 lm	97 CRI	180, 100, 25, 154, 110, 50, 30, Ø30 mm	20° 40° 60°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0125, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.


WL0125, 3.3 W, 3000 K, 40° beam, measured

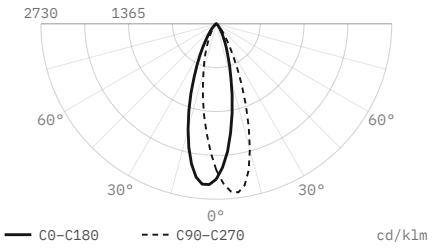


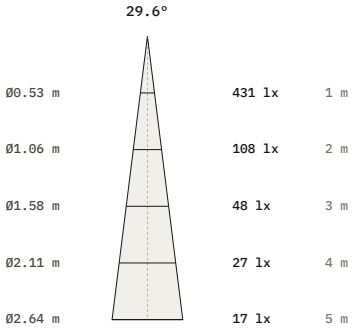

Luminous flux	178 lm
Efficacy	54 lm/W
Peak intensity	486 cd, 2,730 cd/klm
Beam angle (50%)	29.6°
Field angle (10%)	60.8°
Cut-off angle (2.5%)	48°
Flux 0–30° / 30–60° / 60–90°	82.1 / 17.2 / 0.7 %
Size	Ø30 × 180 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 7 November 2025


WL0125, 3 W, 20° beam

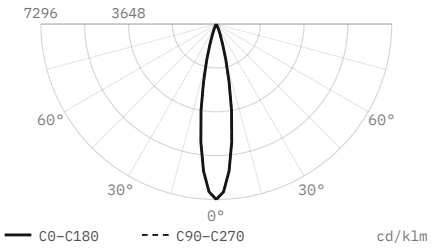


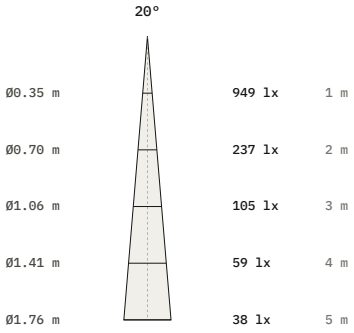

Luminous flux	130 lm
Efficacy	43 lm/W
Peak intensity	949 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø30 × 180 mm
Data	Calculated from catalogue data

WL0125, 3 W, 60° beam

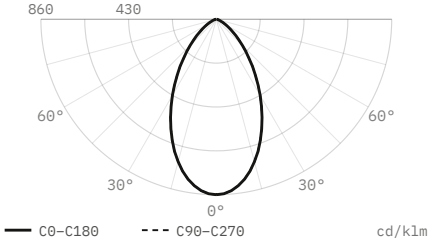

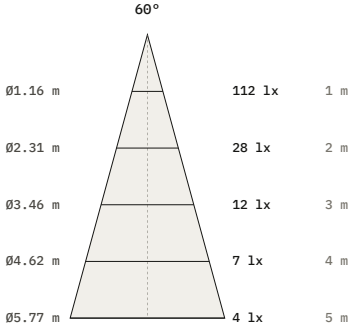

Luminous flux	130 lm
Efficacy	43 lm/W
Peak intensity	112 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø30 × 180 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.