Wall Lamps

# Oval Indoor WL0128

Wall light




Wall light. 7 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**7 W** | Voltage<br>**230 V AC** | Luminous flux<br>**640 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | Beam angles<br>**15°, 24°, 36°, 50°** |
| IP rating<br>**IP20** | Certifications<br>**CE** | Mounting<br>**Surface, Suspended, Wall** |
| Finishes<br>**Black** | | |

## Dimensions

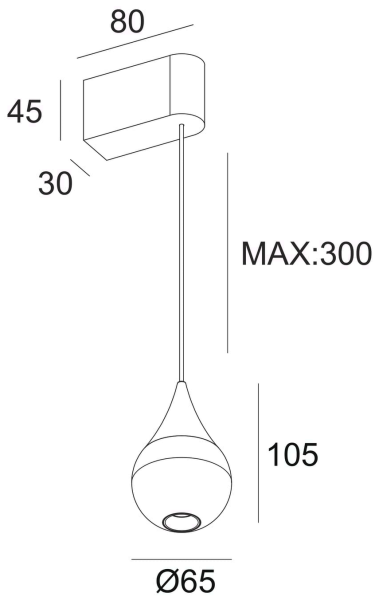



## Models


| Code | Power | Voltage | Flux | CRI | Size | Beam |
|---|---|---|---|---|---|---|
| **WL0128** | 7 W | 230 V AC | 640 lm | 97 CRI | 80, 45, 30, MAX:300, 105, Ø65 mm | 15° 24° 36° 50° |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0128, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


## WL0128, 7 W, 15° beam

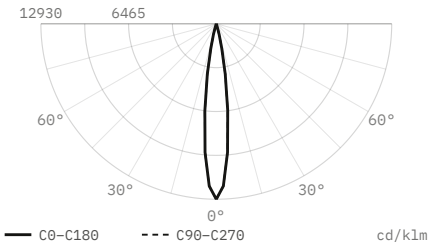


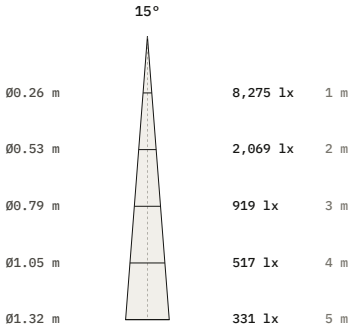
| | |
|---|---|
| Luminous flux | 640 lm |
| Efficacy | 91 lm/W |
| Peak intensity | 8,275 cd, 12,930 cd/klm |
| Beam angle (50%) | 15° |
| Field angle (10%) | 27.3° |
| Cut-off angle (2.5%) | 17° |
| Flux 0–30° / 30–60° / 60–90° | 100 / 0 / 0 % |
| Size | Ø65 × 80 mm |
| Data | Calculated from catalogue data |


## WL0128, 7 W, 24° beam

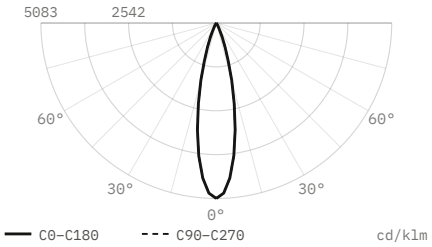



| | |
|---|---|
| Luminous flux | 640 lm |
| Efficacy | 91 lm/W |
| Peak intensity | 3,253 cd, 5,083 cd/klm |
| Beam angle (50%) | 24° |
| Field angle (10%) | 43.7° |
| Cut-off angle (2.5%) | 27.5° |
| Flux 0–30° / 30–60° / 60–90° | 98.7 / 1.3 / 0 % |
| Size | Ø65 × 80 mm |
| Data | Calculated from catalogue data |

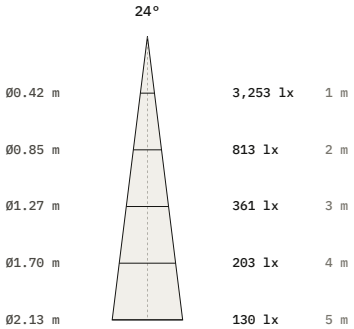
## WL0128, 7 W, 36° beam

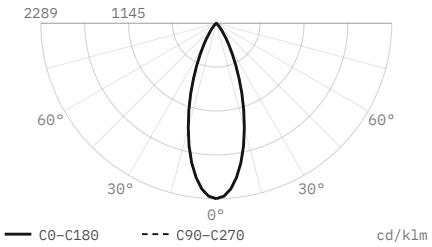



| | |
|---|---|
| Luminous flux | 640 lm |
| Efficacy | 91 lm/W |
| Peak intensity | 1,465 cd, 2,289 cd/klm |
| Beam angle (50%) | 36° |
| Field angle (10%) | 65.6° |
| Cut-off angle (2.5%) | 41.5° |
| Flux 0–30° / 30–60° / 60–90° | 86.1 / 13.9 / 0 % |
| Size | Ø65 × 80 mm |
| Data | Calculated from catalogue data |
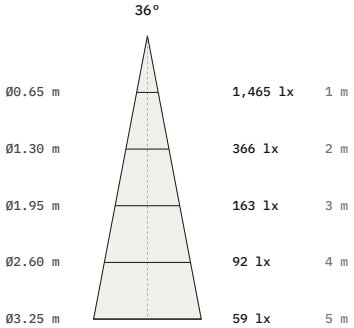
## WL0128, 7 W, 50° beam

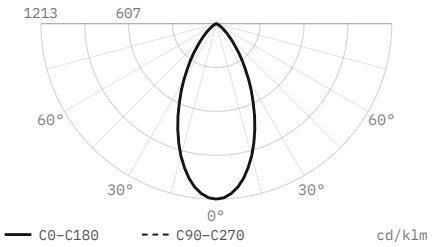


| | |
|---|---|
| Luminous flux | 640 lm |
| Efficacy | 91 lm/W |
| Peak intensity | 776 cd, 1,213 cd/klm |
| Beam angle (50%) | 50° |
| Field angle (10%) | 91.1° |
| Cut-off angle (2.5%) | 57.5° |
| Flux 0–30° / 30–60° / 60–90° | 64.8 / 33.6 / 1.5 % |
| Size | Ø65 × 80 mm |
| Data | Calculated from catalogue data |

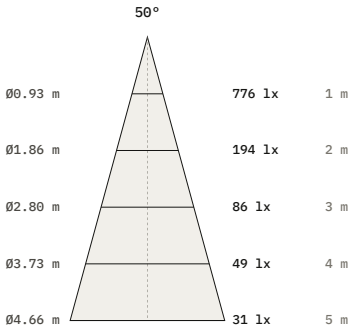DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.