Wall Lamps

# Oval Indoor WL0131

Wall light




Wall light. 3 W. Three beam angles, 20° to 60°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**3 W** | Voltage<br>**230 V AC** | Luminous flux<br>**450 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | Beam angles<br>**20°, 40°, 60°** |
| IP rating<br>**IP20** | Certifications<br>**CE** | Mounting<br>**Surface, Wall** |
| Finishes<br>**Black** | | |

## Dimensions

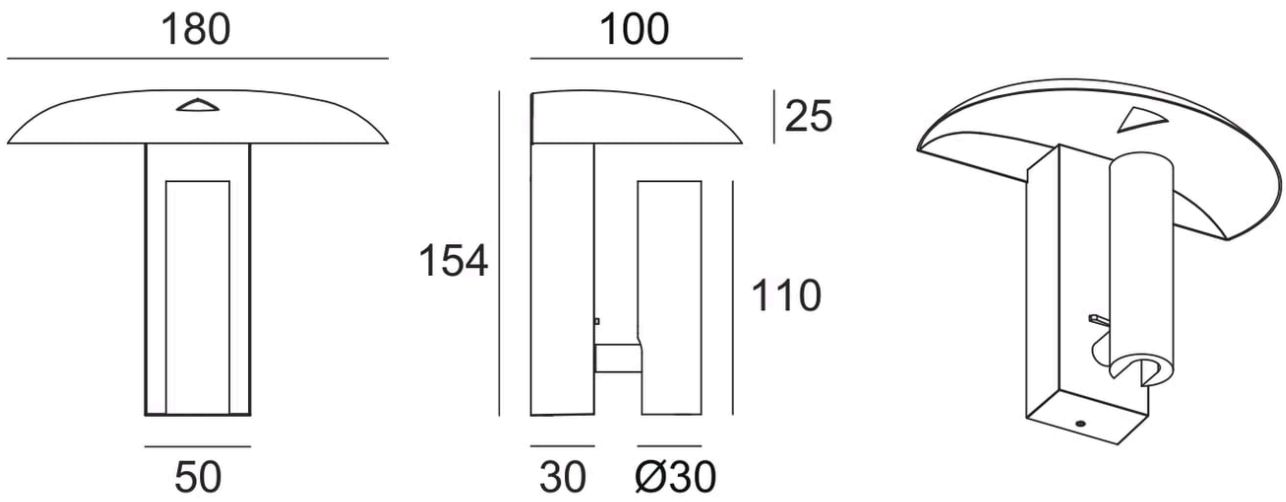



## Models


| Code | Power | Voltage | Flux | CRI | Size | Beam |
|---|---|---|---|---|---|---|
| **WL0131** | 3 W | 230 V AC | 450 lm | 97 CRI | 180, 100, 25, 154, 110, 50, 30, Ø30 mm | 20° 40° 60° |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0131, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


## WL0131, 3 W, 20° beam

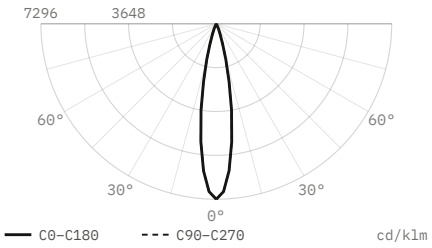


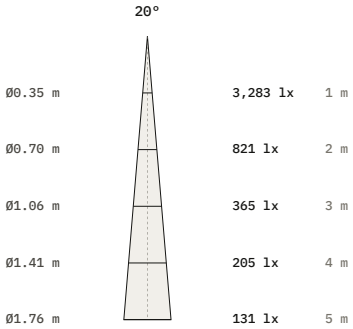
| | |
|---|---|
| Luminous flux | 450 lm |
| Efficacy | 150 lm/W |
| Peak intensity | 3,283 cd, 7,296 cd/klm |
| Beam angle (50%) | 20° |
| Field angle (10%) | 36.5° |
| Cut-off angle (2.5%) | 23° |
| Flux 0–30° / 30–60° / 60–90° | 99.8 / 0.2 / 0 % |
| Size | Ø30 × 180 mm |
| Data | Calculated from catalogue data |


## WL0131, 3 W, 40° beam

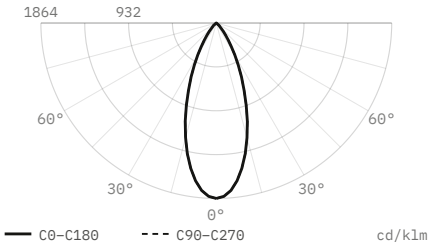



| | |
|---|---|
| Luminous flux | 450 lm |
| Efficacy | 150 lm/W |
| Peak intensity | 839 cd, 1,864 cd/klm |
| Beam angle (50%) | 40° |
| Field angle (10%) | 72.9° |
| Cut-off angle (2.5%) | 46° |
| Flux 0–30° / 30–60° / 60–90° | 79.9 / 19.9 / 0.2 % |
| Size | Ø30 × 180 mm |
| Data | Calculated from catalogue data |
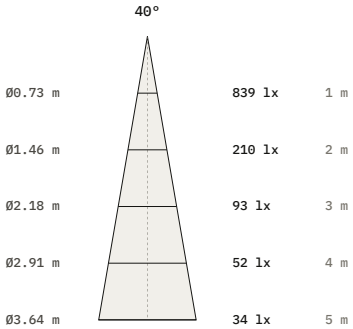
## WL0131, 3 W, 60° beam

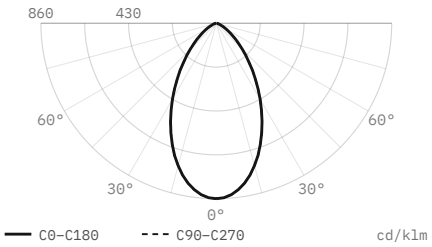


| | |
|---|---|
| Luminous flux | 450 lm |
| Efficacy | 150 lm/W |
| Peak intensity | 387 cd, 860 cd/klm |
| Beam angle (50%) | 60° |
| Field angle (10%) | 109.4° |
| Cut-off angle (2.5%) | 69° |
| Flux 0–30° / 30–60° / 60–90° | 52.4 / 42.6 / 5 % |
| Size | Ø30 × 180 mm |
| Data | Calculated from catalogue data |

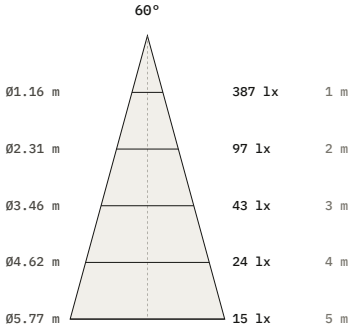DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.