Wall Lamps

Oval Indoor WL0151

Wall light




Wall light. 5 W. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
5 W	230 V AC	250 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Surface, Wall	Black

Dimensions

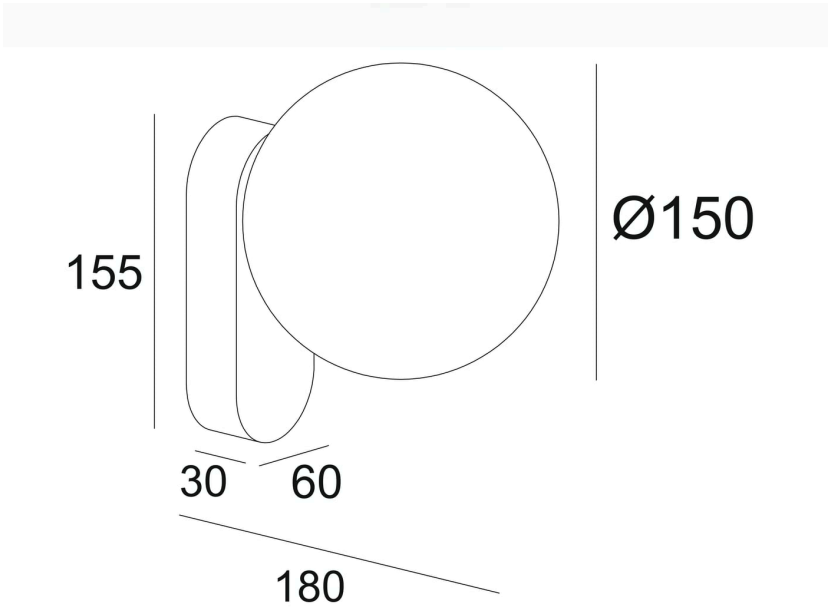


Models


Code	Power	Voltage	Flux	CRI	Size
WL0151	5 W	230 V AC	250 lm	97 CRI	Ø150 globe, 180 × 155 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0151, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0151, 5 W, wide distribution

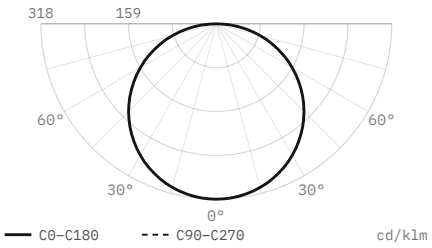

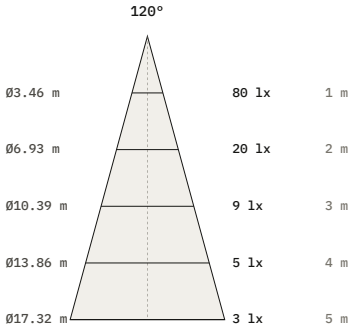

Luminous flux	**250 lm**
Efficacy	**50 lm/W**
Peak intensity	**80 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø150 × 180 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.