Wall Lamps

Oval Outdoor WL0152

Wall light



Wall light. 7 W. 2700, 3000, 4000 K. IP65. 97 CRI.

– LED source: Citizen

Power	Voltage	Luminous flux
7 W	24 V DC	630 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP65
Certifications	**Mounting**	**Finishes**
CE	Surface, Wall	Black


Models


Code	Power	Voltage	Flux	CRI	Size
WL0152	7 W	24 V DC	630 lm	97 CRI	Ø85 × 64 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0152, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0152, 7 W, wide distribution

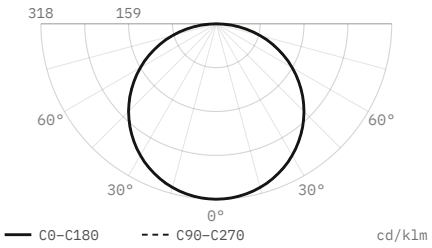

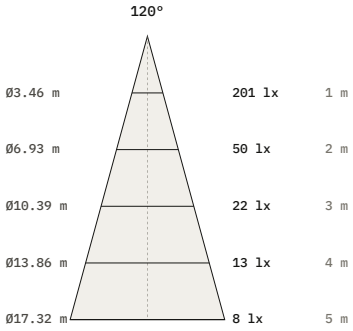

Luminous flux	630 lm
Efficacy	90 lm/W
Peak intensity	201 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø85 × 64 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.