Suspension

P3-4096

Pendant




Pendant. 35 W. Three beam angles, 18° to 36°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **35 W**	Luminous flux **2400–2600 lm**	Colour temperature **2700 K, 3000 K, 4000 K**
CRI **97 CRI**	Beam angles **18°, 24°, 36°**	IP rating **IP20**
Certifications **CE, RoHS, EMC, LVD**	Mounting **Suspended**	Control **DALI, 0-10V, Triac, Casambi**
Finishes **White, Black, Grey**		

Dimensions

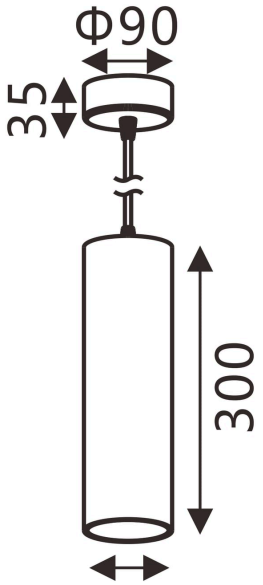

Models

Code	Power	Flux	CRI	Size	Beam
P3-4096	35 W	2400–2600 lm	97 CRI	Ø90 × 300 mm	18° 24° 36°


Finishes



Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

35 W

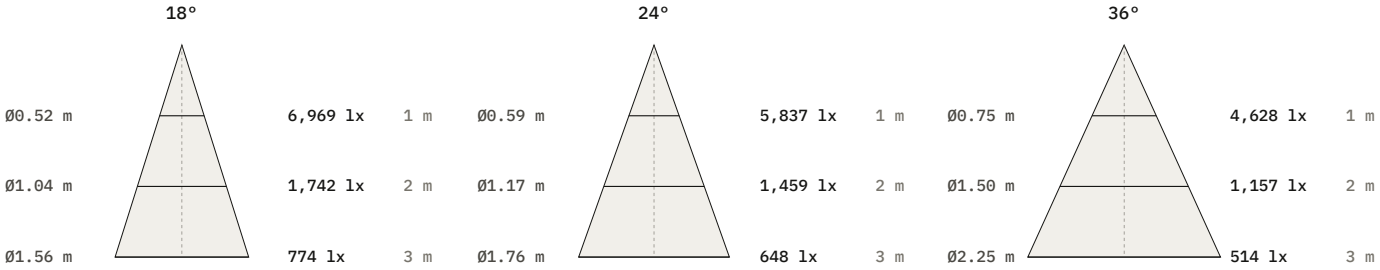



Beam	1 m	2 m	3 m
18°	6,969 lx Ø520 mm	1,742 lx Ø1040 mm	774 lx Ø1560 mm
24°	5,837 lx Ø590 mm	1,459 lx Ø1170 mm	648 lx Ø1760 mm
36°	4,628 lx Ø750 mm	1,157 lx Ø1500 mm	514 lx Ø2250 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4096, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


P3-4096, 35 W, 18° beam

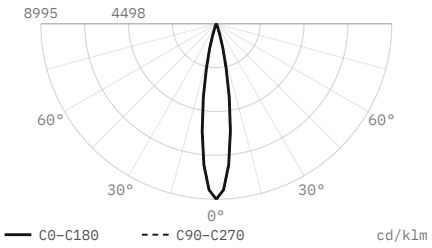


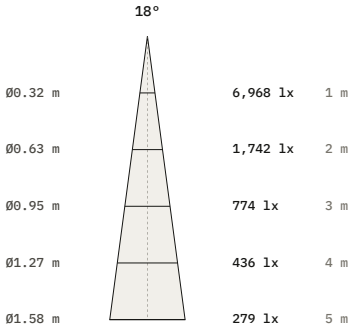

Luminous flux	775 lm
Efficacy	22 lm/W
Peak intensity	6,968 cd, 8,995 cd/klm
Beam angle (50%)	18°
Field angle (10%)	32.8°
Cut-off angle (2.5%)	20.5°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø90 × 300 mm
Data	Calculated from catalogue data


P3-4096, 35 W, 24° beam

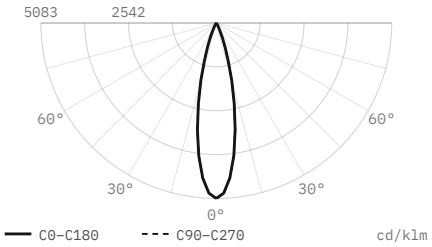


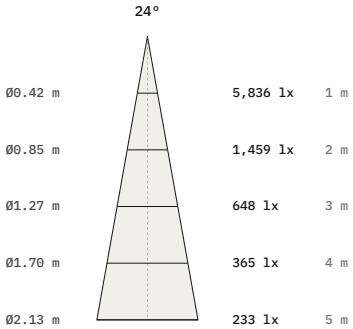

Luminous flux	1,148 lm
Efficacy	33 lm/W
Peak intensity	5,836 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø90 × 300 mm
Data	Calculated from catalogue data

P3-4096, 35 W, 36° beam

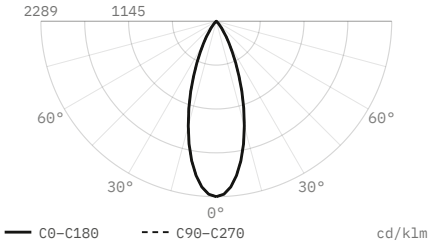

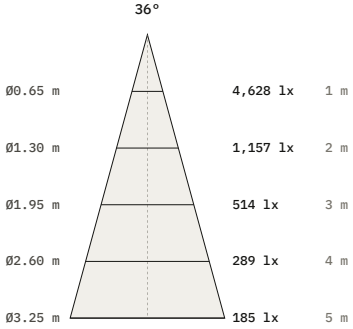

Luminous flux	2,022 lm
Efficacy	58 lm/W
Peak intensity	4,628 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø90 × 300 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.