Linear

PE-Y3-L

Linear luminaire





Linear luminaire. 30 or 40 W. 40° beam. 2700, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
30 W, 40 W	36 V	2700 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	40°	IP20
Mounting	**Finishes**	
Suspended	Black	

Dimensions

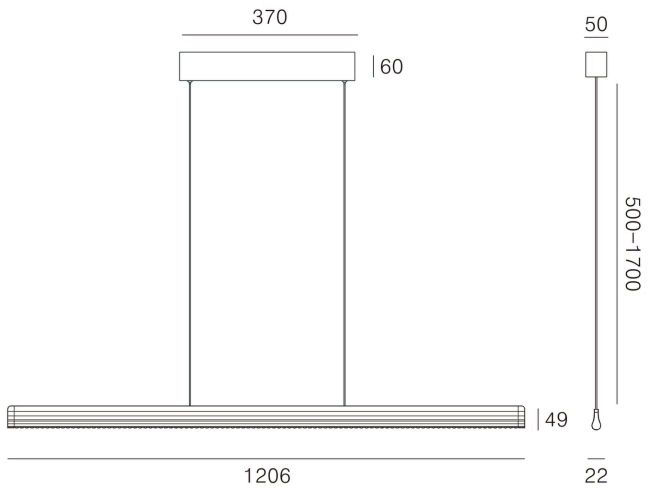

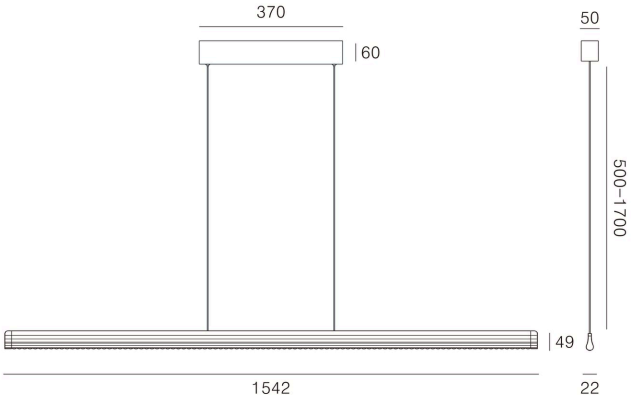


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
PE-Y3-L1200	30 W	36 V	97 CRI	L1206 x W22 x H49 mm	40°	700 mA
PE-Y3-L1600	40 W	36 V	97 CRI	L1542 x W22 x H49 mm	40°	950 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PE-Y3-L1600, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PE-Y3-L1600, 40 W, 40° beam

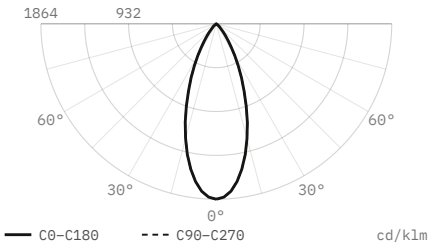

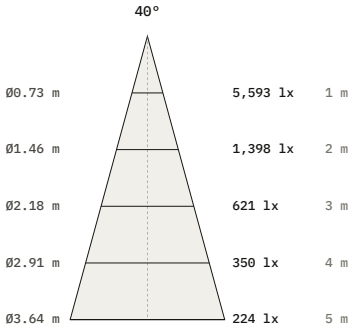

Luminous flux	**3,000 lm**
Efficacy	**75 lm/W**
Peak intensity	**5,593 cd, 1,864 cd/klm**
Beam angle (50%)	**40°**
Field angle (10%)	**72.9°**
Cut-off angle (2.5%)	**46°**
Flux 0–30° / 30–60° / 60–90°	**79.9 / 19.9 / 0.2 %**
Size	**1542 × 22 × 49 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.