Suspension

PE-Y3-R

Pendant





Pendant. 40, 50 or 60 W. 40° beam. 2700, 4000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Colour temperature
40 W, 50 W, 60 W	36 V	2700 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	40°	IP20
Mounting	**Finishes**	
Suspended	Black	

Dimensions

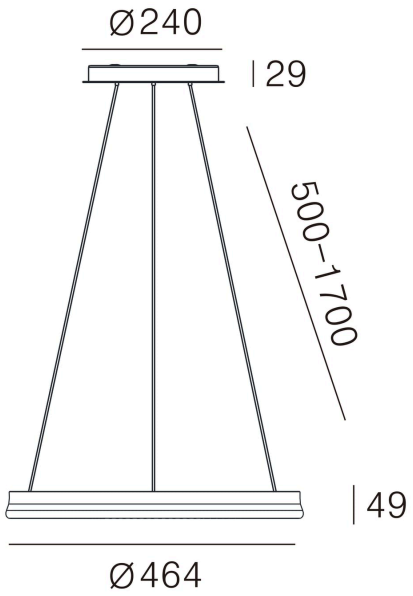

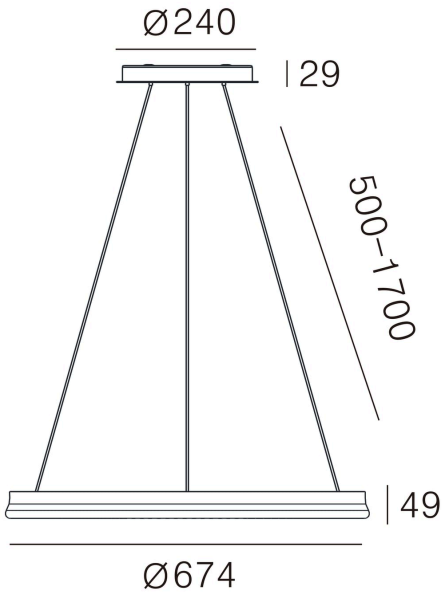

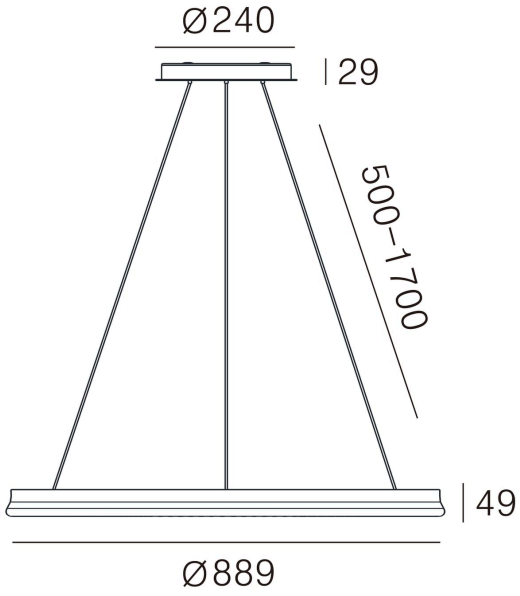


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
PE-Y3-R400	40 W	36 V	97 CRI	Ø464 x H49 mm	40°	950 mA
PE-Y3-R600	50 W	36 V	97 CRI	Ø674 x H49 mm	40°	1200 mA
PE-Y3-R800	60 W	36 V	97 CRI	Ø889 x H49 mm	40°	1400 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PE-Y3-R800, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PE-Y3-R800, 60 W, 40° beam

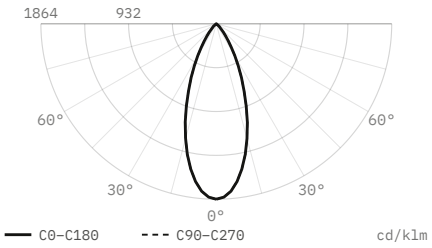

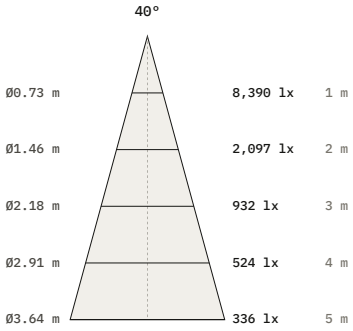

Luminous flux	4,500 lm
Efficacy	75 lm/W
Peak intensity	8,390 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	Ø889 × 49 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.