Linear

PE-Y6-L

Linear luminaire





Linear luminaire. 40 or 50 W. 45° beam. 2700, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
40 W, 50 W	36 V	2700 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	45°	IP20
Mounting	**Finishes**	
Suspended	Black	

Dimensions

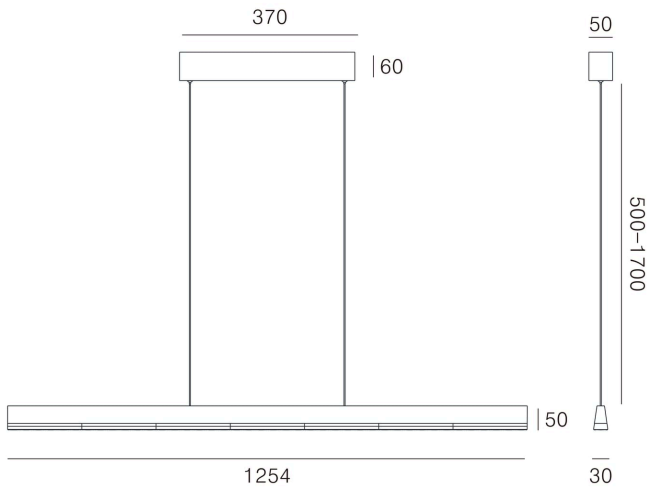

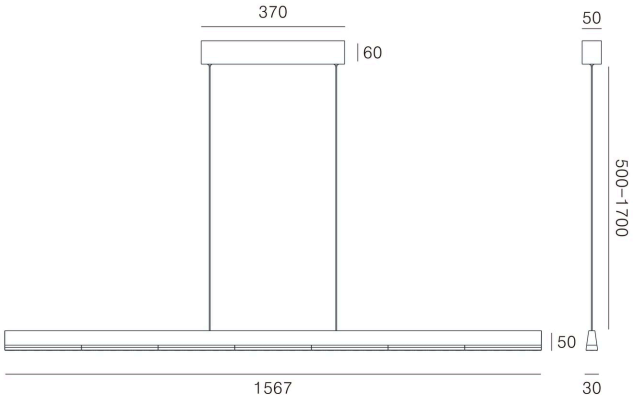


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
PE-Y6-L1250	40 W	36 V	97 CRI	L1254 x W30 x H50 mm	45°	950 mA
PE-Y6-L1560	50 W	36 V	97 CRI	L1567 x W30 x H50 mm	45°	1200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PE-Y6-L1560, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PE-Y6-L1560, 50 W, 45° beam

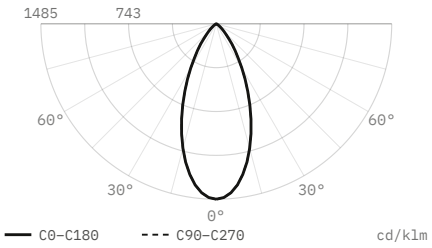

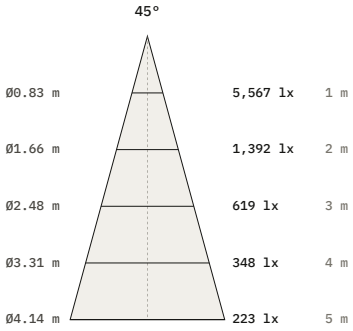

Luminous flux	**3,750 lm**
Efficacy	**75 lm/W**
Peak intensity	**5,567 cd, 1,485 cd/klm**
Beam angle (50%)	**45°**
Field angle (10%)	**82°**
Cut-off angle (2.5%)	**51.5°**
Flux 0–30° / 30–60° / 60–90°	**72.2 / 27.2 / 0.6 %**
Size	**1567 × 30 × 50 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.