Ceiling

Robo CH0203

Surface luminaire



Surface luminaire. 7 W. 75° beam. 2700, 3000, 4000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Luminous flux
7 W	**230 V AC**	**730 lm**
Colour temperature	CRI	Beam angles
2700 K, 3000 K, 4000 K	**97 CRI**	**75°**
IP rating	Certifications	Mounting
IP20	**CE**	**Surface**

Finishes

Black

Dimensions

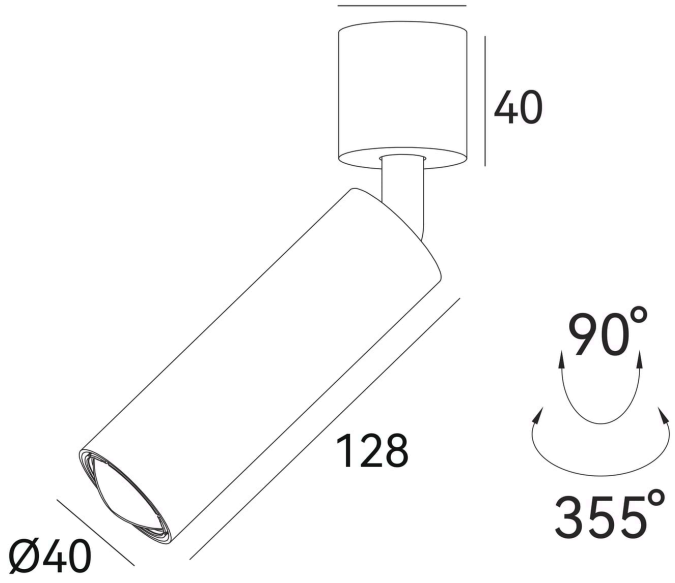


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0203	7 W	230 V AC	730 lm	97 CRI	Ø40 canopy x H40 mm; head Ø40 x L128 mm	75°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0203, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0203, 7 W, 75° beam

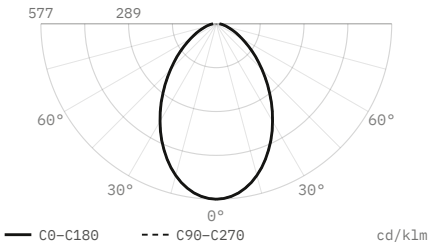

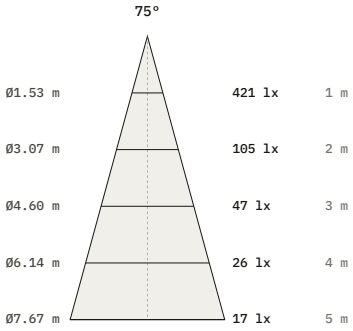

Luminous flux	**730 lm**
Efficacy	**104 lm/W**
Peak intensity	**421 cd, 577 cd/klm**
Beam angle (50%)	**75°**
Field angle (10%)	**136.7°**
Cut-off angle (2.5%)	**86.5°**
Flux 0–30° / 30–60° / 60–90°	**39.3 / 47.8 / 12.9 %**
Size	**Ø40 × 40 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.