Ceiling

Robo CH0204

Surface luminaire




Surface luminaire. 8 W. 75° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **8 W**	Voltage **230 V AC**	Luminous flux **730 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **75°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **Black**		

Dimensions

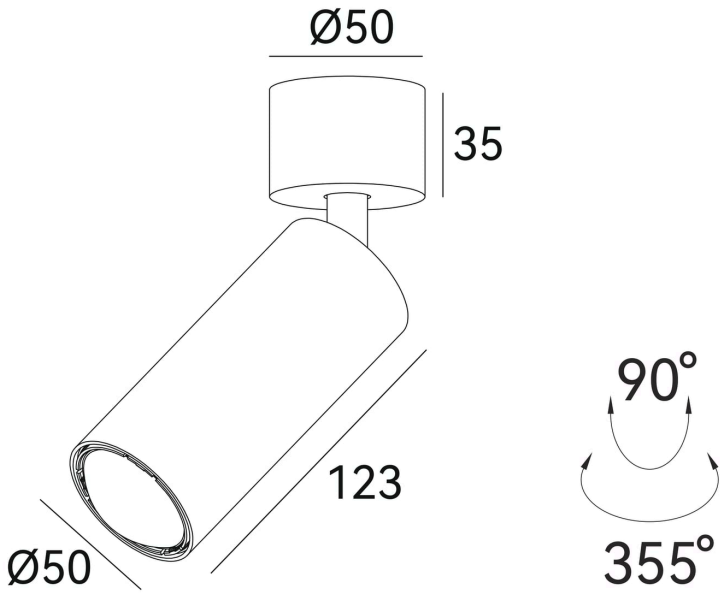


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0204	8 W	230 V AC	730 lm	97 CRI	Ø50 canopy x H35 mm; head Ø50 x L123 mm	75°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0204, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0204, 8 W, 75° beam

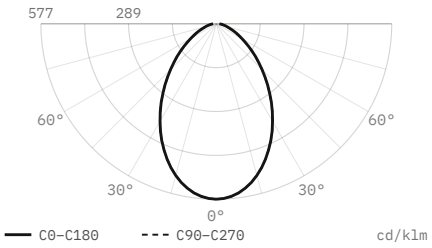

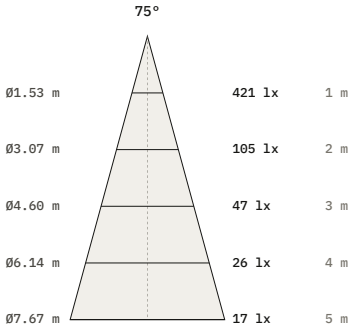

Luminous flux	**730 lm**
Efficacy	**91 lm/W**
Peak intensity	**421 cd, 577 cd/klm**
Beam angle (50%)	**75°**
Field angle (10%)	**136.7°**
Cut-off angle (2.5%)	**86.5°**
Flux 0–30° / 30–60° / 60–90°	**39.3 / 47.8 / 12.9 %**
Size	**Ø50 × 35 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.