Downlights

Robo DL1510

Recessed spotlight



Recessed spotlight.

- Ceiling cut-out Ø2 mm
- LED source: Citizen

Voltage	Luminous flux	Colour temperature
max 12 V	2 × 100 lm	2700 K, 3000 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	10°	IP20
Certifications	**Mounting**	**Finishes**
CE	Recessed	White


Models


Code	Version	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1510	2 heads	max 12 V	2 × 100 lm	97 CRI	168 × 90 x H85 mm; heads Ø40 mm	Ø2 mm	10°	600 mA; Power per head

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1510, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1510, 10° beam

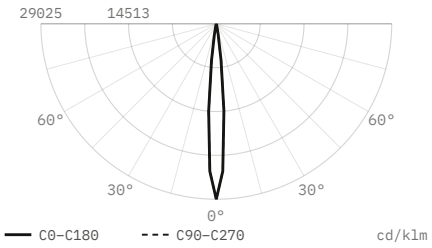

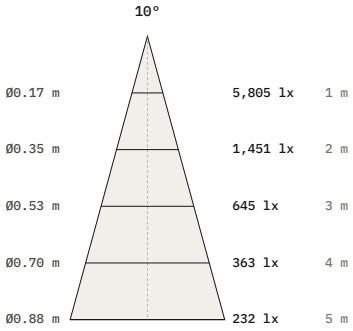

Luminous flux	**200 lm**
Peak intensity	**5,805 cd, 29,025 cd/klm**
Beam angle (50%)	**10°**
Field angle (10%)	**18.2°**
Cut-off angle (2.5%)	**11.5°**
Flux 0–30° / 30–60° / 60–90°	**100 / 0 / 0 %**
Size	**168 × 90 × 85 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.