Downlights

Robo DL1858

Recessed spotlight



Recessed spotlight. 35 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø245 mm
- LED source: Citizen

Power **35 W**	Voltage **5 × max 19 V**	Luminous flux **5 × 630 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		

Dimensions

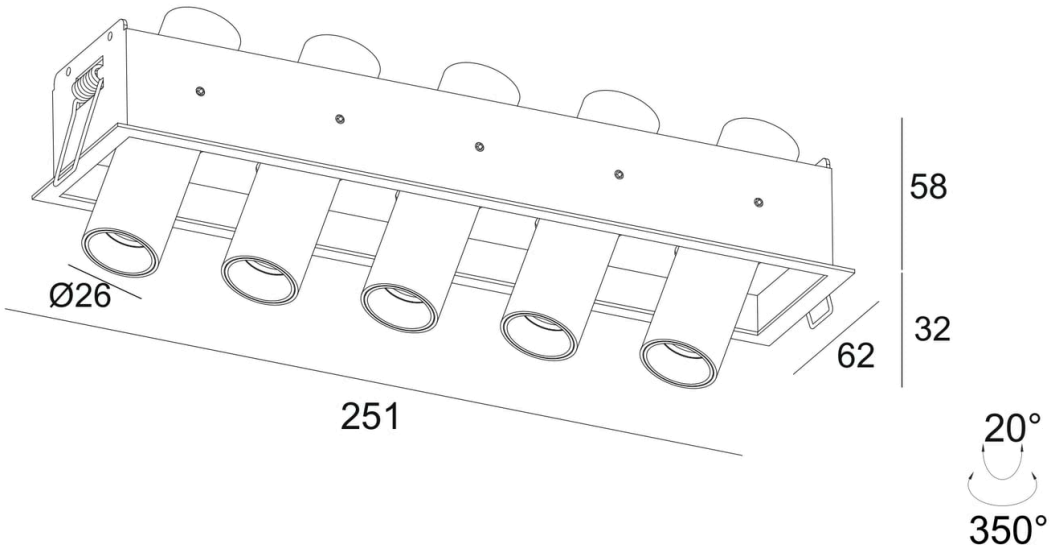

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1858	5 heads	35 W	5 × max 19 V	5 × 630 lm	97 CRI	251 × 62 mm; heights 58 / 32, Ø26 mm head	Ø245 mm	15° 24° 36° 50°	350 mA; Power per head

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1858, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1858, 35 W, 15° beam

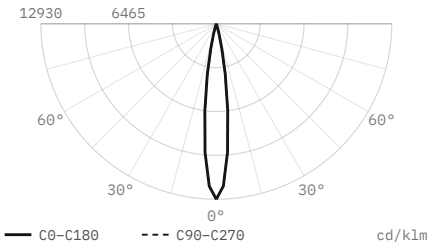

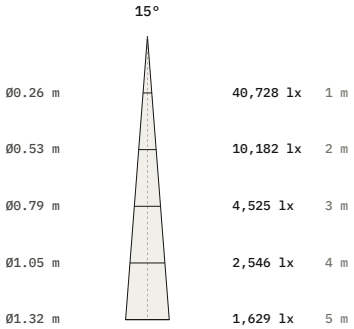

Luminous flux	3,150 lm
Efficacy	90 lm/W
Peak intensity	40,728 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	251 × 62 mm
Data	Calculated from catalogue data

DL1858, 35 W, 24° beam

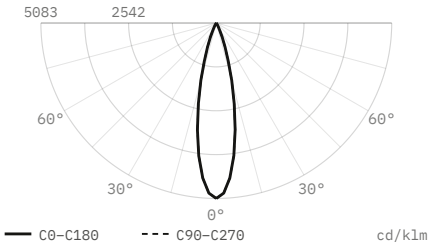

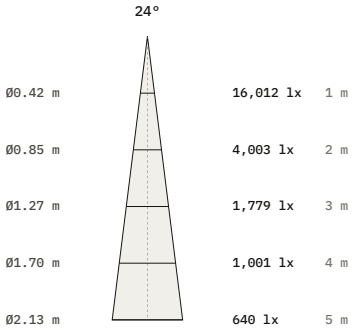

Luminous flux	3,150 lm
Efficacy	90 lm/W
Peak intensity	16,012 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	251 × 62 mm
Data	Calculated from catalogue data

DL1858, 35 W, 36° beam

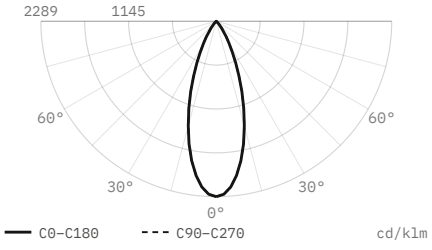

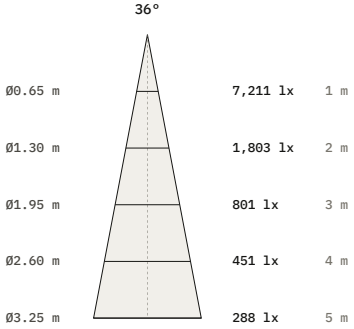

Luminous flux	3,150 lm
Efficacy	90 lm/W
Peak intensity	7,211 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	251 × 62 mm
Data	Calculated from catalogue data

DL1858, 35 W, 50° beam

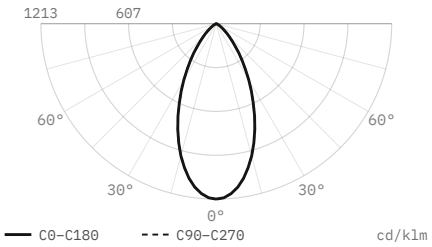

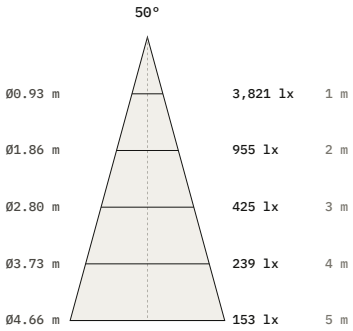

Luminous flux	3,150 lm
Efficacy	90 lm/W
Peak intensity	3,821 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	251 × 62 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.