Downlights

Robo Zoom DL1342

Recessed spotlight





Recessed spotlight. 26 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø2 mm
- LED source: Citizen

Power	Voltage	Luminous flux
26 W	2 × max 37 V	2 × 1180 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Recessed	White

Dimensions

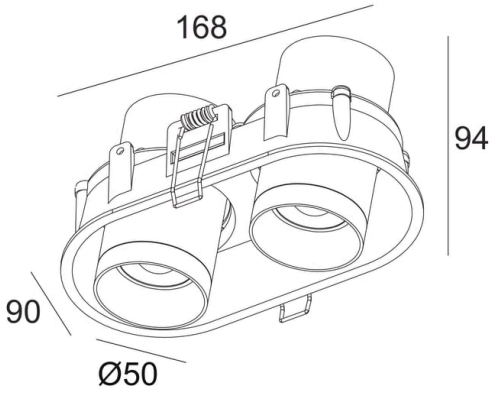




Models


Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1342	2 heads, 15–60°	26 W	2 × max 37 V	2 × 1180 lm	97 CRI	168 × 90 mm oval flange, Ø50 heads, H94 mm	Ø2 mm	350 mA; Power per head

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1342, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1342, 26 W, wide distribution

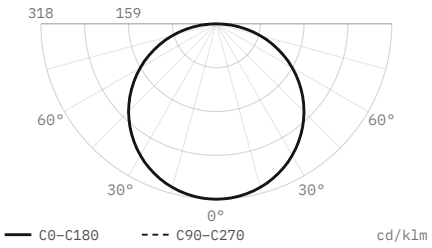

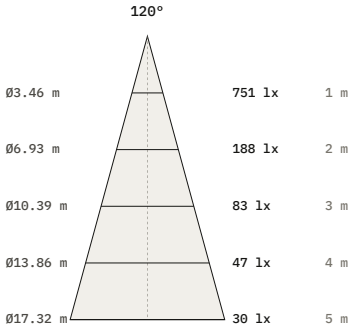

Luminous flux	2,360 lm
Efficacy	91 lm/W
Peak intensity	751 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø50 × 94 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.