Downlights

Robo Zoom DL1343

Recessed spotlight




Recessed spotlight. 13 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø95 mm
- LED source: Citizen

Power	Voltage	Luminous flux
13 W	max 37 V	1180 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Recessed	White

Dimensions

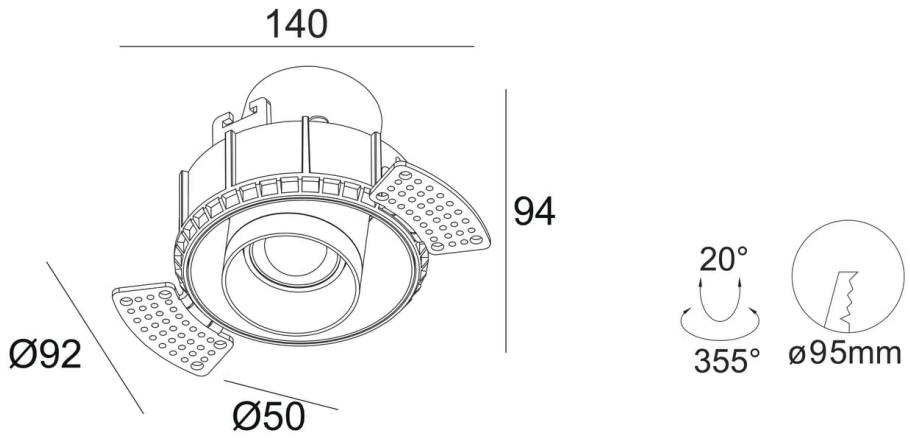


Models


Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1343	15–60°	13 W	max 37 V	1180 lm	97 CRI	Ø92 mm body, 140 mm with plaster wings, Ø50 head, H94 mm	Ø95 mm	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1343, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1343, 13 W, wide distribution

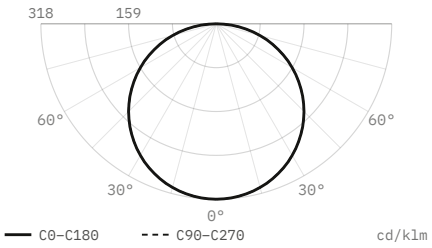

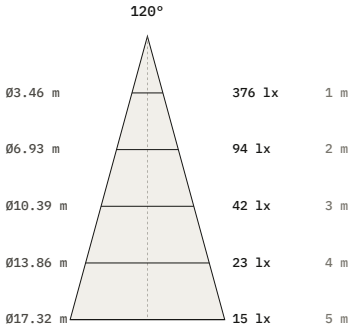

Luminous flux	**1,180 lm**
Efficacy	**91 lm/W**
Peak intensity	**376 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø92 × 94 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.