Ceiling

Roll CH0122

Surface luminaire




Surface luminaire. 13, 16 or 26 W. 100° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **13 W, 16 W, 26 W**	Voltage **230 V AC**	Luminous flux **1300 lm, 1600 lm, 2600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **100°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Control **Triac, DALI**	Finishes **White, Black**	

Dimensions

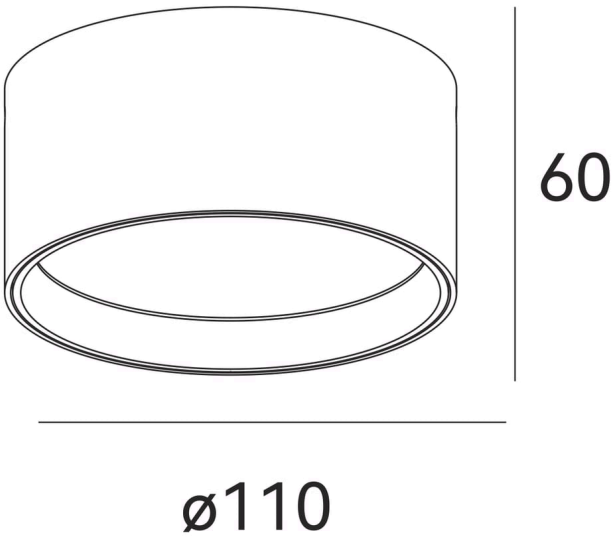

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CH0122	13 W	230 V AC	1300 lm	97 CRI	Ø110 × 60 mm	100°
CH0123	16 W	230 V AC	1600 lm	97 CRI	Ø145 × 60 mm	100°
CH0124	26 W	230 V AC	2600 lm	97 CRI	Ø185 × 60 mm	100°

Finishes



Black





White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0124, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0124, 26 W, 100° beam

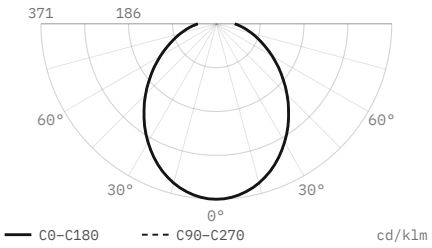

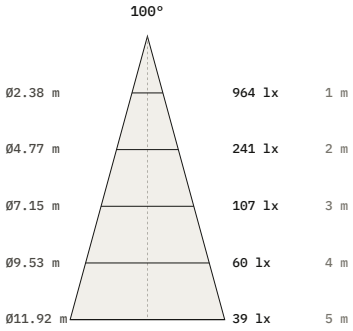

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	964 cd, 371 cd/klm
Beam angle (50%)	100°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	27.6 / 47.2 / 25.2 %
Size	Ø185 × 60 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.