Ceiling

Roll CH0263

Surface luminaire




Surface luminaire. 11 W. Five beam angles, 15° to 55°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **11 W**	Voltage **230 V AC**	Luminous flux **1000 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°, 55°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **White**		

Dimensions

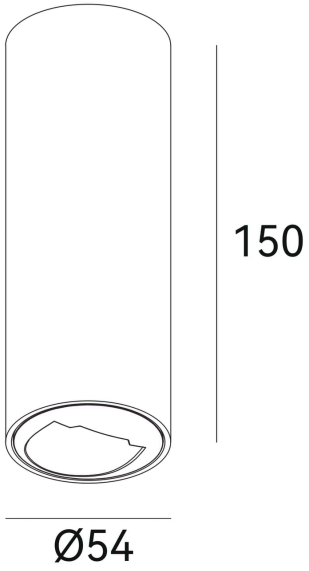


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam
CH0263	Wall washer	11 W	230 V AC	1000 lm	97 CRI	Ø54 × 150 mm	15° 24° 36° 50° 55°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0263, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0263, 11 W, wall washer

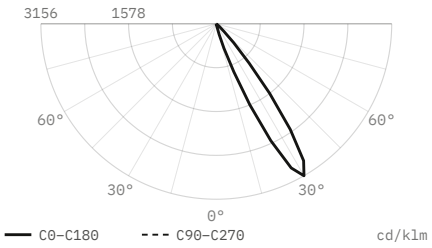


Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	3,156 cd, 3,156 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	77°
Flux 0–30° / 30–60° / 60–90°	22.1 / 74.6 / 3.3 %
Size	Ø54 × 150 mm
Data	Calculated from catalogue data

CH0263, 11 W, wall washer

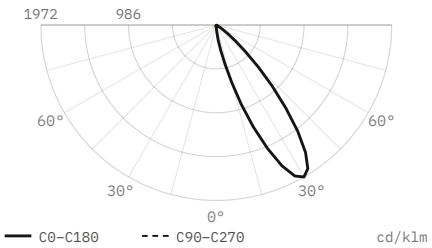


Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	1,972 cd, 1,972 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	78°
Flux 0–30° / 30–60° / 60–90°	25.9 / 69.9 / 4.2 %
Size	Ø54 × 150 mm
Data	Calculated from catalogue data

CH0263, 11 W, wall washer

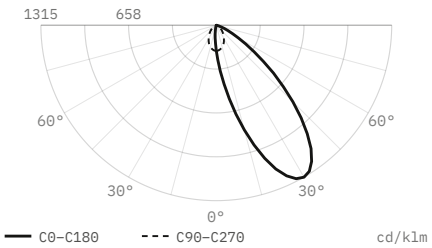


Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	1,315 cd, 1,315 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	79.5°
Flux 0–30° / 30–60° / 60–90°	28.9 / 63.4 / 7.7 %
Size	Ø54 × 150 mm
Data	Calculated from catalogue data

CH0263, 11 W, wall washer

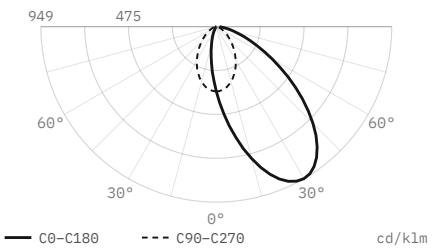

Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	949 cd, 949 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	87.5°
Flux 0–30° / 30–60° / 60–90°	30.7 / 56 / 13.3 %
Size	Ø54 × 150 mm
Data	Calculated from catalogue data

CH0263, 11 W, wall washer

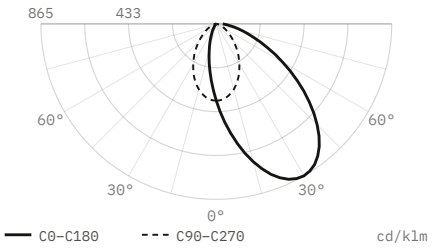

Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	865 cd, 865 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	30.9 / 53.9 / 15.2 %
Size	Ø54 × 150 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.