
Ceiling

Roll CH0265

Surface luminaire

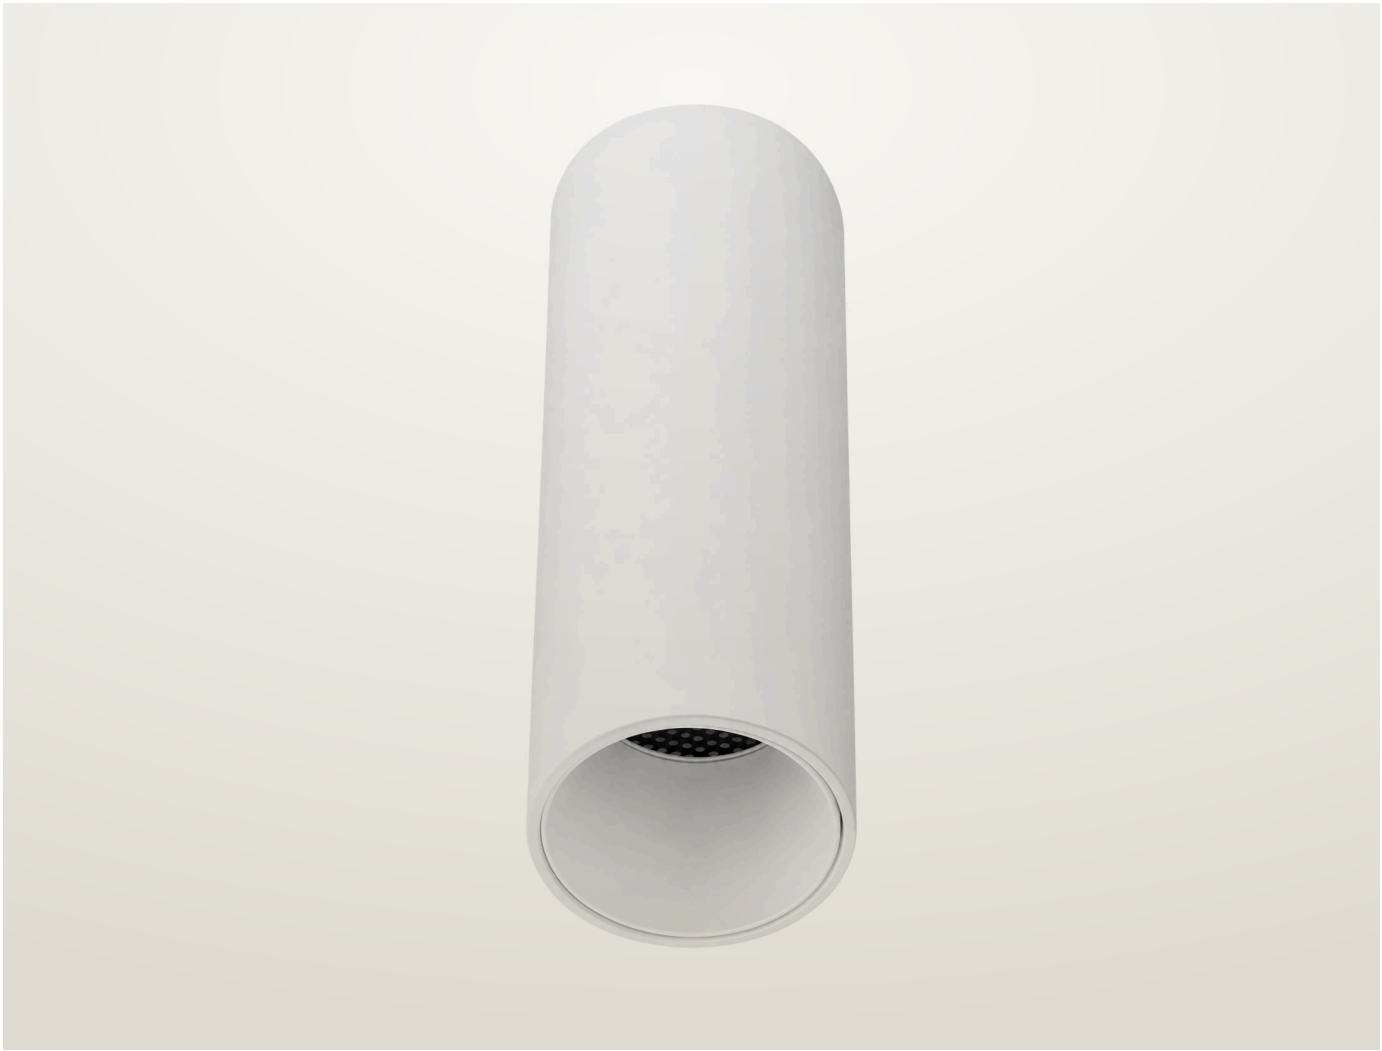

Surface luminaire. 11 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **11 W**	Voltage **230 V AC**	Luminous flux **1000 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **White**		


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0265	11 W	230 V AC	1000 lm	97 CRI	Ø68 × 180 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0265, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


CH0265, 11 W, 15° beam

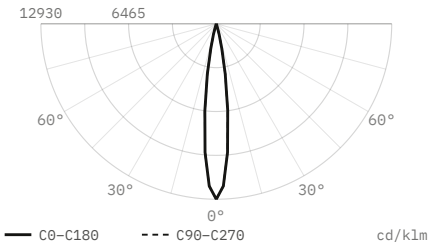


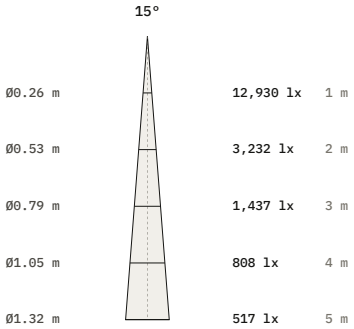

Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	12,930 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø68 × 180 mm
Data	Calculated from catalogue data


CH0265, 11 W, 24° beam

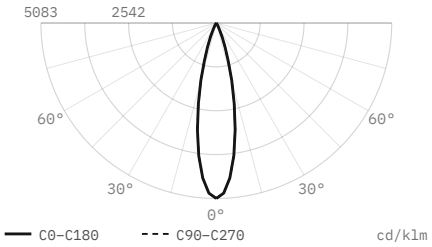


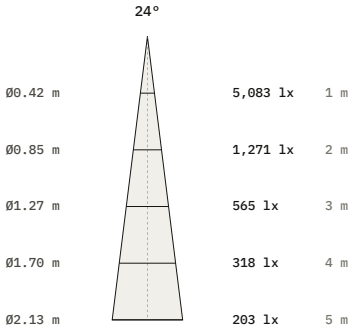

Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	5,083 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø68 × 180 mm
Data	Calculated from catalogue data


CH0265, 11 W, 36° beam

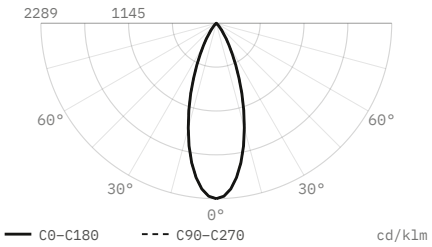


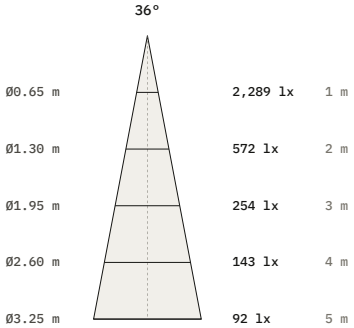

Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	2,289 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø68 × 180 mm
Data	Calculated from catalogue data

CH0265, 11 W, 50° beam

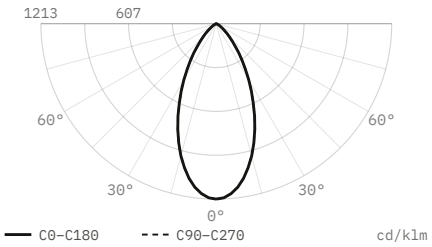

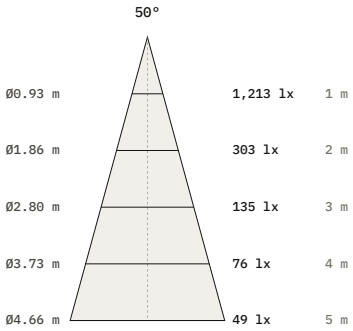

Luminous flux	1,000 lm
Efficacy	91 lm/W
Peak intensity	1,213 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø68 × 180 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.