Ceiling

Roll CH0269

Surface luminaire



Surface luminaire. 14 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **14 W**	Voltage **230 V AC**	Luminous flux **1300 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **White**		


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0269	14 W	230 V AC	1300 lm	97 CRI	150 × 80 × 100 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0269, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


CH0269, 14 W, 15° beam

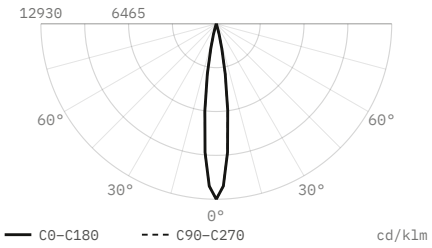


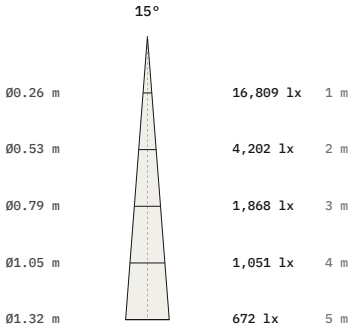

Luminous flux	1,300 lm
Efficacy	93 lm/W
Peak intensity	16,809 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	150 × 80 × 100 mm
Data	Calculated from catalogue data


CH0269, 14 W, 24° beam

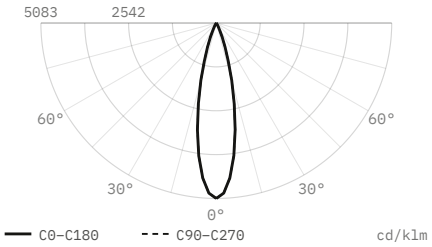


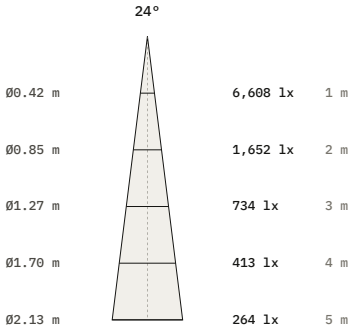

Luminous flux	1,300 lm
Efficacy	93 lm/W
Peak intensity	6,608 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	150 × 80 × 100 mm
Data	Calculated from catalogue data


CH0269, 14 W, 36° beam

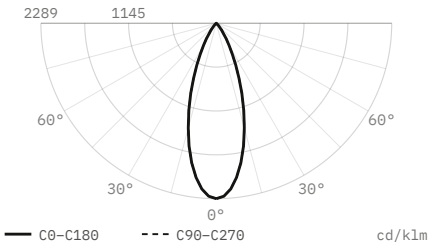


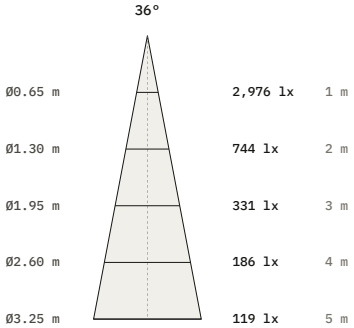

Luminous flux	1,300 lm
Efficacy	93 lm/W
Peak intensity	2,976 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	150 × 80 × 100 mm
Data	Calculated from catalogue data

CH0269, 14 W, 50° beam

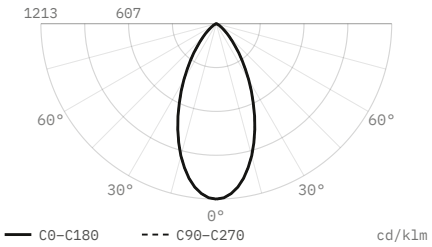

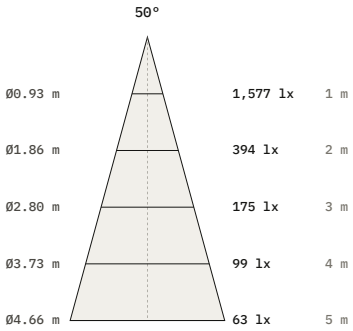

Luminous flux	**1,300 lm**
Efficacy	**93 lm/W**
Peak intensity	**1,577 cd, 1,213 cd/klm**
Beam angle (50%)	**50°**
Field angle (10%)	**91.1°**
Cut-off angle (2.5%)	**57.5°**
Flux 0–30° / 30–60° / 60–90°	**64.8 / 33.6 / 1.5 %**
Size	**150 × 80 × 100 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.