
Ceiling

Roll CH0303

Surface luminaire

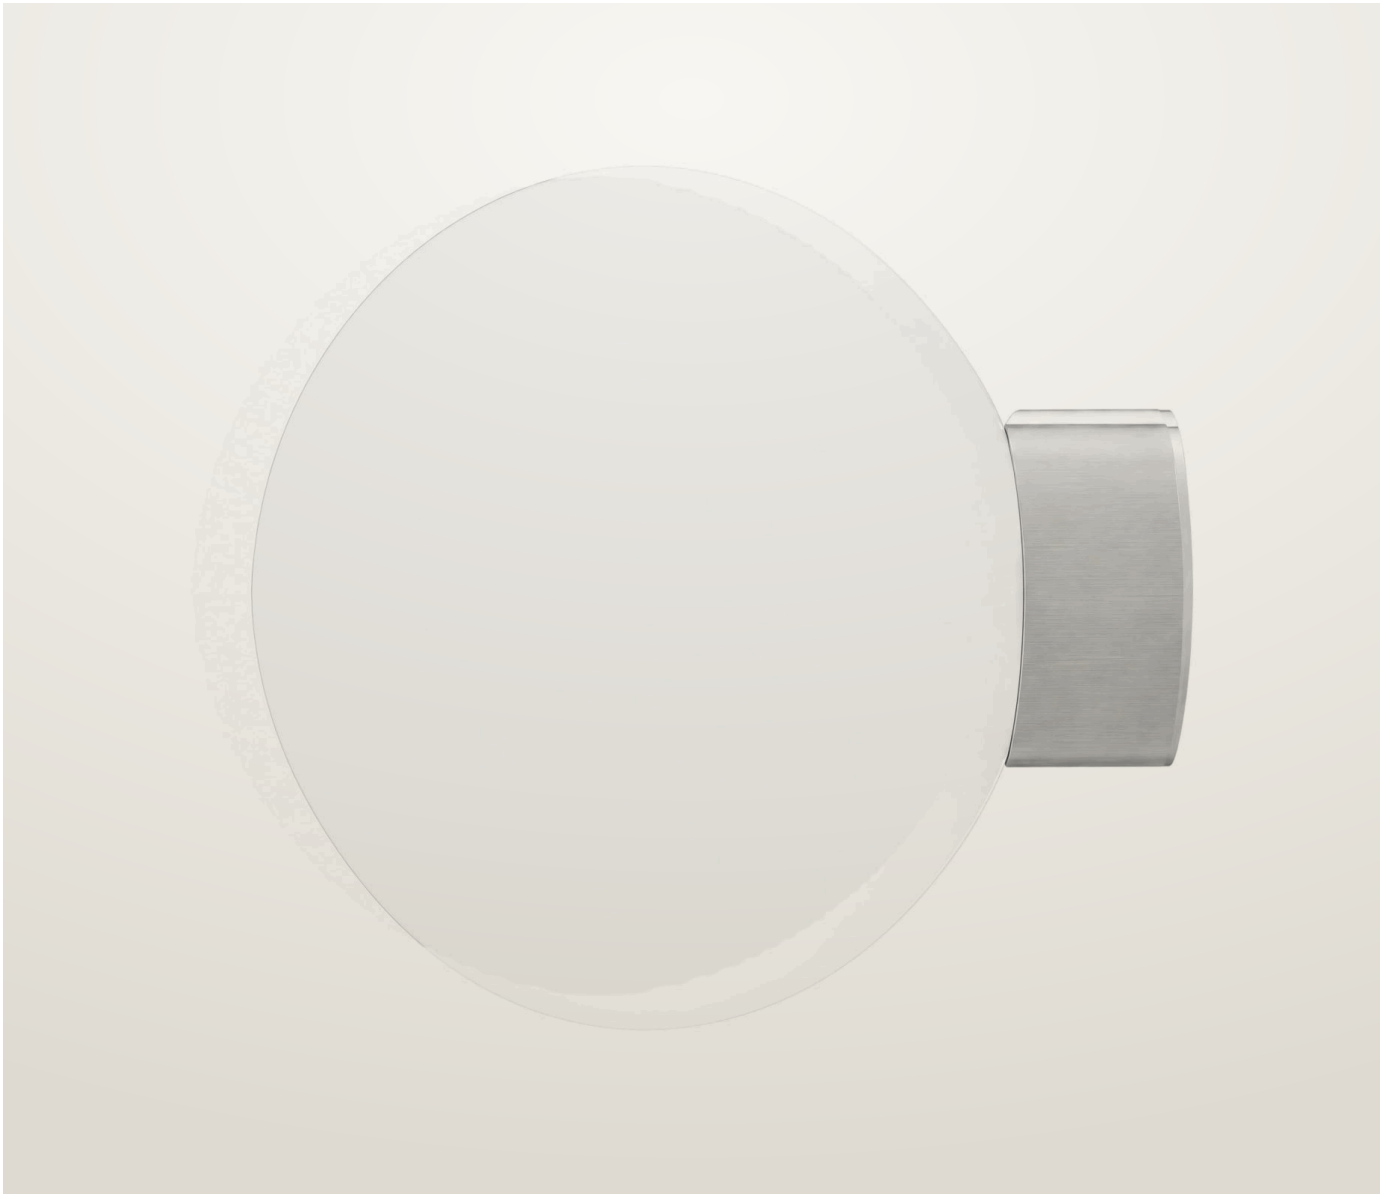


Surface luminaire. 3 W. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
3 W	230 V AC	250 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Surface	White

Dimensions

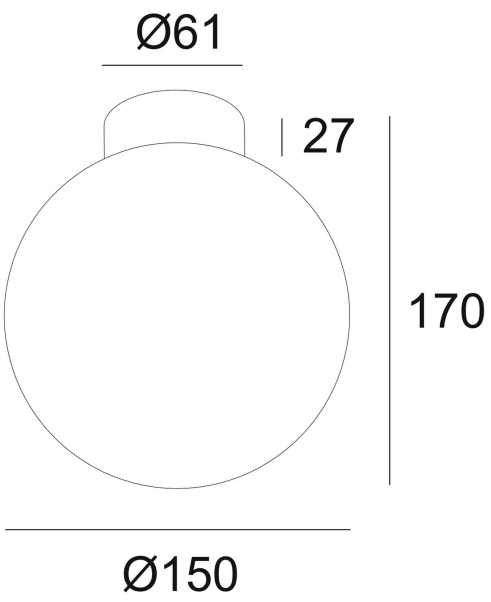


Models


Code	Power	Voltage	Flux	CRI	Size
CH0303	3 W	230 V AC	250 lm	97 CRI	Ø150 × 170 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0303, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0303, 3 W, wide distribution

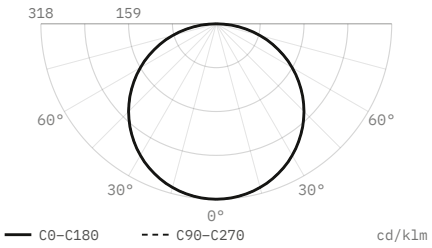

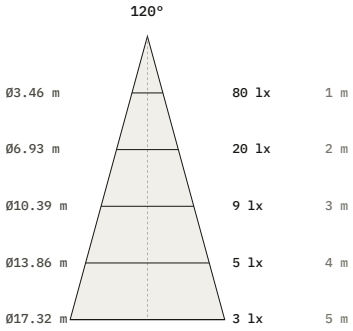

Luminous flux	250 lm
Efficacy	83 lm/W
Peak intensity	80 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø150 × 170 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.