Suspension

Roll PH0023

Pendant




Pendant.

- LED source: Citizen

Voltage	Luminous flux	Colour temperature
230 V AC	1300 / 1800 / 2600 lm	2700 K, 3000 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	15°, 30°, 50°	IP20
Certifications	**Mounting**	**Finishes**
CE	Suspended	Black

Dimensions

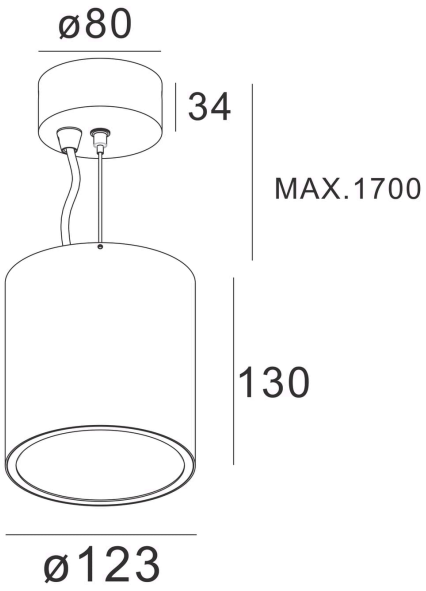


Models


Code	Voltage	Flux	CRI	Size	Beam
PH0023	230 V AC	1300 / 1800 / 2600 lm	97 CRI	Ø123 × 130 mm (canopy Ø80 × 34, max. suspension 1700)	15° 30° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0023, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


PH0023, 15° beam

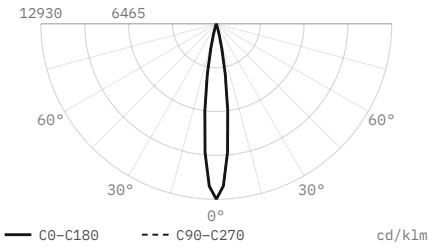


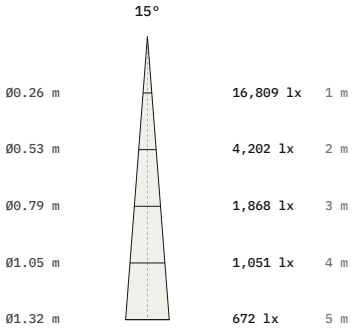

Luminous flux	1,300 lm
Peak intensity	16,809 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø123 × 130 mm
Data	Calculated from catalogue data


PH0023, 30° beam

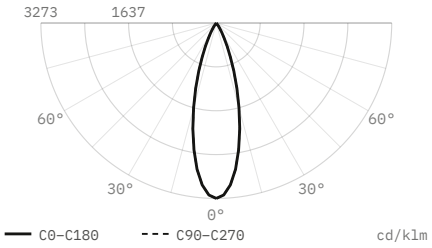


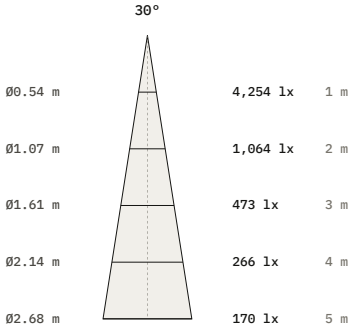

Luminous flux	1,300 lm
Peak intensity	4,254 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	Ø123 × 130 mm
Data	Calculated from catalogue data

PH0023, 50° beam

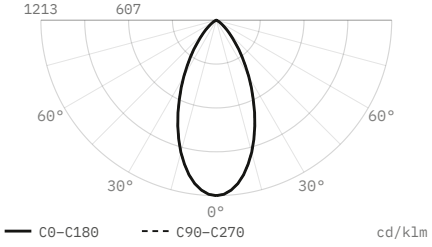

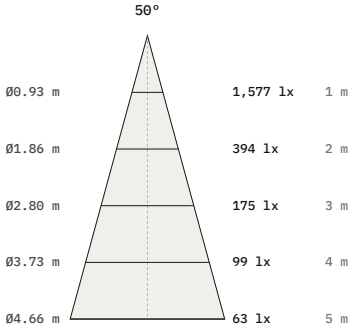

Luminous flux	1,300 lm
Peak intensity	1,577 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø123 × 130 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.