Outdoor

Spike SL0029

Outdoor luminaire



Outdoor luminaire. 3 W. 24° or 36° beam. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power **3 W**	Voltage **24 V DC**	Luminous flux **240 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°**
IP rating **IP65**	Certifications **CE**	Mounting **Floor, Surface, Wall**
Finishes **Black**		


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
SL0029	3 W	24 V DC	240 lm	97 CRI	Head Ø40 x L75 mm; overall H800 (includes ground blade H200 x W40 mm)	24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0029, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


SL0029, 3 W, 24° beam

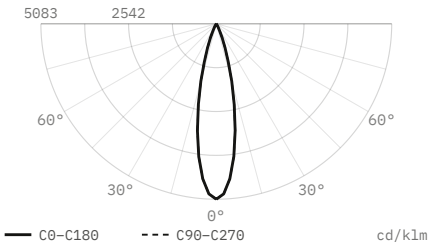


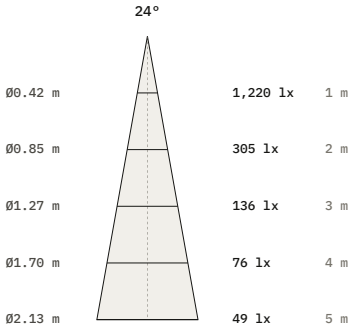

Luminous flux	240 lm
Efficacy	80 lm/W
Peak intensity	1,220 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 75 mm
Data	Calculated from catalogue data

SL0029, 3 W, 36° beam

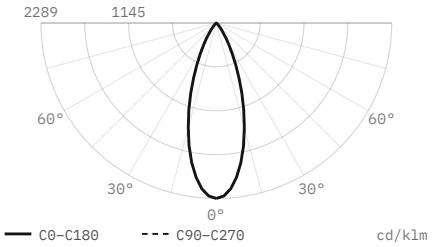

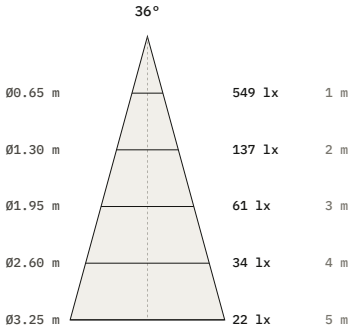

Luminous flux	240 lm
Efficacy	80 lm/W
Peak intensity	549 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 75 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.