Outdoor

Spike SL0030

Outdoor luminaire



Outdoor luminaire.

- LED source: Citizen

Voltage	Luminous flux	Colour temperature
24 V DC	2 × 240 lm	2700 K, 3000 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	24°, 36°	IP65
Certifications	**Mounting**	**Finishes**
CE	Floor, Surface, Wall	Black


Models


Code	Voltage	Flux	CRI	Size	Beam
SL0030	24 V DC	2 × 240 lm	97 CRI	Head Ø40 x L75 mm (two heads); overall H800 (includes ground blade H200 x W40 mm)	24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0030, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


SL0030, 24° beam

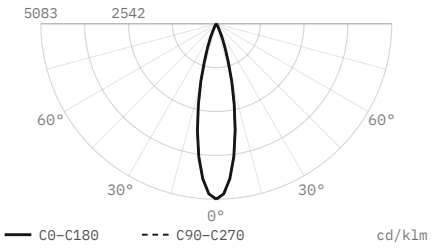


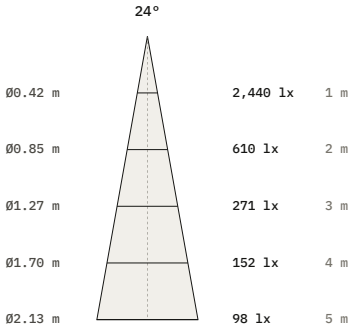

Luminous flux	480 lm
Peak intensity	2,440 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 75 mm
Data	Calculated from catalogue data

SL0030, 36° beam

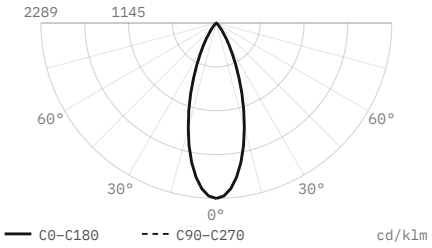

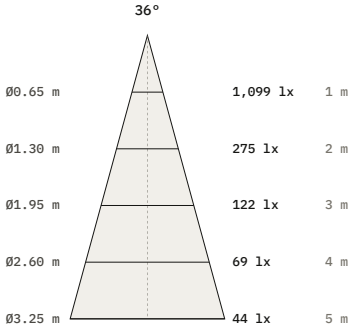

Luminous flux	480 lm
Peak intensity	1,099 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 75 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.