Wall Lamps

Star DL0729

Wall light




Wall light. 1 W. 2700, 3000, 4000 K. IP65. 97 CRI.

- Ceiling cut-out Ø36 mm
- LED source: Citizen

Power	Voltage	Luminous flux
1 W	max 3 V, 24 V DC	40 / 100 lm, 40 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP65
Certifications	**Mounting**	**Finishes**
CE	Recessed, Wall	Black

Dimensions

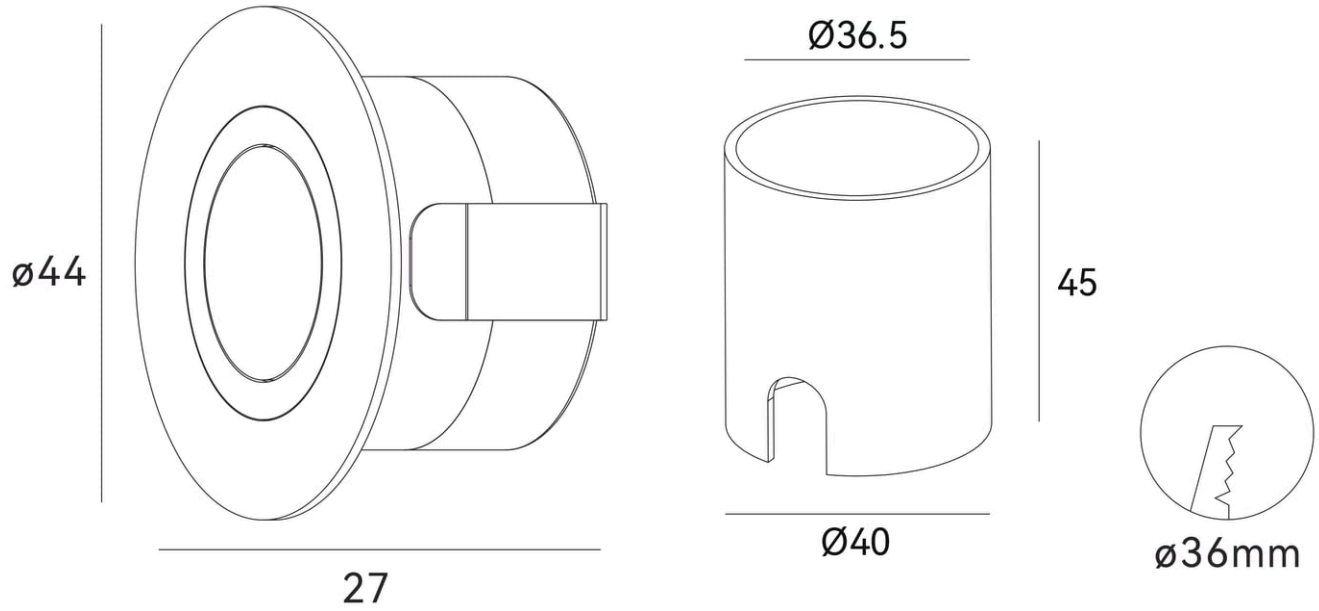


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL0729		max 3 V	40 / 100 lm	97 CRI	Ø44 × 27 mm (flange); body Ø36.5/Ø40 × 45 mm	Ø36 mm	350 / 700 mA
DL0730	1 W	24 V DC	40 lm	97 CRI		Ø36 mm	

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0730, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0730, 1 W, wide distribution

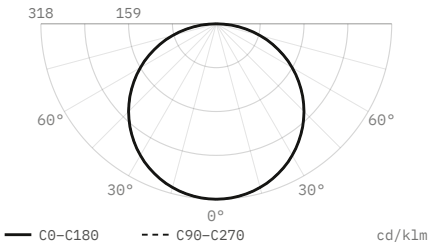

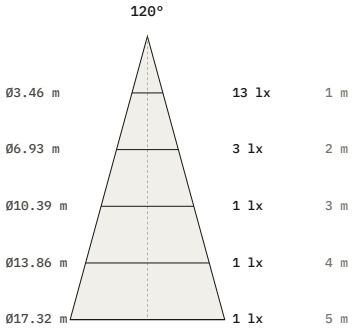

Luminous flux	**40 lm**
Efficacy	**40 lm/W**
Peak intensity	**13 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.