
Wall Lamps

# Star DL1196

Wall light

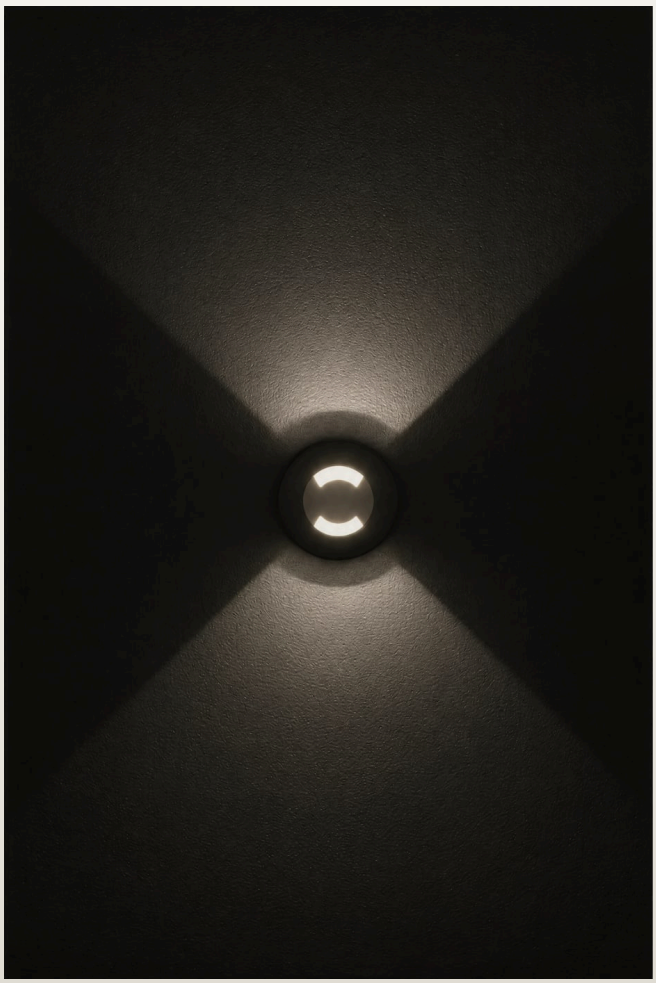

Wall light. 2 W. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø40 mm
- LED source: Citizen

| Power | Voltage | Luminous flux |
|---|---|---|
| 2 W | max 3 V | 100 lm |
| **Colour temperature** | **CRI** | **IP rating** |
| 2700 K, 3000 K, 4000 K | 97 CRI | IP67 |
| **Certifications** | **Mounting** | **Finishes** |
| CE | Recessed, Wall | Black |


# Models


| Code | Power | Voltage | Flux | CRI | Size | Cut-out | Notes |
|---|---|---|---|---|---|---|---|
| **DL1196** | 2 W | max 3 V | 100 lm | 97 CRI | Ø50 × 39 mm (flange); body Ø39/Ø43 × 55 mm | Ø40 mm | 700 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1196, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## DL1196, 2 W, wide distribution

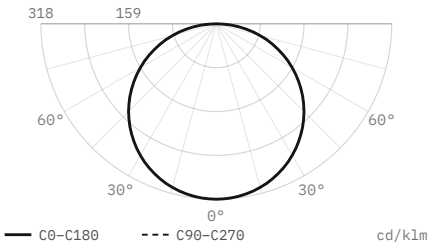

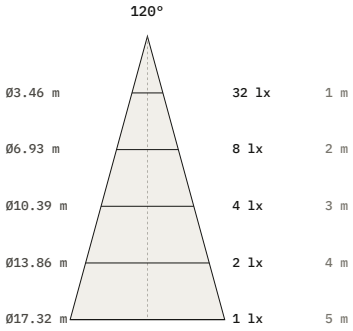
| | |
|---|---|
| Luminous flux | 100 lm |
| Efficacy | 50 lm/W |
| Peak intensity | 32 cd, 318 cd/klm |
| Beam angle (50%) | 120° |
| Field angle (10%) | 168.5° |
| Cut-off angle (2.5%) | 88.5° |
| Flux 0–30° / 30–60° / 60–90° | 25 / 50 / 25 % |
| Size | Ø50 × 39 mm |
| Data | Calculated from catalogue data |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.