
Wall Lamps

Star DL1200

Wall light

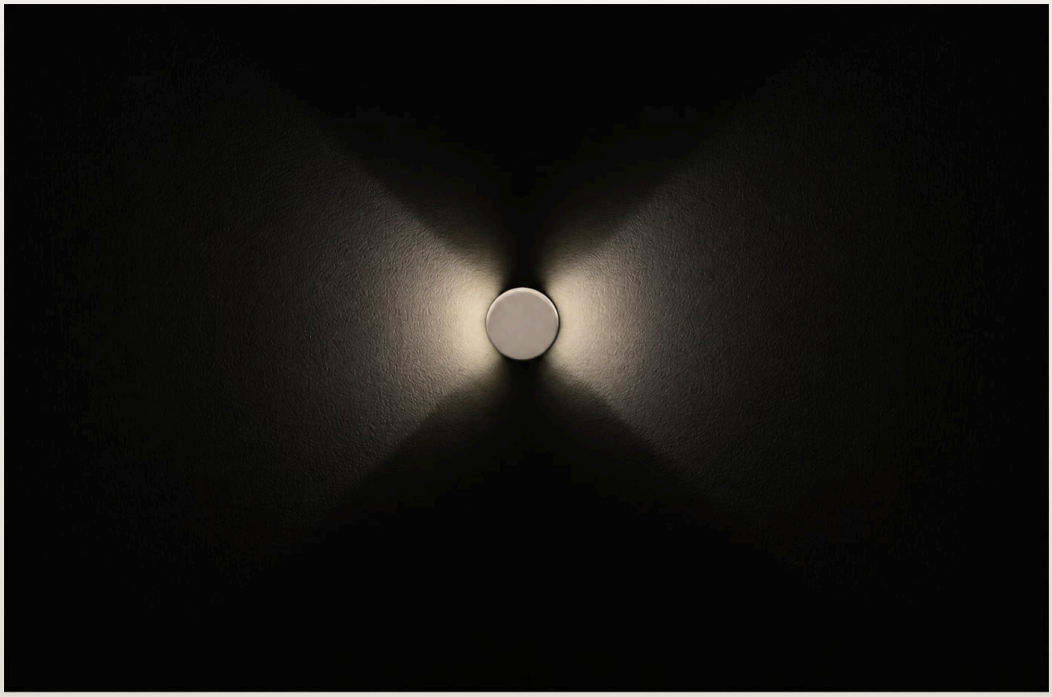

Wall light. 2 W. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø40 mm
- LED source: Citizen

Power	Voltage	Luminous flux
2 W	max 3 V	100 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP67
Certifications	**Mounting**	**Finishes**
CE	Recessed, Wall	White


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1200	2 W	max 3 V	100 lm	97 CRI	Ø50 × 39 mm (flange); body Ø39/Ø43 × 55 mm	Ø40 mm	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1200, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1200, 2 W, wide distribution

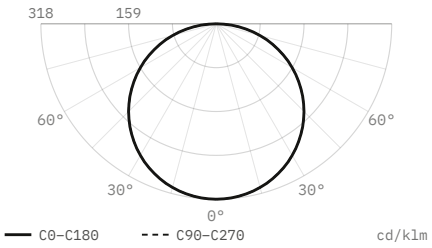

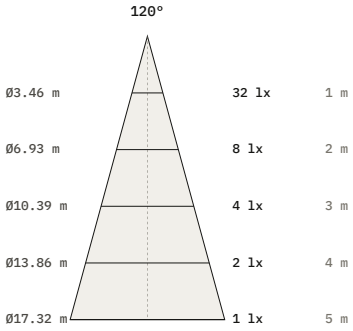

Luminous flux	**100 lm**
Efficacy	**50 lm/W**
Peak intensity	**32 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø50 × 39 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.