
Wall Lamps

Star DL1203

Wall light

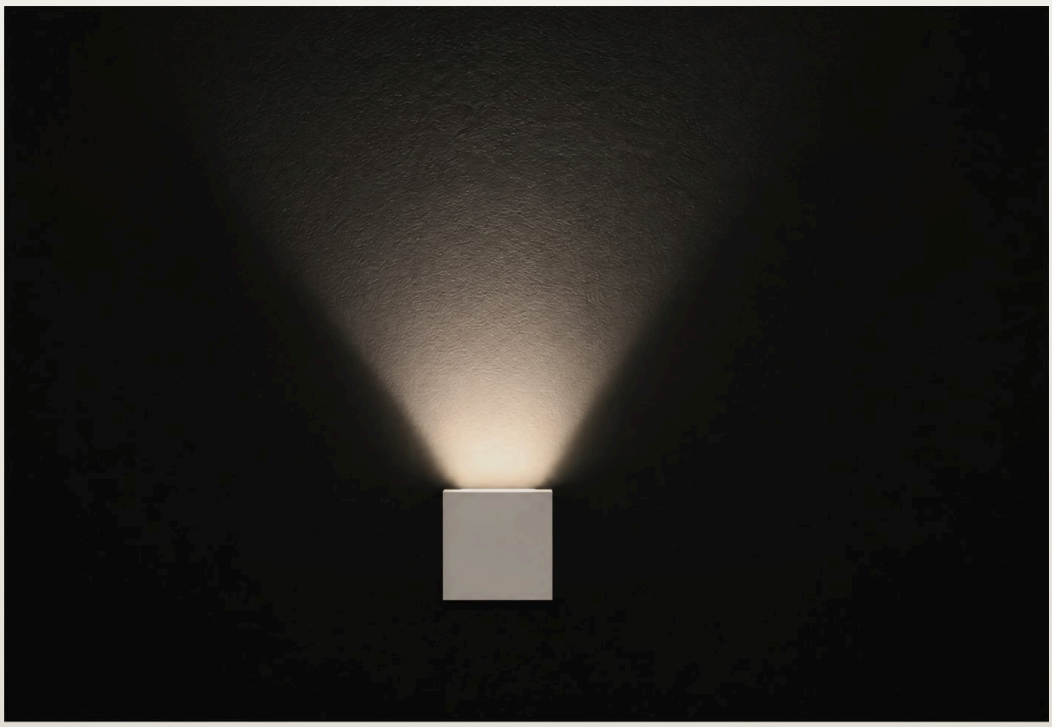


Wall light. 2 W. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø40 mm
- LED source: Citizen

Power	Voltage	Luminous flux
2 W	max 3 V	100 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP67
Certifications	**Mounting**	**Finishes**
CE	Recessed, Wall	White

Dimensions

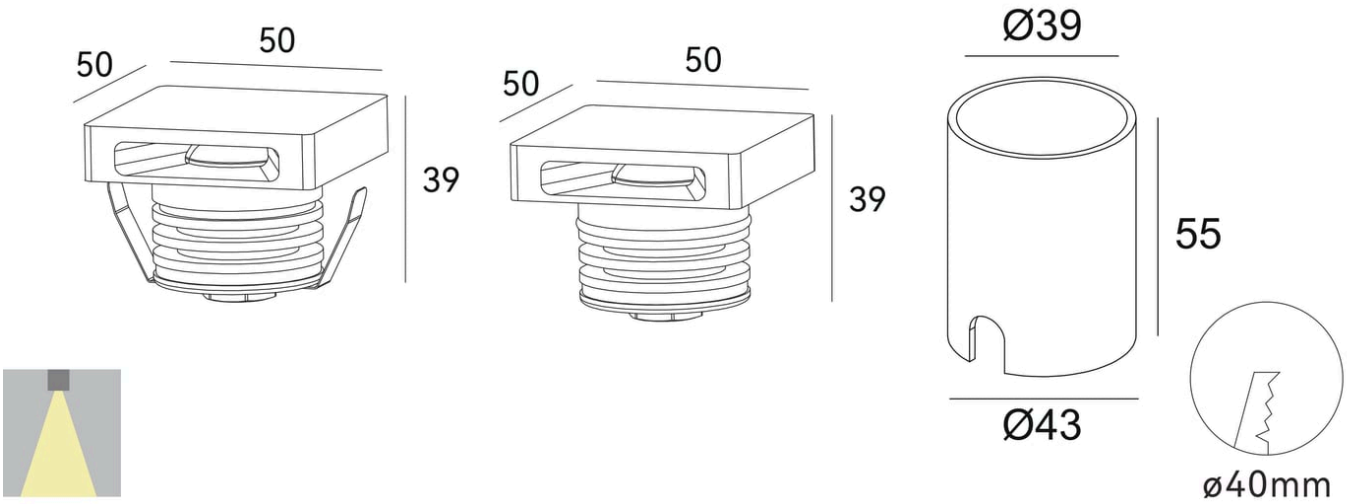


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1203	2 W	max 3 V	100 lm	97 CRI	50 × 50 × 39 mm (flange); body Ø39/Ø43 × 55 mm	Ø40 mm	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1203, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.


DL1203, 3 W, 3000 K, 26° beam, measured

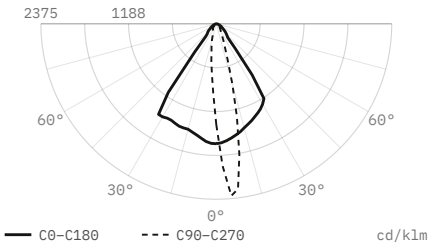


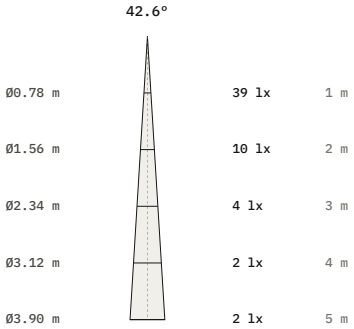

Luminous flux	24 lm
Efficacy	8 lm/W
Peak intensity	57 cd, 2,375 cd/klm
Beam angle (50%)	42.6°
Field angle (10%)	65.8°
Cut-off angle (2.5%)	64°
Flux 0–30° / 30–60° / 60–90°	65.5 / 29.1 / 5.4 %
Size	50 × 50 × 39 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 6 February 2026

DL1203, 2 W, wide distribution

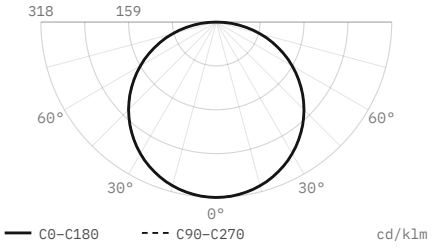

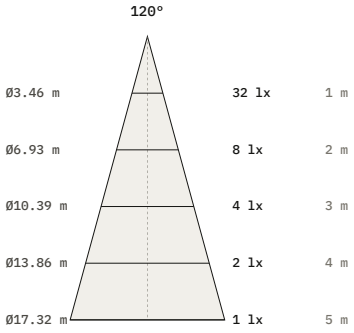

Luminous flux	100 lm
Efficacy	50 lm/W
Peak intensity	32 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	50 × 50 × 39 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.