Wall Lamps

Star DL1220

Wall light



Wall light.

- Ceiling cut-out Ø32 mm
- LED source: Citizen

Voltage	Luminous flux	Colour temperature
max 3 V, 24 V DC	50 / 110 lm	2700 K, 3000 K, 4000 K
CRI	**IP rating**	**Certifications**
97 CRI	IP65	CE
Mounting	**Finishes**	
Recessed, Wall	White, Black	


Models

Code	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1220	max 3 V, 24 V DC	50 / 110 lm	97 CRI	37 × 37 × 32 mm; housing Ø31/Ø36 × 45 mm	Ø32 mm	350 / 700 mA

Finishes



Black





White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1220, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1220, wide distribution

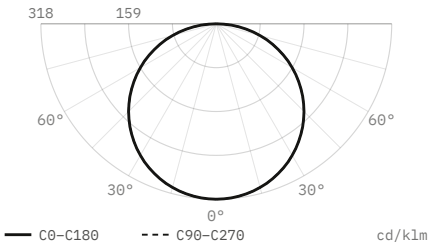

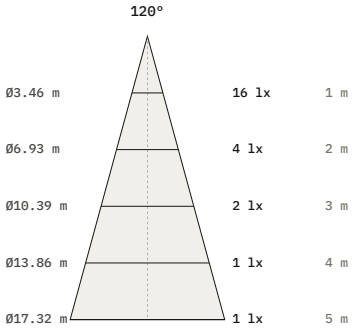

Luminous flux	**50 lm**
Peak intensity	**16 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**37 × 37 × 32 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.