
Outdoor

Star DL1635

Outdoor luminaire

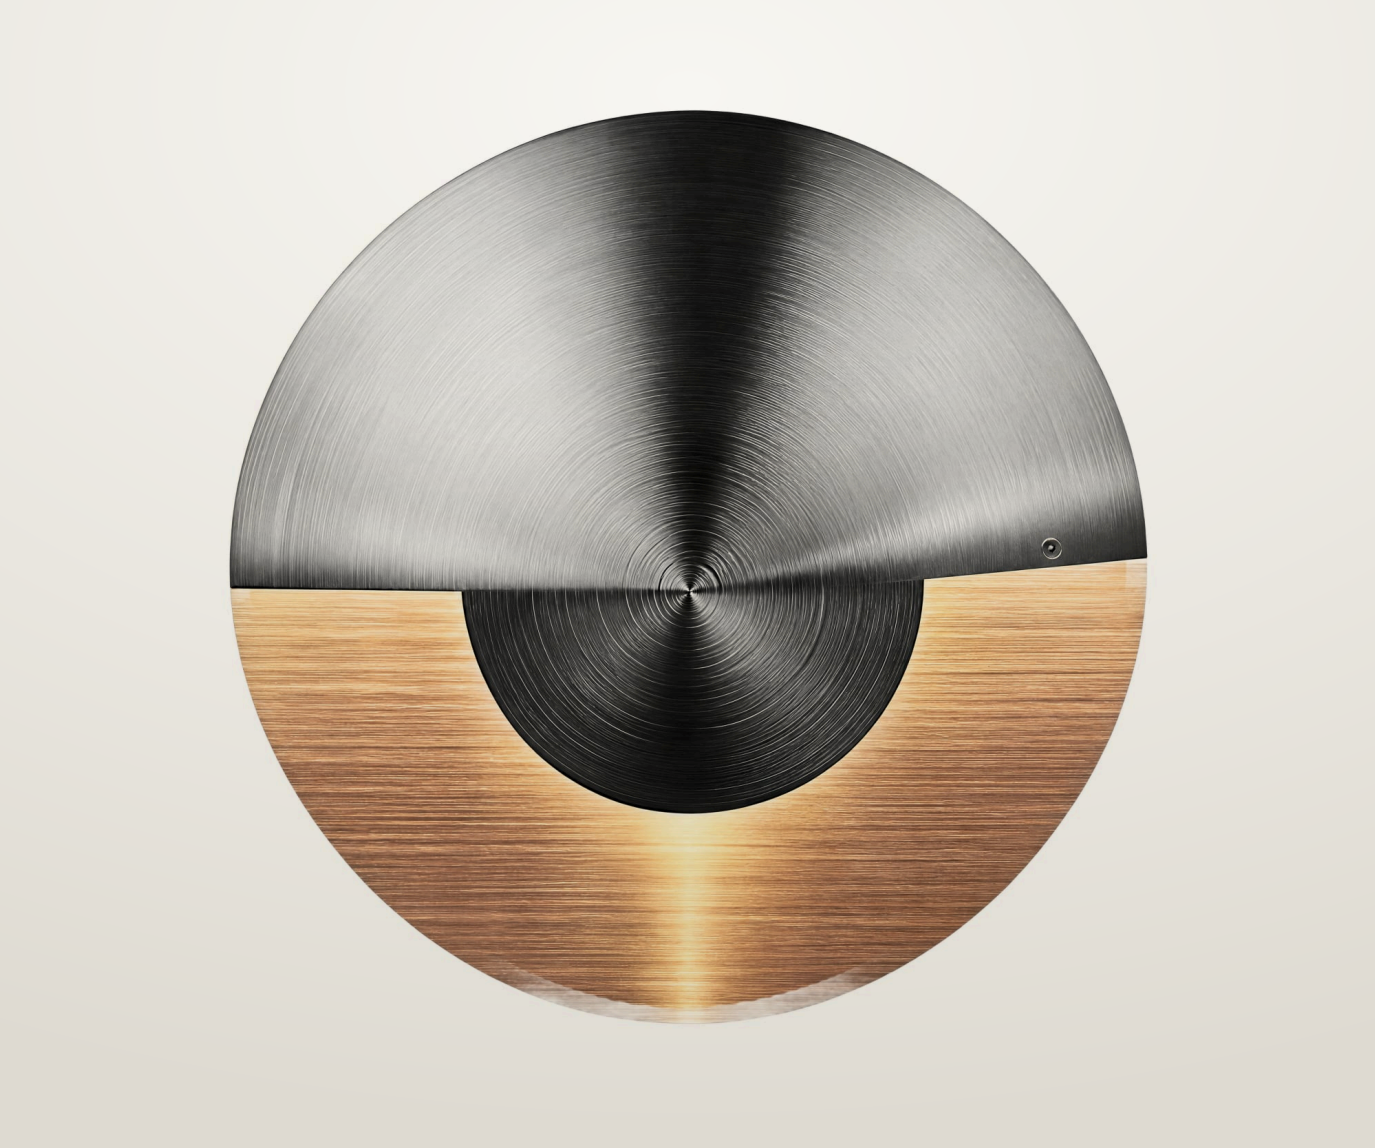



Outdoor luminaire. 1, 3 or 5 W. 2700, 3000, 4000 K. IP65/67. 97 CRI.


- Ceiling cut-out Ø34 / Ø49 / Ø116 mm
- LED source: Citizen


Power **1 W, 3 W, 5 W**	Voltage **24 V DC, max 3 V, 24 V DC, 230 V AC**	Luminous flux **40–450 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	IP rating **IP65/67**
Certifications **CE**	Mounting **Floor, Recessed, Wall**	Finishes **Black**

Dimensions

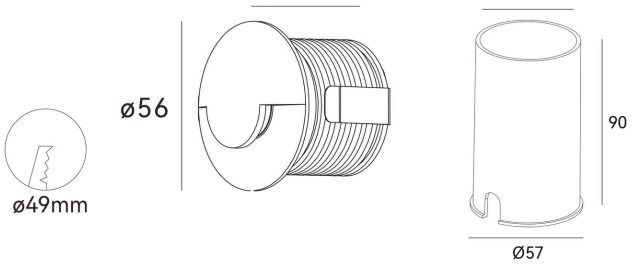

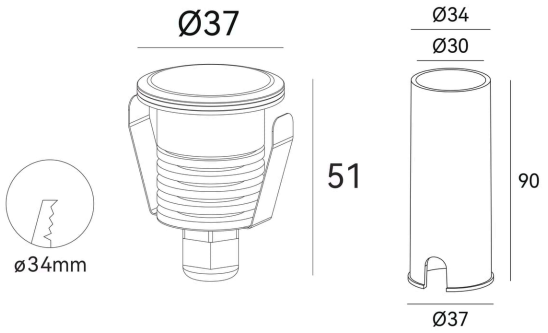

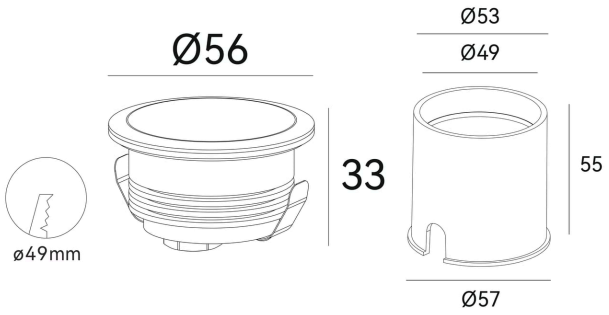

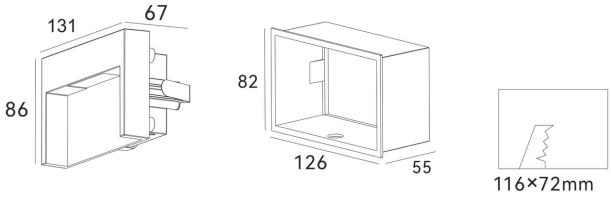


Models


Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1635	316L stainless steel inground, 24 V DC 3 W	3 W	24 V DC	160 lm	97 CRI	Ø56 × 65 mm	Ø49 mm	
DL1640			max 3 V, 24 V DC	40 lm	97 CRI	Ø37 × 51 mm	Ø34 mm	350 / 700 mA
DL1713		1 W	24 V DC	150 lm	97 CRI	Ø56 × 33 mm	Ø49 mm	
WL0045		5 W	230 V AC	450 lm	97 CRI	W131 x H86 x D67 mm	Ø116 mm	

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0045, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0045, 5 W, wide distribution

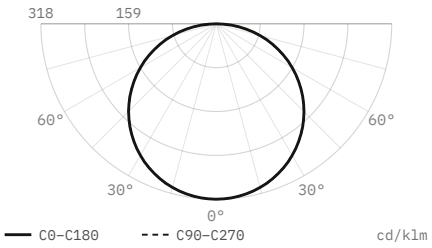

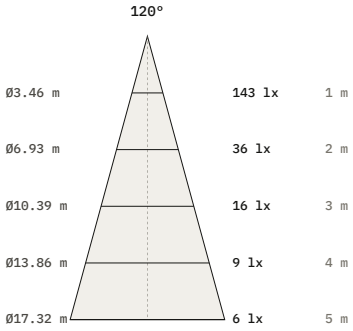

Luminous flux	450 lm
Efficacy	90 lm/W
Peak intensity	143 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	131 × 0 × 86 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.