Ceiling

SU-STAR-1203

Surface luminaire




Surface luminaire. 10 W. 24° or 36° beam. 2700, 3000, 4000 K. IP54. 97 CRI.

- LED source: Citizen
- UGR <12 (24°), <15 (36°)

Power	Voltage	Colour temperature
10 W	36 V	2700 K, 3000 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	24°, 36°	IP54
Mounting	**Control**	**Finishes**
Surface	On/Off	White, Black, Silver, Brass, Bronze

Dimensions

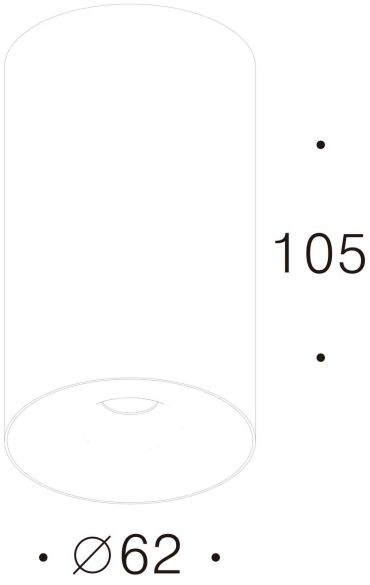

Models

Code	Power	Voltage	CRI	Size	Beam	Notes
SU-STAR-1203	10 W	36 V	97 CRI	Ø62 × 105 mm	24° 36°	250 mA


Finishes




Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-STAR-1203, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


SU-STAR-1203, 10 W, 24° beam

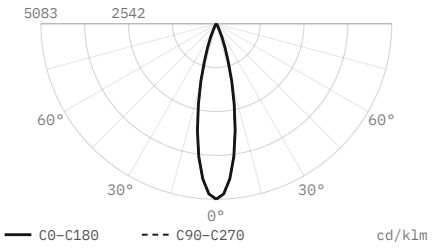


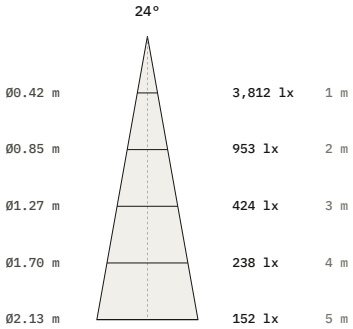

Luminous flux	**750 lm**
Efficacy	**75 lm/W**
Peak intensity	**3,812 cd, 5,083 cd/klm**
Beam angle (50%)	**24°**
Field angle (10%)	**43.7°**
Cut-off angle (2.5%)	**27.5°**
Flux 0–30° / 30–60° / 60–90°	**98.7 / 1.3 / 0 %**
Size	**Ø62 × 105 mm**
Data	**Estimated from catalogue data**

SU-STAR-1203, 10 W, 36° beam

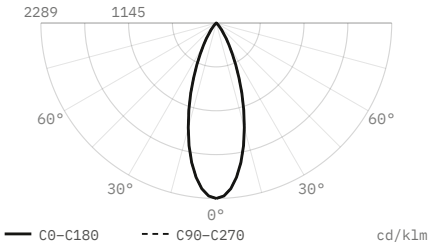

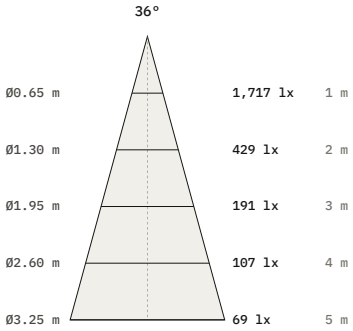

Luminous flux	**750 lm**
Efficacy	**75 lm/W**
Peak intensity	**1,717 cd, 2,289 cd/klm**
Beam angle (50%)	**36°**
Field angle (10%)	**65.6°**
Cut-off angle (2.5%)	**41.5°**
Flux 0–30° / 30–60° / 60–90°	**86.1 / 13.9 / 0 %**
Size	**Ø62 × 105 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.