
Outdoor

Stone

Outdoor luminaire

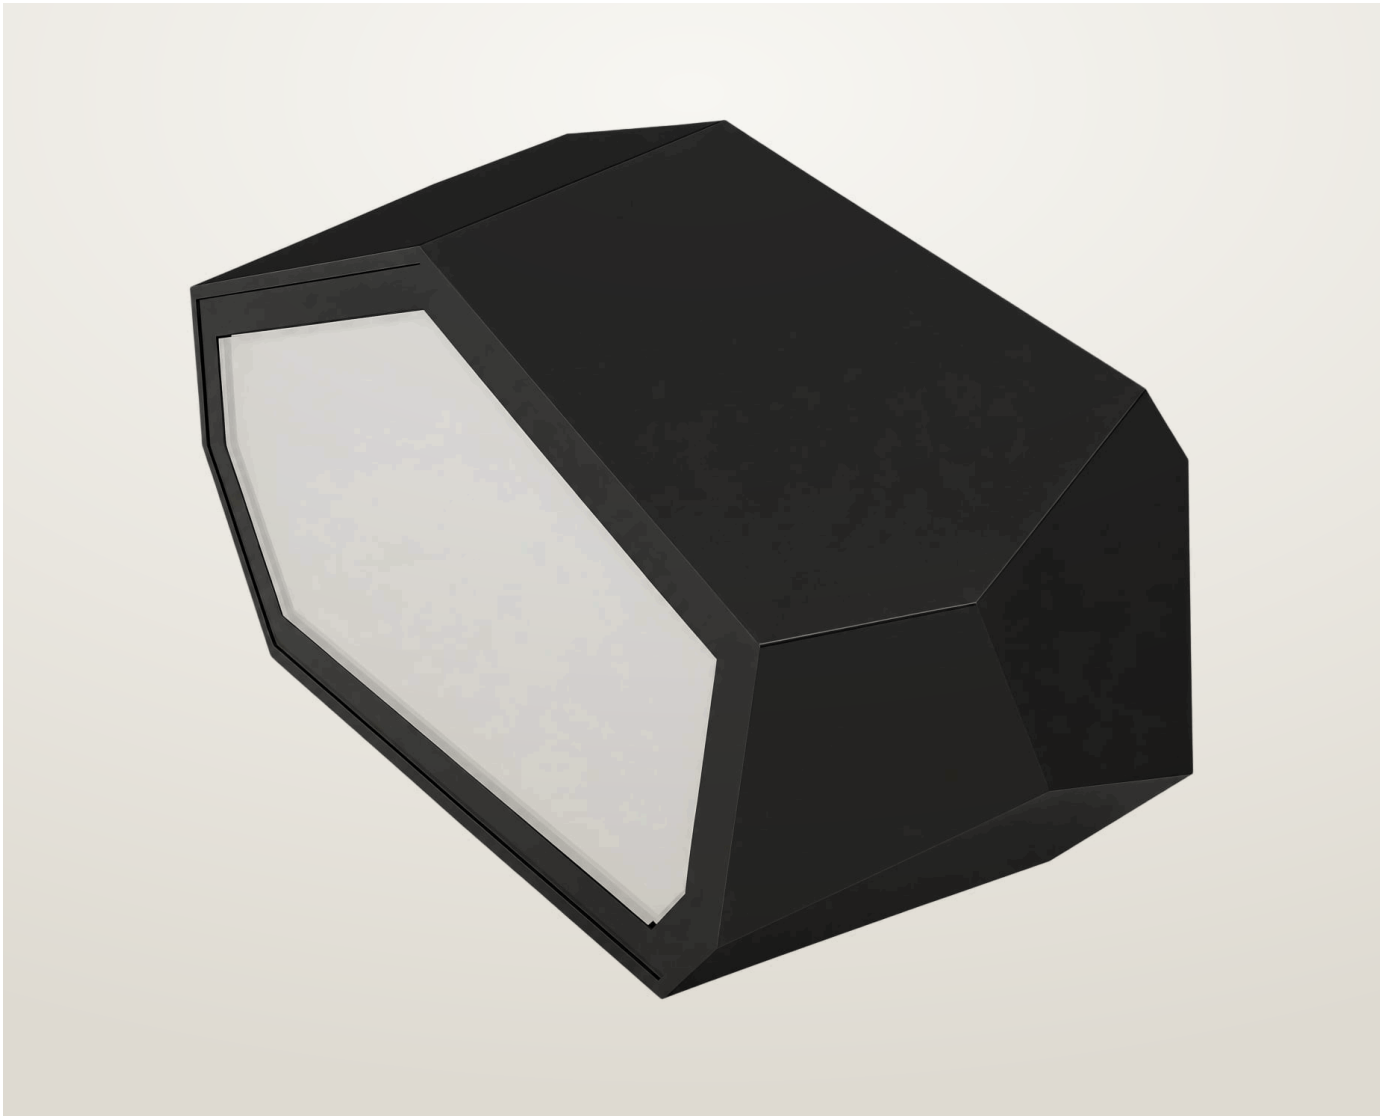


Outdoor luminaire. 5 W. 2700, 3000, 4000 K.
IP65/66/67. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
5 W	24 V DC, 100–305 V AC, 90–305 V AC, 200–240 V AC, 100–240 V AC	2700 K, 3000 K, 4000 K
CRI	**IP rating**	**Mounting**
97 CRI	IP65/66/67	Wall
Control	**Finishes**	
On/Off, DALI, Triac	Black	

Dimensions

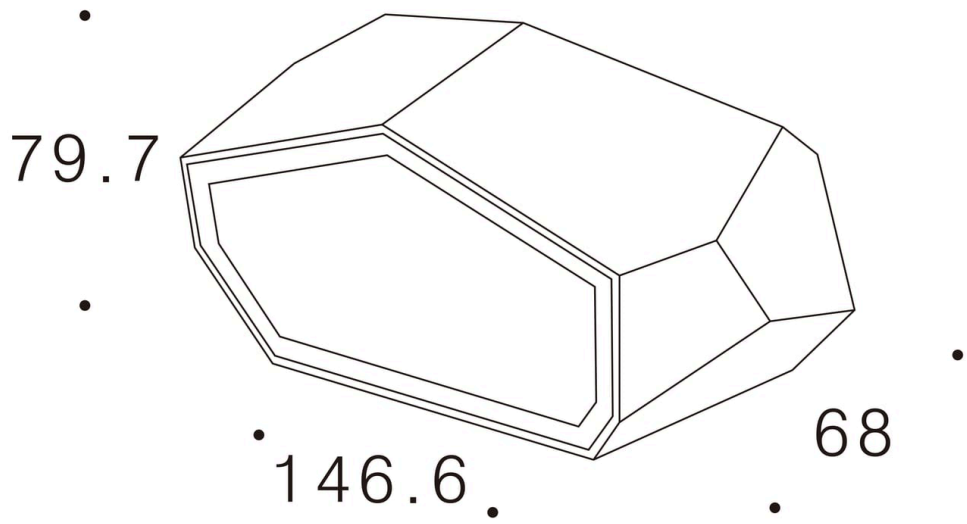


Models


Code	Version	Power	Voltage	CRI	Size
WA-Stone-0501		5 W	24 V DC	97 CRI	146.6 × 79.7 × 68 mm
OUT-Stone-P01	Driver, ON/OFF		100–305 V AC	97 CRI	
OUT-Stone-P02	Driver, DALI		90–305 V AC	97 CRI	
OUT-Stone-P03	Driver, 0–10 V/1–10 V		200–240 V AC	97 CRI	
OUT-Stone-P04	Driver, triac		200–240 V AC	97 CRI	
OUT-Stone-P05	Driver, DALI		100–240 V AC	97 CRI	

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WA-Stone-0501, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WA-Stone-0501, 5 W, wide distribution

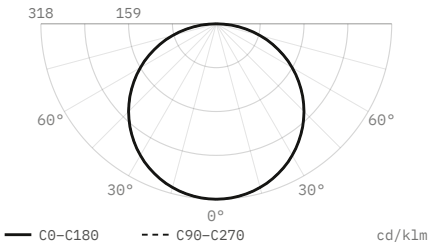

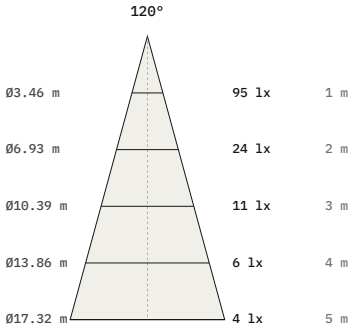

Luminous flux	**300 lm**
Efficacy	**60 lm/W**
Peak intensity	**95 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**146.6 × 79.7 × 68 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.