Ceiling

M22 1207

Surface luminaire




Surface luminaire. 15 W. Three beam angles, 30° to 60°. 2700, 3000, 4000, 5000 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
15 W	36 V	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**IP rating**
97 CRI	30°, 45°, 60°	IP65
Mounting	**Control**	**Finishes**
Surface	On/Off	Black

Dimensions

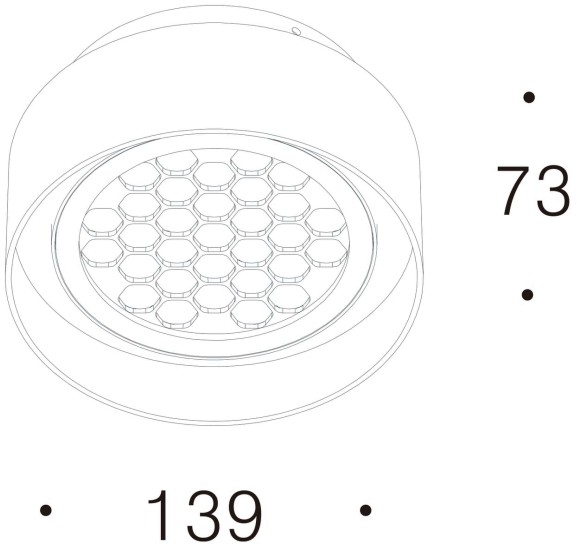


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
SU-M22-1207	15 W	36 V	97 CRI	Ø139 × 73 mm	30° 45° 60°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-M22-1207, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


SU-M22-1207, 15 W, 30° beam

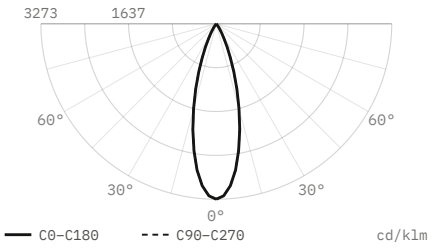


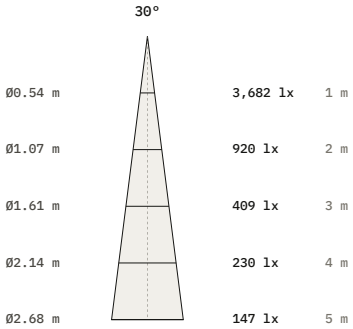

Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	3,682 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	Ø139 × 73 mm
Data	Estimated from catalogue data


SU-M22-1207, 15 W, 45° beam

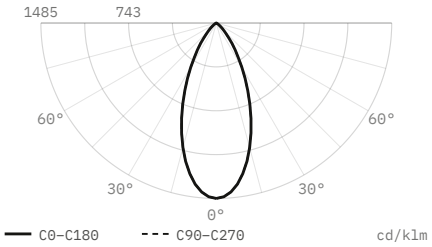


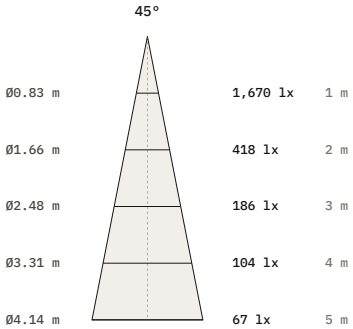

Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	1,670 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	Ø139 × 73 mm
Data	Estimated from catalogue data

SU-M22-1207, 15 W, 60° beam

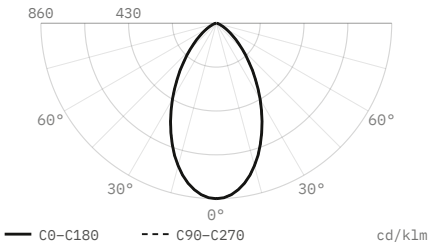

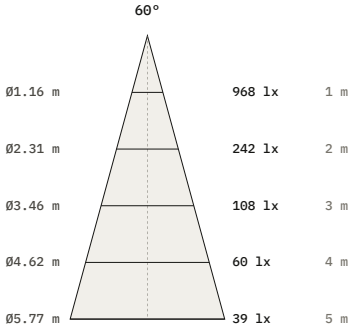

Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	968 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø139 × 73 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.