
Linear

SU-M8-1202

Linear luminaire

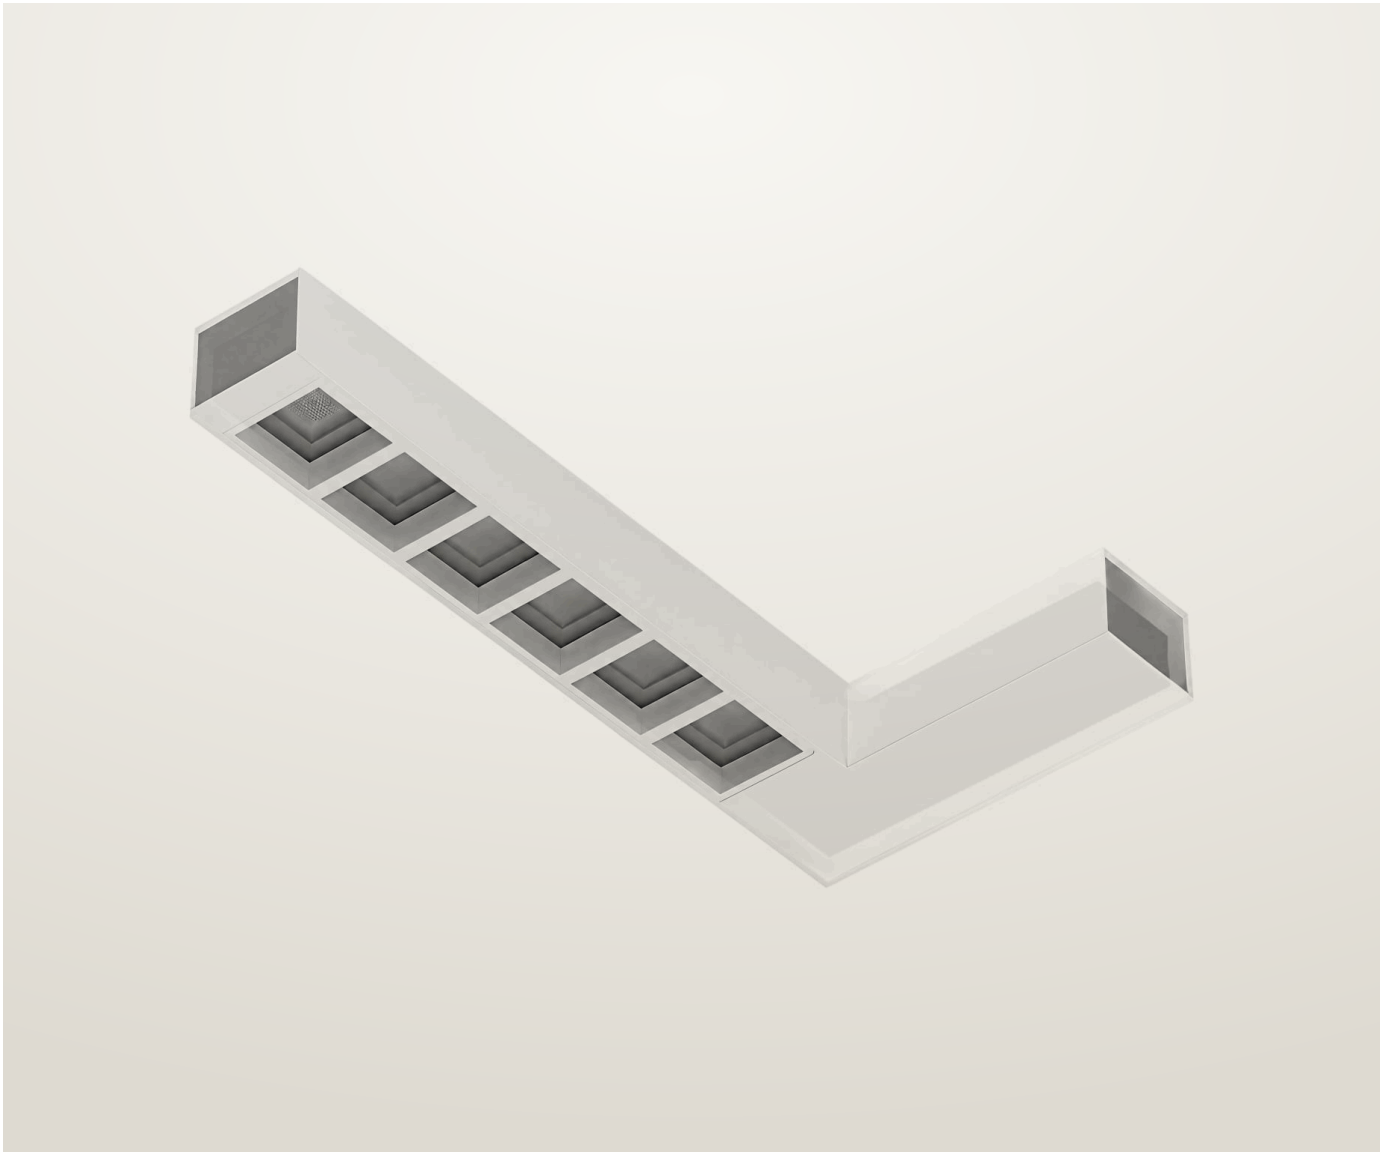


Linear luminaire. 12 W. 65° or 80° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
12 W	36 V	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**IP rating**
97 CRI	65°, 80°	IP20
Mounting	**Control**	**Finishes**
Surface	On/Off, Triac	Black

Dimensions

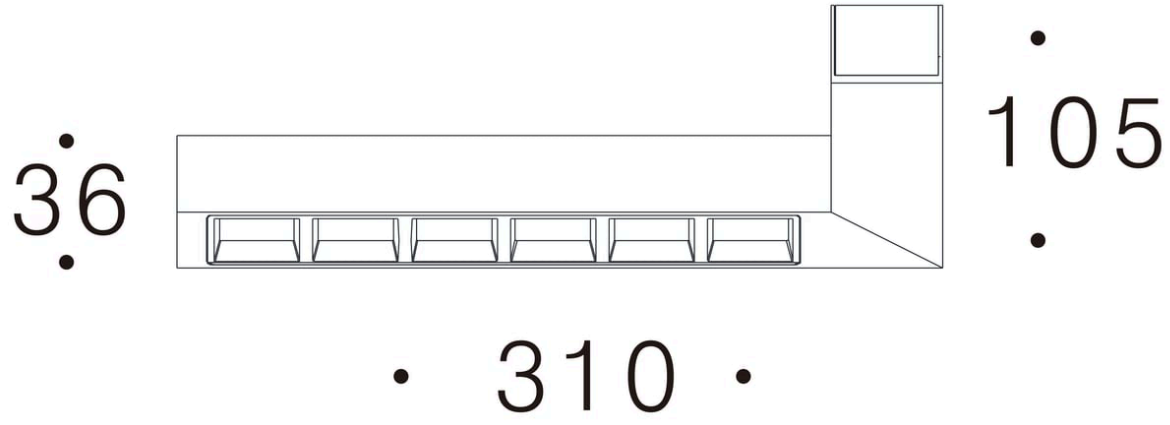


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
SU-M8-1202	12 W	36 V	97 CRI	310 × 105 × 36 mm	65° 80°	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-M8-1202, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


SU-M8-1202, 12 W, 65° beam

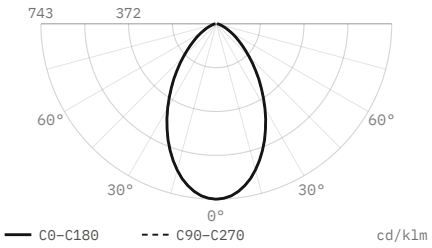


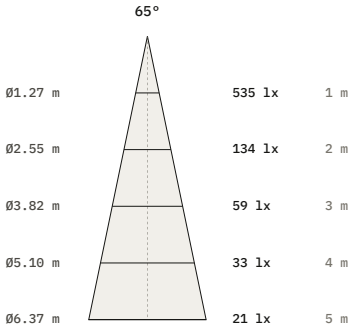

Luminous flux	**720 lm**
Efficacy	**60 lm/W**
Peak intensity	**535 cd, 743 cd/klm**
Beam angle (50%)	**65°**
Field angle (10%)	**118.5°**
Cut-off angle (2.5%)	**74.5°**
Flux 0–30° / 30–60° / 60–90°	**47.3 / 45.2 / 7.5 %**
Size	**310 × 105 × 36 mm**
Data	**Estimated from catalogue data**

SU-M8-1202, 12 W, 80° beam

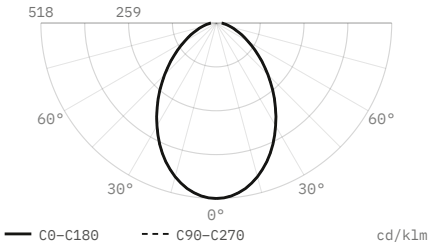

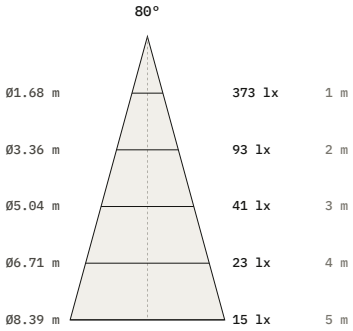

Luminous flux	**720 lm**
Efficacy	**60 lm/W**
Peak intensity	**373 cd, 518 cd/klm**
Beam angle (50%)	**80°**
Field angle (10%)	**145.8°**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**36.2 / 48.2 / 15.7 %**
Size	**310 × 105 × 36 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.