Suspension

Tour Forty8 TR0271

Pendant




Pendant. 7 W. 35° or 50° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **7 W**	Voltage **48 V DC**	Luminous flux **560 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **35°, 50°**
IP rating **IP20**	Certifications **CE**	Mounting **Suspended, Magnetic track**
Finishes **Black**		

Dimensions

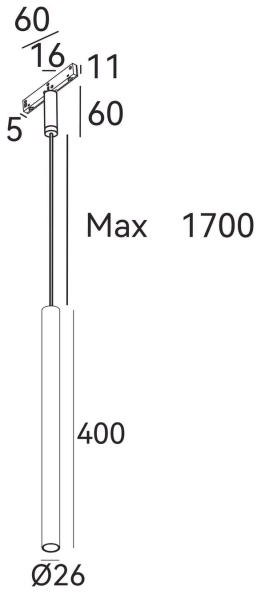


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0271	7 W	48 V DC	560 lm	97 CRI	Ø26 × 400 mm	35° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0271, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


TR0271, 7 W, 35° beam

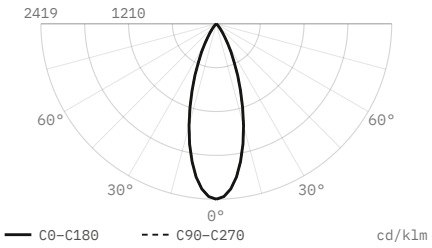


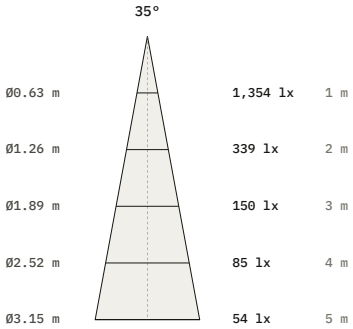

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	1,354 cd, 2,419 cd/klm
Beam angle (50%)	35°
Field angle (10%)	63.8°
Cut-off angle (2.5%)	40°
Flux 0–30° / 30–60° / 60–90°	87.6 / 12.4 / 0 %
Size	Ø26 × 400 mm
Data	Calculated from catalogue data

TR0271, 7 W, 50° beam

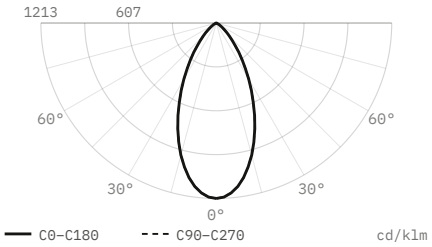

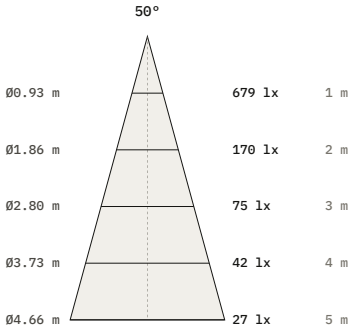

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	679 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø26 × 400 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.