Linear

Tour Forty8 TR0290

Linear track luminaire




Linear track luminaire. 5 W. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
5 W	48 V DC	400 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Magnetic track	Black

Dimensions

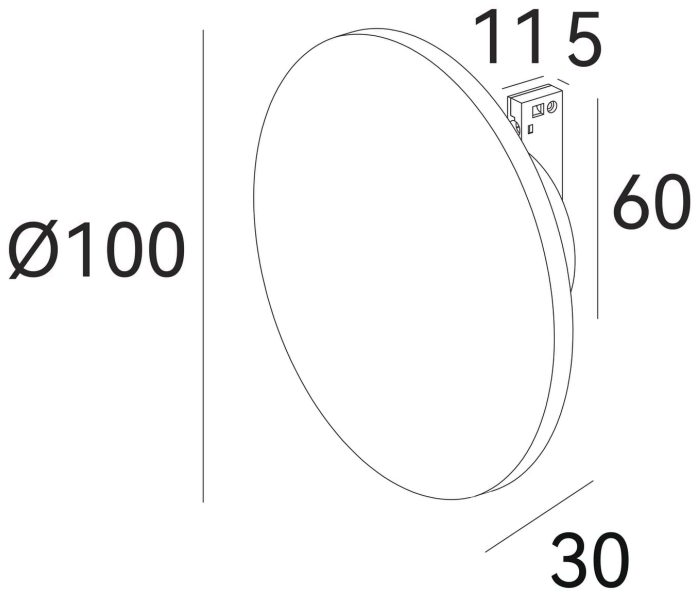


Models


Code	Power	Voltage	Flux	CRI	Size
TR0290	5 W	48 V DC	400 lm	97 CRI	Ø100 × 30 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0290, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0290, 5 W, wide distribution

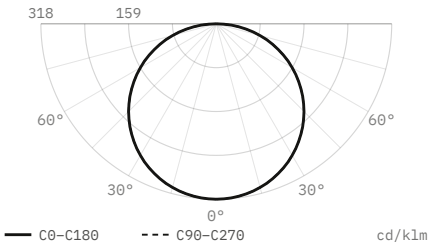

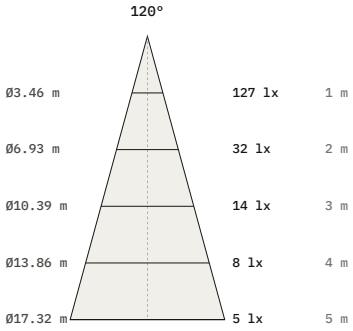

Luminous flux	400 lm
Efficacy	80 lm/W
Peak intensity	127 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø100 × 30 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.